



Victaulic

# General Catalog



**G-103-AP**

UPDATED 1/2010

 **victaulic**<sup>®</sup>  
Piping. Systems. Solutions.

# Piping. Systems. Solutions.



Worldwide leader  
in mechanical pipe  
joining solutions








## Welcome to Victaulic.

The worldwide leader in mechanical pipe joining solutions. Since pioneering grooved end technology for mechanical pipe joining in 1925, Victaulic has been providing customers the world over with innovative, reliable piping systems solutions for multiple applications and markets.

Headquartered in the US with offices in Canada, Europe, the Middle East, United Kingdom, China and Belgium, Victaulic works closely with facility owners, engineers and contractors, in the installation of systems that compress schedules, reduce risk, improve productivity and facilitate system maintenance and expansion.

## Technology Timeline

Since 1925, Victaulic has been at the forefront of mechanical piping systems innovation with over 1,500 patents for piping related products.

- 1925**  Victaulic introduces the first grooved end coupling, the "Victory Joint"
- 1946**  First field-grade cut groovers brought to market
- 1957**  Victaulic introduces roll grooving
- 1979**  First mechanical coupling for joining high density polyethylene (HDPE) pipe
- 1983**  First angled-bolt pad rigid coupling introduced
- 2005**  Advanced Groove System large diameter pipe joining system introduced
- 2006**  Victaulic introduces installation-ready technology



### Multiple markets served

Victaulic piping systems solutions span many markets. Our piping systems are found around the world in thousands of applications – from commercial comfort piping systems; industrial process and utility piping; residential and commercial fire protection systems; oil and offshore drilling platforms; coal and mineral mining operations; and water and wastewater plants and facilities.

### Victaulic facilities worldwide

Our global presence as a company ensures that our worldwide customers are served with speed and efficiency. Victaulic engineering and sales support personnel are ready to assist you with the details of your project, regardless of the location.

Manufacturing facilities in the US, Poland, China, and Canada combined with a worldwide distribution and delivery system means Victaulic products are accessible from virtually any location around the world. Please consult the back of this catalog or our website for worldwide contact information.



### Piping systems innovation

Our customers know us for bringing a steady stream of product innovations to the marketplace year after year – innovations that significantly improve piping system performance; improve user productivity; and meet the specific design criteria of very complex piping system design challenges.

Victaulic ingenuity is driven in part from listening to our customers, and our commitment to finding practical solutions to the world's most demanding engineering and system installation challenges.

## table of contents

- ii Global Solutions
- iv Grooved End Technology
- vi Approvals and Industry Standards
- viii Design Data
- 18-1 Product Index
- 19-2 Support and Services
- PRODUCTS**
- 1-1 Couplings
- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 19-1 Piping Software



## Global Solutions

A world of applications at work

### **Our solutions are truly global.**

Victaulic piping systems solutions are found in some of the world's most stunning and challenging engineering projects – buildings that arguably “push the design and construction envelope.”

### **Custom solutions for demanding challenges**

Whether new construction or retrofit, Victaulic delivers a level of versatility unmatched in mechanical piping systems technology for today's engineering marvels.

Victaulic solutions provide superior design flexibility, the ability to accommodate seismic moments, noise and vibration attenuation, system access, system scalability, installation-friendly products and service, and more.

## Projects spanning the globe

The projects illustrated here are just a few of the many buildings around the world for which Victaulic has provided innovative piping solutions.

For additional information on these and many other projects around the world, please visit [www.victaulic.com](http://www.victaulic.com) and click on Global Solutions.

# Victaulic



**UNITED STATES**  
Hoover Dam



**UNITED ARAB EMIRATES**  
Jumeirah Burj Al Arab and Beach Hotels



**CHINA**  
Beijing National Stadium



**CANADA**  
La Chateau Frontenac



**FRANCE**  
La Grande Arche de la Défense



**MALAYSIA**  
Petronas Twin Towers



- UNITED STATES
- CANADA
- EUROPE
- MIDDLE EAST
- CENTRAL & SOUTH AMERICA
- ASIA PACIFIC

# Grooved End Technology

The worldwide standard in mechanical piping systems




The Victaulic grooved end piping system is the most versatile, economical and reliable piping system available. It is significantly faster to install than welded systems, while providing design versatility other systems cannot provide.

The system is designed for roll grooved or cut grooved standard pipe or roll grooved light wall pipe. A complete line of grooving tools is available to quickly and efficiently groove pipe in the shop or at the job site.


# Victaulic

## Features




### RIGIDITY

Rigidity is achieved with standard couplings. The unique angled pad design of Zero-Flex and other couplings provides positive clamping of the pipe to resist torsional and flexural loads.




### NOISE AND VIBRATION ATTENUATION

The basic design of independently grooved pipe sections reduces noise and vibration transmission, thus delivering superior vibration attenuation throughout the system.




### SYSTEM MAINTENANCE AND EXPANSION

Coupling disassembly provides easy access for maintenance or system expansion. Victaulic butterfly valves provide "dead-end" shut-off service to isolate equipment.




### FLEXIBILITY

The Victaulic grooved end solution accommodates expansion/contraction/deflection and enables designing that takes advantage of these built-in system features.



### SEISMIC STRESS ABSORPTION

The full engagement of the housing keys into grooves around the pipe circumference provides significant pressure restraint and end load capability to withstand pipe movement from internal and external sources.



### ALIGNMENT EASE

The grooved system allows full rotation of the pipe and system components before tightening so that proper alignment can be achieved.

## Reinventing Innovation

The result of continuous research and development, today's Victaulic system has evolved since it was first introduced in 1925. But the basic concept hasn't changed.

Product innovation is a Victaulic hallmark. We are dedicated to finding faster, easier and more reliable ways to mechanically join pipe.



## Accepted Worldwide

Victaulic grooved end, plain end and other piping system components are tested and accepted for a variety of services throughout the world by the primary code and approval bodies.

A partial listing of the many agencies, associations, code group laboratories and organizations which have accepted, listed and tested Victaulic products are shown on the facing page. Copies of specific standards can be obtained by contacting your local Victaulic representative, or by requesting publication 02.02.





**GENERAL CODE GROUPS,  
ASSOCIATIONS, LABORATORIES  
AND APPROVAL BODIES**



**ABS**  
American Bureau of Shipping

**ACS**  
Attestation de Conformité Sanitaire



**ANSI**  
American National  
Standards Institute

**ANSI/AWWA**  
American Water Works  
Association – C-606

**API**  
American Petroleum Institute –  
API Std. 5L, Sect. 7.5

**ARPA**  
Agenzia Regionale per la  
Protezione dell'Ambiente

**AS**  
AS4041-1992 Australian Standard  
(3.24.10)

**ASHRAE**  
American Society of Heating,  
Refrigerating and Air Conditioning  
Engineers

**ASME**  
American Society of  
Mechanical Engineers

- Power Piping, B-31.1
- Chemical Plant and Petroleum  
Refinery Piping, B-31.3
- Refrigeration Piping, B-31.5
- Building Services Piping, B-31.9
- Slurry Pipelines, B-31.11

**ASTM**  
American Society  
of Testing and Materials

- F-1476 Couplings
- F-1548 Fittings
- F-1155 Shipbuilding

**ATEX**  
Grade E and T gaskets  
in compliance with the  
ATEX directive 94/9/EC



**BBA**  
British Board of Agrément



**BOCA**  
Building Officials and  
Code Administrators



**BV**  
Bureau Veritas

**CCCF**  
China Certification Center  
for Fire Products3

**CE**  
**0026**  
**CE**  
Certification to the European  
Directive for Pressure  
Equipment (PED)  
Certification to the European  
Directive for Construction  
Products (CPD)

**CNBOP**  
Centrum Naukowo-Badawcze  
Ochrony Przeciwpozarowej

**CNPP APSAD**  
Centre National de Prévention  
et de Protection

**CSA**  
Canadian Standards Association –  
B-242, registered to CAN 3-Z299.3

**cULus**  
Underwriter's Laboratories, Inc. -  
Listed for the fire protection ser-  
vices

**DIN GÖST TÜV**  
Zertifizierungssystem für Produkte

**DNV**  
Det Norske Veritas

**DVGW**  
Deutscher Verein des  
Gas- und Wasserfaches e.V.

**EMI**  
Epitesugyi Minosgellenorzo  
Innovacious

**FM**  
FM Approvals –  
Approved for fire protection services

**GL**  
Germanischer Lloyd

**GOST R**  
**HDB**  
Singapore Housing  
Development Board

Hong Kong Fire Services Board

**IAPMO**  
International Association of  
Plumbing & Mechanical Officials

Korean Registry of Shipping

Krajaska Hygienicka

**INSTAL**

- AT/2000
- AT/2002
- AT/2003



**LLOYD'S**  
Lloyd's Register of Shipping

**LPCB**  
Loss Prevention Certification Board

New Zealand Insurance Council

New Zealand Building Act (1991)

**NFPA**  
National Fire Protection Association

**ClassNK**  
**NK**  
Nippon Kaiji Kyokai

**NSF**  
NSF/ANSI 61  
Standard 61 for potable  
water service

**NY-MEA**  
New York Materials and  
Equipment Acceptance

**ÖVGW**  
Österreichische Vereinigung für  
das Gas- und Wasserfach

**PZH**  
Panstwowy Zaklad Higieny

**RINA**  
Registro Italiano Navale

**LISTED**  
**SBCI**  
Southern Building Code Congress  
International – Standard Plumbing  
and Mechanical Code

**SBSC**  
Svensk Brand & Säkerhets  
Certifiering AB

**SRIPS**  
Service de Recherche et  
d'Ingénierie en Protection Sanitaire

**SSL**  
Scientific Services Laboratory

Standards Australia

**SVGW**  
Schweizerischer Verein des  
Gas- und Wasserfaches

**TSU**  
Technický Skúšobný Ústav  
Piešťany, š.p.

**UL**  
Underwriter's Laboratories, Inc. –  
Listed for fire protection services

**ULC**  
ULC Underwriter's Laboratories  
of Canada – Listed for fire  
protection services

**VdS**  
Verband der  
Schadenverhütung GmbH

**VKF**  
Vereinigung Kantonaler  
Feuerversicherungen

**W**  
Standards Australia Watermark  
Certification

**WRAS**  
Water Regulations  
Advisory Scheme

**GOVERNMENT AGENCIES**

Bureau of Marine Inspection –  
Salt and fresh water, oil transfer

Bureau of Public Roads –  
Div. of Bridges – Drain lines  
and bridge crossings

Canadian Coast Guard

U.S. Coast Guard – Approves  
each vessel individually

**COE**  
Corps of Engineers –  
CEGS 15000

**FAA**  
Federal Aviation Administration –  
HVAC, Plumbing, Fire Protection

**FHA**  
Federal Housing Administration

**GSA**  
General Services  
Administration – 15000 Series

**MIL**  
Military Specifications

- MILP-10388 Fittings
- MIL-C-10387 Couplings
- MIL-P-11087A(CE)  
Steel Pipe, Grooved
- MIL-I-45208 Inspection Procedure

**NASA**  
National Aeronautics and Space  
Administration – 15000 Series

**NAVFAC**  
Naval Facilities Engineering  
Command – NFGS 15000 Series

**NIH**  
National Institute of Health  
(Dept. of Health) – 15000 Series

**TVA**  
Tennessee Valley Authority –  
Fire protection, storm drains

**VA**  
Veterans Affairs – 15000 Series

# Design Data

## Introduction

This Victaulic General Catalog has been written for the piping system installer, designer, specification writer and owner as a basic reference guide for data about Victaulic mechanical piping methods. This catalog is organized to provide information in the context and form most readily usable. For easy identification of major sections of interest, see the condensed table of contents on pg. 1-1, for a fully detailed index, see pg. 16-1. For more detailed information, consult Design Data, Section 26.01.

## Important Information

Victaulic has developed, in more than 80 years in mechanical piping, variations of piping practice for use on a wide variety of piping materials.

Victaulic standard grooved pipe couplings are designed for use with pipe grooved to meet Victaulic groove specifications and Victaulic grooved end fittings, valves, and related grooved end components only. They are not intended for use with plain end pipe and/or fittings. Victaulic plain end couplings are designed for use only with plain end or beveled end steel pipe (unless otherwise indicated) and Victaulic plain end fittings.

**Victaulic plain end couplings must not be used with grooved end or threaded end pipe and/or fittings. Nor are they intended for use with Advanced Groove System (AGS) components used on 350–600 mm/14–24" pipe sizes.**

Pipe must be prepared to meet Victaulic specifications outlined for each specific product style. Performance data listed herein is based on proper pipe preparation. The proper gasket must be selected for the service intended. **It should be noted that there are various services for which Victaulic gaskets are not recommended. Reference should always be made to the latest Victaulic Gasket Selection Guide (request publication 05.01) for specific gasket service recommendations and for a listing of services which are not recommended. Gaskets for Victaulic products always must be lubricated for proper assembly.** Gasket lubricant must meet manufacturer's specifications. Thorough lubrication of the gasket exterior, including the lips and/or pipe ends and housing interiors, is essential to prevent gasket pinching. Lubrication assists proper gasket seating and alignment during installation.

Victaulic has a complete line of tools for preparing pipe to Victaulic specifications. Use of these tools is recommended in preparing pipe to receive Victaulic products. Always read and understand the Tool Operating Instructions supplied with every Victaulic tool prior to using any tools. All data contained herein, is subject to change without notice.

# Design Data

## Notice

The technical and performance data, weights, dimensions and specifications published in this catalog supersede all previously published data.

Victaulic Company maintains a policy of continual product improvement and, therefore, reserves the right to change product specifications, designs, and standard equipment without notice and without incurring obligation.

For the most up-to-date Victaulic product information, please visit [www.victaulic.com](http://www.victaulic.com).

The material presented in this catalog is intended for piping design reference in utilization of Victaulic products for their intended application. It is not intended as a substitute for competent, professional assistance which is an obvious requisite to any specific application.

## Design

Reference should always be made to design information available at no charge on request from Victaulic. Good piping practices should always prevail. Specific pressures, temperatures, external or internal loads, performance standards and tolerances must never be exceeded. Many applications require recognition of special conditions, code requirements and use of safety factors. Qualified engineers must make these decisions.

**While every effort has been made to ensure its accuracy, Victaulic Company, its subsidiaries and affiliated companies, make no express or implied warranty of any kind respecting the information contained in this catalog or the material referred to herein.**

**Anyone making use of the information or material contained herein does so at their own risk and assumes any and all liability resulting from such use.**

## Installation

Reference should always be made to the specific Victaulic Field Installation Handbook for the product you are installing. The following is a list of handbooks that can be requested for free from Victaulic:

I-100	General Handbook
I-500	Pressfit System Handbook *
I-600	Copper Products Handbook
I-900	HDPE Products Handbook

Handbooks are included with each shipment of Victaulic products for complete installation and assembly data, and are available in PDF format on our website at [www.victaulic.com](http://www.victaulic.com).

All rights reserved. No part of this Victaulic catalog may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopy, recording or otherwise, without the prior written permission of Victaulic Company.

© Copyright 2010, Victaulic Company.

® Registered trademark of Victaulic Company.

\* Available in Australia and New Zealand only.

# Design Data

## Global Pipe Size Designations

Victaulic product data is utilized worldwide and all technical data is shown in both imperial (U.S.) and metric terms. The following chart shows a comparison between typical metric and IPS pipe sizes.

### IMPORTANT NOTES:

Nominal designations are used where the actual OD of the pipe matches the ANSI size. Otherwise both the nominal and actual OD are listed. China sizes are listed as actual OD in mm.

China sizes in orange are tubing sizes.

\* Nominal sizes

Nominal Imperial Inches – Size Group	Outside Diameter mm/Spec Ref	DIN mm	JIS mm	ANSI inches	China Standard (GB) mm
1/2	21.3 mm	15	15 A/21.7 mm	1/2	15*/21.3 mm
3/4	26.7 mm	20/26.9 mm	20 A/27.2 mm	3/4	20*/26.9 mm
1	33.4 mm	25/33.7 mm	25 A/34 mm	1	25*/33.7 mm
1 1/4	42.2 mm	32/42.4 mm	32 A/42.7 mm	1 1/4	32*/42.4 mm
1 1/2	48.3 mm	40	40 A/48.6 mm	1 1/2	40*/48.3 mm
2	60.3 mm	DN & ISO 50	50 A/60.5 mm	2	50*/60.3 mm
2 1/2	73.1 mm	—	—	2 1/2	—
3	76.1 mm DIN/ISO (3 OD)	DN & ISO 65	65 A/76.3 mm	—	65*/76.1 mm
	88.9 mm	DN & ISO 80	JIS 80 A	3	80*/88.9 mm
4	108 mm China and old DIN	DIN 108 mm	—	—	108 mm
	114.3 mm	DN & ISO 100	JIS 100 A	4	100*/114.3 mm
5	133 mm China and old DIN	DIN 133 mm	—	—	133 mm
	139.7 mm DIN/ISO (5.5 OD)	DN & ISO 125	125 A/139.8 mm	—	125*/139.7 mm
	141.3 mm	—	—	5	—
6	159 mm China and old DIN	DIN 159 mm	—	—	159 mm
	165.1 mm JIS (6.5 OD)	—	150 A/165.2 mm	—	—
	168.3 mm	DN & ISO 150	—	6	150*/168.3 mm
8	216.3 JIS	—	JIS 200 A	—	—
	219.1 mm	DN 200	—	8	219.1 mm
10	267.4 JIS	—	JIS 250 A	—	—
	273 mm	DN 250	—	10	273 mm
12	318.5 JIS	—	JIS 300 A	—	—
	323.9 mm	DN 300	—	12	323.9 mm
14	355.6 mm	DN 350	JIS 350 A	14	355.6 mm
	377 mm China	—	—	—	377 mm
16	406.4 mm	DN 400	JIS 400 A	16	406.4 mm
	426 mm China	—	—	—	426 mm
18	457.2 mm	DN 450	JIS 450 A	18	457.2 mm
	480 mm China	—	—	—	480 mm
20	508 mm	DN 500	JIS 500 A	20	508 mm
	530 mm China	—	—	—	530 mm
22	558.8 mm	—	JIS 550 A	22	559 mm
	580 mm China	—	—	—	580 mm
24	610 mm	DN 600	JIS 600 A	24	610 mm
	630 mm China	—	—	—	630 mm
26	660 mm	—	JIS 650 A	26	660 mm
28	711 mm	DN 700	—	28	711 mm
30	762 mm	—	—	30	762 mm
32	813 mm	DN 800	—	32	813 mm
34	864 mm	—	—	34	864 mm
36	914 mm	DN 900	—	36	914 mm
40	1016 mm	DN 1000	—	40	1016 mm
42	1067 mm	DN 1050	—	42	1067 mm
44	1118 mm	DN 1100	—	44	1118 mm
46	1168 mm	DN 1150	—	46	1168 mm
48	1219 mm	DN 1200	—	48	1219 mm

# Design Data

## Imperial (U.S.)/Metric Conversion Chart

This chart is provided as a guide for converting imperial and metric measurements provided within this catalog.

Convert Imperial (U.S.) to Metric				Convert Metric to Imperial (U.S.)		
25.4	×	Inches (In.)	↔	Millimeters (mm)	×	0.03937
0.3048	×	Feet (Ft.)	↔	Meters (m)	×	3.281
0.4536	×	Pounds (Lbs.)	↔	Kilograms (kg)	×	2.205
28.35	×	Ounces (Oz.)	↔	Grams (g)	×	0.03527
6.894	×	Pressure (psi)	↔	Kilopascals (kPa)	×	0.145
.069	×	Pressure (psi)	↔	Bar	×	14.5
4.45	×	End Load (Lbs.)	↔	Newtons (N)	×	0.2248
1.356	×	Torque (Lb. Ft.)	↔	Newton Meters (N•m)	×	0.738
$F - 32 \div 1.8$		Temp. (°F)	↔	Celsius (°C)		$C + 17.78 \times 1.8$
745.7	×	Horsepower (hp)	↔	Watts (w)	×	$1.341 \times 10^3$
3.785	×	Gal. per Min. (GPM)	↔	Liters per min. (L/M)	×	0.2642
3.7865	×	$10^{-3}$ Gal. per Min. (GPM)	↔	Cubic Meters per min. (m <sup>3</sup> /m)	×	264.2

# Couplings

- Victaulic, the originator and innovator of grooved coupling technology, offers a variety of coupling sizes and styles for almost any piping application.
- Consisting of three basic components — the housing, the gasket, and bolts and nuts — Victaulic couplings provide a simple, economical method for joining carbon steel, copper, stainless steel, aluminum, HDPE and PVC plastic piping systems.
- Victaulic couplings provide designers with versatility not found in other pipe joining methods. Victaulic rigid and flexible couplings can be combined to allow for thermal growth within the system. Additionally, the use of three consecutive flexible couplings reduces noise and vibration and eliminates costly specialty noise dampeners.

## Advanced Groove System **AGS™**



For 350–1525 mm/14–60" piping systems  
Victaulic offers Advanced Groove System (AGS)  
couplings, see pg. 5-1.

### Zero-Flex® Rigid Coupling

STYLE 07, PG. 1-5  
AGS STYLE W07, PG. 5-3



### Standard Flexible Coupling

STYLE 77, PG. 1-6  
AGS STYLE W77, PG. 5-4




### Flexible Coupling

STYLE 75, PG. 1-8



### Vic-Flange® Adapter ANSI Class 150

STYLE 741, PG. 1-9



### Vic-Flange Adapter ANSI Class 300

STYLE 743, PG. 1-10



### Reducing Coupling

STYLE 750, PG. 1-11







### Snap-Joint® Coupling

STYLE 78, PG. 1-12



# Couplings

## Gasket Types

Gasket Type	Style 07	Style 77	Style 75	Style 770	Style 750	Style 78	Style 72 †	Style 791	Style HP-70	Style HP-70ES
STANDARD 	●	●	●	●		●	●	●	●	
REDUCING 					●					
FLUSHSEAL 	●	●	●	●		●		●		
ENDSEAL 										●

† Separate gasket specifically designed for outlet couplings.

### Outlet Coupling

STYLE 72, PG. 1-13



### Vic-Boltless® Coupling

STYLE 791 AND STYLE 792  
ASSEMBLY TOOL, PG. 1-14



### High Pressure Coupling

STYLE 808, PG. 1-15



### Rigid Coupling

STYLE HP-70, PG. 1-16



### Endseal® Coupling for Plastic Coated Pipe

STYLE HP-70ES, PG. 1-17



### EndSeal Fittings for Plastic Coated Pipe

PG. 1-18



The special groove profile and gasket design of “ES” products contribute to higher pressure ratings and longer life service.

### PRODUCTS

#### 1-1 Couplings

- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software

# Couplings

## Rigid Coupling Systems and Performance §

Rigid couplings have a unique, patented angled pad design which constricts the housing keys into the groove around the full circumference to create a rigid joint. The housings slide on the angled pads rather than mating squarely.

This sliding movement also forces the key sections into opposed contact on the inside and the outside groove edges, which locks the coupling onto the pipe ends and creates a rigid connection.

These rigid couplings provide a rigid joint allowing no expansion/contraction or linear movement.

The couplings will position the pipe ends so that there is a fixed pipe end separation that may be considered during design and installation (see chart below).

Rigid couplings create a rigid joint, useful for risers, mechanical rooms and other areas where flexibility is not desired. Zero-Flex Style O7 and Style W07 AGS couplings are designed to provide rigidity to permit hanging to ASME B31.1 Power Piping Code, ASME B31.9 Building Services Piping Code and NFPA 13 Sprinkler Systems.

Size		Actual Outside Diameter mm Inches	Allow. Pipe End Sep.  mm Inches
Nominal Size mm Inches			
20 ¾		26.9 1.050	1.2 0.05
25 1		33.7 1.315	1.2 0.05
32 1 ¼		42.4 1.660	1.2 0.05
40 1 ½		48.3 1.900	1.2 0.05
50 2		60.3 2.375	1.7 0.07
65 2 ½		73.0 2.875	1.7 0.07
76.1 mm		76.1 3.000	1.7 0.07
80 3		88.9 3.500	1.7 0.07
108.0 mm		108.0 4.250	4.1 0.16
100 4		114.3 4.500	4.1 0.16
133.0 mm		133.0 5.250	4.1 0.16
139.7 mm		139.7 5.500	4.1 0.16

Size		Actual Outside Diameter mm Inches	Allow. Pipe End Sep.  mm Inches
Nominal Size mm Inches			
125 5		141.3 5.563	4.1 0.16
159.0 mm		159.0 6.250	4.1 0.16
165.1 mm		165.1 6.500	4.1 0.16
150 6		168.3 6.625	4.1 0.16
200 8		219.1 8.625	4.8 0.19
250 10		273.0 10.750	3.3 0.13
300 12		323.9 12.750	3.3 0.13
350 14*		355.6 14.000	3.3 0.13
400 16*		406.4 16.000	3.3 0.13
450 18*		457.0 18.000	3.3 0.13
500 20*		559.0 20.000	3.3 0.13
600 24*		610.0 24.000	3.3 0.13

§ Except for HP-70 and HP-70ES coupling which have the following allowable pipe end separation:

- HP-70:  
50 – 100 mm/2 – 4" sizes: 3.6 mm/0.14"  
150 – 400 mm/6 – 16" sizes: 6.4 mm/0.25"
- HP-70ES:  
50 – 100 mm/2 – 4" sizes: 4.8 mm/0.19"  
150 – 200 mm/6 – 8" sizes: 6.7 mm/0.27"  
250 – 300 mm/10 – 12" sizes: 7.1 mm/0.28"

\* These figures do NOT apply to 350 – 1525 mm/14 – 60" Style W07 AGS rigid couplings. Allowable pipe end separation is 6.9 mm/0.25" for all sizes of Style W07.

### IMPORTANT NOTES:

ONLY FLEXIBLE couplings are recommended for the installation of expansion loops as stated in Calculating and Accommodating Pipe Line Thermal Growth Section 26.02. All eight couplings assembling the four elbows of the loop must be flexible. The use of rigid couplings to install the straight run adjacent to the expansion loop is a recommended practice.

This also applies to couplings installed on the perpendicular leg(s) at the end(s) of a straight pipe run or on pipe line offsets. If system movement is to be accommodated, flexible couplings must be utilized.

Rigid couplings must NOT be utilized to accommodate any system movement.

Should you have any questions regarding the proper use of our products, contact Engineering Services at [engrserv@victaulic.com](mailto:engrserv@victaulic.com).

### WARNING

**Depressurize and drain the piping system before attempting to install, remove, or adjust any Victaulic piping products. Failure to do so could result in personal injury, property damage, joint leakage and/or joint failure.**



# Couplings

## Flexible Coupling Systems and Performance §

Standard flexible grooved-type couplings allow controlled angular, linear and rotational movement at each joint to accommodate expansion/contraction (see note below), settling, vibration, noise and other piping system movement. These features provide advantages in designing piping systems but must be considered when determining hanger and support spacing and location.

Victaulic couplings offer superior vibration attenuation characteristics to both flexible metal and elastomeric flexible arch-type connectors.

Independent vibration testing data (request publication 26.04) verifies that three Victaulic couplings in close proximity to a vibration source (pump, equipment, etc.) provide superior vibration attenuation in piping systems.

Both flexible and rigid couplings offer reduced construction schedules, plus the convenience of a union at every joint and the proven pressure-responsive “C” shaped Victaulic gasket. Both type products fit into standard roll or cut grooved pipe and provide the security of full circumferential engagement of the coupling housing into the groove for high pressure and end load service.

Size		Allow. Pipe End Sep. †	Deflect. Fr. C <sub>L</sub> †	
Nominal Size mm Inches	Actual Outside Diameter mm Inches		mm Inches	Degrees per Coupling
20 ¾	26.9 1.050	0 – 1.6 0 – 0.06	3° 24'	60 0.72
25 1	33.7 1.315	0 – 1.6 0 – 0.06	2° 43'	48 0.57
32 1¼	42.4 1.660	0 – 1.6 0 – 0.06	2° 10'	38 0.45
40 1½	48.3 1.900	0 – 1.6 0 – 0.06	1° 56'	33 0.40
50 2	60.3 2.375	0 – 1.6 0 – 0.06	1° 31'	27 0.32
65 2½	73.0 2.875	0 – 1.6 0 – 0.06	1° 15'	22 0.26
76.1 mm	76.1 3.000	0 – 1.6 0 – 0.06	1° 12'	22 0.26
80 3	88.9 3.500	0 – 1.6 0 – 0.06	1° 2'	18 0.22
90 3½	101.6 4.000	0 – 1.6 0 – 0.06	0° 54'	16 0.19
108.0 mm	108.0 4.250	0 – 3.2 0 – 0.13	1° 41'	29 0.35
100 4	114.3 4.500	0 – 3.2 0 – 0.13	1° 36'	28 0.34
120 4½	127.0 5.000	0 – 3.2 0 – 0.13	1° 26'	21 0.25
133.0 mm	133.0 5.250	0 – 3.2 0 – 0.13	1° 21'	23 0.28
139.7 mm	139.7 5.500	0 – 3.2 0 – 0.13	1° 18'	23 0.28
125 5	141.3 5.563	0 – 3.2 0 – 0.13	1° 18'	22 0.27
152.4 mm	152.4 6.000	0 – 3.2 0 – 0.13	1° 12'	17 0.21

Size		Allow. Pipe End Sep. †	Deflect. Fr. C <sub>L</sub> †	
Nominal Size mm Inches	Actual Outside Diameter mm Inches		mm Inches	Degrees per Coupling
159.0 mm	159.0 6.250	0 – 3.2 0 – 0.13	1° 9'	20 0.24
165.1 mm	165.1 6.500	0 – 3.2 0 – 0.13	1° 6'	19 0.23
150 6	168.3 6.625	0 – 3.2 0 – 0.13	1° 5'	19 0.23
203.2 mm	203.2 8.000	0 – 3.2 0 – 0.13	0° 54'	13 0.16
200 8	219.1 8.625	0 – 3.2 0 – 0.13	0° 50'	15 0.18
254.0 mm	254.0 10.000	0 – 3.2 0 – 0.13	0° 43'	13 0.15
250 10	273.0 10.750	0 – 3.2 0 – 0.13	0° 40'	12 0.14
304.8 mm	304.8 12.000	0 – 3.2 0 – 0.13	0° 36'	11 0.13
300 12	323.9 12.750	0 – 3.2 0 – 0.13	0° 34'	10 0.12
350 14 @	355.6 14.000	0 – 3.2 0 – 0.13	0° 31'	9 0.11
375 15	381.0 15.000	0 – 3.2 0 – 0.13	0° 29'	8 0.10
400 16 @	406.4 16.000	0 – 3.2 0 – 0.13	0° 27'	8 0.10
450 18 @	457.0 18.000	0 – 3.2 0 – 0.13	0° 24'	7 0.08
500 20 @	508.0 20.000	0 – 3.2 0 – 0.13	0° 22'	7 0.08
550 22	559.0 22.000	0 – 3.2 0 – 0.13	0° 19'	6 0.07
600 24 @	610.0 24.000	0 – 3.2 0 – 0.13	0° 18'	6 0.07

§ Except for Style 72 outlet couplings. Contact Victaulic for details.

† NOTE: These values are based on standard roll grooved pipe. Figures for standard cut grooved pipe may be doubled. See notes below.

@ Allowable pipe end separation for Style W77 AGS flexible couplings in this size range are 3.1 – 9.5 mm/0.125 – 0.375".

### \* GENERAL NOTES:

**Working Pressure and End Load** are total, from all internal and external loads, based on standard weight (ANSI) steel pipe, standard **roll** or **cut** grooved in accordance with Victaulic specifications. Contact Victaulic for performance on other pipe.

**Warning: For one time field test only**, the Maximum Joint Working Pressure may be increased to 1½ times the figures shown (except Style HP-70ES).

**Allowable Pipe End Separation and Deflection** figures show the maximum nominal range of movement available at each joint for standard **roll** grooved pipe. Figures for standard **cut** grooved pipe may be doubled. These figures are maximums; for design and installation purposes these figures should be reduced by: 50% for 20 – 90 mm/¾ – 3½"; 25% for 100 mm/4" and larger.

# Couplings

## Zero-Flex Rigid Coupling

### STYLE 07

For Complete Information Request Publication **06.02**




- Angled-pad design for rigidity
- Resists flexural and torsional loads
- Pressure rated up to 5170kPa/750psi
- Sizes from 25–300mm/1–12"

Size		Max. Work Pressure *	Max. End Load *	Allow. Pipe End Sep. *	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	kPa psi	N Lbs.	mm Inches	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
25 1	33.7 1.315	5175 750	2890 650	1.2 0.05	60 2.36	107 4.22	47 1.84	0.7 1.6
32 1¼	42.4 1.660	5175 750	7210 1,620	1.2 0.05	68 2.69	117 4.62	47 1.84	0.7 1.6
40 1½	48.3 1.900	5175 750	9480 2,130	1.2 0.05	75 2.94	148 5.81	47 1.84	0.7 1.6
50 2	60.3 2.375	5175 750	14775 3,320	1.7 0.07	85 3.35	147 5.78	47 1.84	1.0 2.3
65 2½	73.0 2.875	5175 750	21695 4,875	1.7 0.07	98 3.88	162 6.38	47 1.84	1.2 2.6
76.1 mm	76.1 3.000	5175 750	23585 5,300	1.7 0.07	107 4.21	168 6.61	47 1.84	1.6 3.6
80 3	88.9 3.500	5175 750	32105 7,215	1.7 0.07	115 4.54	173 6.81	47 1.84	1.4 3.0
108.0 mm	108.0 4.250	5175 750	47325 10,635	4.1 0.16	141 5.56	203 7.98	53 2.07	2.4 5.2
100 4	114.3 4.500	5175 750	53065 11,925	4.1 0.16	148 5.81	209 8.21	53 2.07	2.4 5.3
133.0 mm	133.0 5.250	4825 700	67395 15,145	4.1 0.16	170 6.69	244 9.60	53 2.07	3.4 7.4
139.7 mm	139.7 5.500	4825 700	73980 16,625	4.1 0.16	176 6.94	249 9.82	53 2.07	3.4 7.6
125 5	141.3 5.563	5175 750	81100 18,225	4.1 0.16	179 7.03	251 9.89	53 2.07	3.4 7.4
159.0 mm	159.0 6.250	4825 700	95520 21,465	4.1 0.16	199 7.84	268 10.54	53 2.07	4.2 9.2
165.1 mm	165.1 6.500	4825 700	103305 23,225	4.1 0.16	207 8.13	275 10.84	53 2.07	3.8 8.3
150 6	168.3 6.625	4825 700	107380 24,130	4.1 0.16	210 8.26	275 10.83	53 2.07	3.8 8.3
200 8 S	219.1 8.625	4130 600	155750 35,000	4.8 0.19	268 10.54	349 13.74	64 2.51	6.8 15.1
250 10 S	273.0 10.750	3450 500	202030 45,400	3.3 0.13	327 12.86	431 16.98	65 2.56	10.7 23.5
300 12 S	323.9 12.750	2750 400	226950 51,000	3.3 0.13	377 14.86	480 18.88	65 2.56	12.8 28.2
350 – 1525 14 – 60								

**AGS**™ See Style W07, pg. 5-3, Request Publication 20.02

§ Couplings 200mm/8", 250mm/10", 300mm/12" sizes are available to JIS standards. Refer to Publication 06.17 for details.

\* Refer to General Notes on pg. 1-3.



TYPICAL FOR ALL SIZES

# Couplings

## Standard Flexible Coupling

### STYLE 77

For Complete Information  
Request Publication **06.04**




- Cross-ribbed construction design
- Provides flexibility for expansion, contraction, and deflection
- Pressure rated up to 6900 kPa/1000 psi
- Sizes from 20–600mm/¾–24" for roll or cut grooved systems. Sizes 350–600mm/14–24" for cut grooved systems only.
- For 350–1525 mm/14–60" AGS roll groove systems, see pg. 5-1

Size		Max. Work Pressure *	Max. End Load *	Allow. Pipe End Sep. *	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	kPa psi	N Lbs.	mm Inches	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
20 ¾	26.7 1.050	6900 1000	3850 865	0 – 1.6 0 – 0.06	54 2.13	102 4.00	44 1.75	0.5 1.1
25 1	33.4 1.315	6900 1000	6050 1,360	0 – 1.6 0 – 0.06	61 2.38	105 4.12	44 1.75	0.5 1.2
32 1¼	42.2 1.660	6900 1000	9610 2,160	0 – 1.6 0 – 0.06	67 2.65	127 5.00	48 1.88	0.9 2.0
40 1½	48.3 1.900	6900 1000	12615 2,835	0 – 1.6 0 – 0.06	79 3.13	137 5.38	48 1.88	1.0 2.1
50 2	60.3 2.375	6900 1000	19715 4,430	0 – 1.6 0 – 0.06	92 3.63	149 5.88	48 1.88	1.2 2.6
65 2½	73.0 2.875	6900 1000	28880 6,490	0 – 1.6 0 – 0.06	108 4.25	165 6.50	48 1.88	1.4 3.1
76.1 mm	76.1 3.000	6900 1000	31460 7,070	0 – 1.6 0 – 0.06	111 4.38	168 6.63	48 1.88	1.5 3.2
80 3	88.9 3.500	6900 1000	46810 9,620	0 – 1.6 0 – 0.06	127 5.00	181 7.13	48 1.88	1.7 3.7
90 3½	101.6 4.000	6900 1000	55915 12,565	0 – 1.6 0 – 0.06	143 5.63	210 8.25	48 1.88	2.5 5.6
108.0 mm	108.0 4.250	6900 1000	63100 14,180	0 – 3.2 0 – 0.13	152 6.00	219 8.63	54 2.13	5.0 11.0
100 4	114.3 4.500	6900 1000	70755 15,900	0 – 3.2 0 – 0.13	156 6.13	226 8.88	54 2.13	3.0 6.7
133.0 mm	133.0 5.250	6900 1000	96275 21,635	0 – 3.2 0 – 0.13	194 7.63	264 10.38	54 2.13	4.5 10.0
139.7 mm	139.7 5.500	6900 1000	105665 23,745	0 – 3.2 0 – 0.13	219 8.63	270 10.65	54 2.13	4.5 10.0
125 5	141.3 5.563	6900 1000	108135 24,300	0 – 3.2 0 – 0.13	197 7.75	270 10.65	54 2.13	4.8 10.6
159.0 mm	159.0 6.250	6900 1000	136460 30,665	0 – 3.2 0 – 0.13	219 8.63	292 11.50	54 2.13	6.0 13.2
165.1 mm	165.1 6.500	6900 1000	147660 33,185	0 – 3.2 0 – 0.13	226 8.88	295 11.63	54 2.13	6.0 13.2
150 6	168.3 6.625	6900 1000	153390 34,470	0 – 3.2 0 – 0.13	219 8.63	302 11.88	54 2.13	5.4 12.0
200 8 §	219.1 8.625	5500 800	207995 46,740	0 – 3.2 0 – 0.13	279 11.00	375 14.75	63 2.50	9.4 20.8
250 10 §	273.0 10.750	5500 800	326100 73,280	0 – 3.2 0 – 0.13	346 13.63	435 17.13	67 2.63	14.1 31.1
300 12 §	323.9 12.750	5500 800	453900 102,000	0 – 3.2 0 – 0.13	397 15.63	489 19.25	67 2.63	12.6 27.8

TABLE CONTINUED ON PG. 1-7

§ Couplings 200 mm/8", 250 mm/10", 300 mm/12" sizes are available to JIS standards. Refer to Publication 06.17 for details.

\* Refer to General Notes on pg. 1-3.



TYPICAL 20–300 mm/¾–12" SIZES

# Couplings

## Standard Flexible Coupling

### STYLE 77

For Complete Information Request Publication **06.04**




- Cross-ribbed construction design
- Provides flexibility for expansion, contraction, and deflection
- Pressure rated up to 6900 kPa/1000 psi
- Sizes from 20–600 mm/¾–24"
- For 350–1525 mm/14–60" AGS roll groove systems, see pg. 5-1

Size		Max. Work Pressure *	Max. End Load *	Allow. Pipe End Sep. *	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	kPa psi	N Lbs.	mm Inches	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
<b>TABLE CONTINUED FROM PG. 1-6</b>								
350 14#	355.6 14.000	2065 300	205500 46,180	0 – 3.2 0 – 0.13	422 16.63	505 19.88	73 2.88	16.1 35.6
377.0 mmμ	377.0 14.842	2065 300	230845 51,875	0 – 3.2 0 – 0.13	442 17.39	531 20.96	71 2.80	22.1 48.8
400 16#	406.4 16.000	2065 300	268425 60,320	0 – 3.2 0 – 0.13	482 19.00	562 22.13	76 3.00	23.2 51.1
426.0 mmμ	426.0 16.772	2065 300	294795 66,245	0 – 3.2 0 – 0.13	500 19.69	581 22.92	74 2.92	25.7 56.7
450 18#	457.2 18.000	2065 300	339710 76,340	0 – 3.2 0 – 0.13	543 21.38	622 24.50	80 3.13	29.2 64.4
480.0 mmμ	480.0 18.898	2065 300	374265 84,105	0 – 3.2 0 – 0.13	569 22.38	655 25.86	77 3.04	35.0 77.2
500 20#	508.0 20.000	2065 300	418300 94,000	0 – 3.2 0 – 0.13	600 23.63	692 27.25	80 3.13	41.4 91.2
530.0 mmμ	530.0 20.866	2065 300	456280 102,535	0 – 3.2 0 – 0.13	617 24.29	704 27.80	77 3.07	41.6 91.7
550 22	559.0 22.000	2065 300	507300 114,000	0 – 3.2 0 – 0.13	654 25.75	749 29.50	80 3.13	41.7 92.0
580.0 mmμ	580.0 22.835	1725 250	455591 102,380	0 – 3.2 0 – 0.13	680 26.76	762 30.01	79 3.12	42.2 92.8
600 24#	609.6 24.000	1725 250	502850 113,000	0 – 3.2 0 – 0.13	704 27.75	794 31.25	80 3.13	42.6 94.0
630.0 mmμ	630.0 24.803	1725 250	457416 102,790	0 – 3.2 0 – 0.13	722 28.42	817 32.16	79 3.12	44.0 96.8
350 – 1525 14 – 60	<b>AGS™</b> See Style W77, pg. 5-3, Request Publication 20.03							


# For use on cut groove systems only. For roll grooved systems Victaulic offers the Advanced Groove System (AGS), see pg. 5-1. For cut groove fittings in this size contact our Engineered Products Group at engrprod@victaulic.com.

\* Refer to General Notes on pg. 1-3.

μ CIS size product is designed with two housings and requires two bolts.



TYPICAL 350–550 mm/14–22" SIZES



TYPICAL 600 mm/24" SIZES

# Couplings

## Flexible Coupling

### STYLE 75

For Complete Information  
Request Publication **06.05**




- For use where moderate pressures are expected and weight considerations are a factor
- 50% lighter in weight than Style 77
- Housings cast in two identical pieces in all sizes
- Pressure rated up to 3450kPa/500psi
- Sizes from 25–304.8mm/1–12"

Size		Max. Work Pressure *	Max. End Load *	Allow. Pipe End Sep. *	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	kPa psi	N Lbs.	mm Inches	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
25 1	33.4 1.315	3450 500	3025 680	0 – 1.6 0 – 0.06	61 2.38	108 4.27	45 1.77	0.6 1.3
32 1¼	42.2 1.660	3450 500	4805 1,080	0 – 1.6 0 – 0.06	68 2.68	117 4.61	45 1.77	0.6 1.4
40 1½	48.3 1.900	3450 500	6320 1,420	0 – 1.6 0 – 0.06	74 2.91	122 4.82	45 1.77	0.6 1.5
50 2	60.3 2.375	3450 500	9860 2,215	0 – 1.6 0 – 0.06	87 3.43	133 5.22	48 1.88	0.8 1.7
65 2½	73.0 2.875	3450 500	14440 3,245	0 – 1.6 0 – 0.06	98 3.88	144 5.68	48 1.88	0.9 1.9
76.1 mm	76.1 3.000	3450 500	15730 3,535	0 – 1.6 0 – 0.06	102 4.00	150 5.90	48 1.88	0.9 1.9
80 3	88.9 3.500	3450 500	21360 4,800	0 – 1.6 0 – 0.06	114 4.50	178 7.00	48 1.88	1.3 2.9
90 3½	101.6 4.000	3450 500	28035 6,300	0 – 1.6 0 – 0.06	127 5.00	191 7.50	48 1.88	1.3 2.9
108.0 mm	108.0 4.250	3100 450	28395 6,380	0 – 3.2 0 – 0.13	141 5.55	198 7.79	54 2.13	1.7 3.7
100 4	114.3 4.500	3450 500	35380 7,950	0 – 3.2 0 – 0.13	147 5.80	204 8.03	54 2.13	1.9 4.1
120 4½	127.0 5.000	3100 450	39250 8,820	0 – 3.2 0 – 0.13	156 6.13	240 9.43	54 2.13	2.5 5.5
133.0 mm	133.0 5.250	3100 450	43325 9,735	0 – 3.2 0 – 0.13	166 6.55	238 9.37	54 2.13	2.7 6.0
139.7 mm	139.7 5.500	3100 450	47460 10,665	0 – 3.2 0 – 0.13	173 6.80	244 9.59	54 2.13	2.9 6.3
125 5	141.3 5.563	3100 450	48660 10,935	0 – 3.2 0 – 0.13	175 6.88	256 10.07	54 2.13	2.6 5.8
152.4 mm	152.4 6.000	3100 450	56670 12,735	0 – 3.2 0 – 0.13	187 7.38	266 10.48	48 1.88	2.8 6.2
159.0 mm	159.0 6.250	3100 450	61405 13,800	0 – 3.2 0 – 0.13	194 7.63	266 10.49	54 2.13	3.1 6.8
165.1 mm	165.1 6.500	3100 450	66483 14,940	0 – 3.2 0 – 0.13	199 7.84	271 10.66	52 2.06	3.3 7.2
150 6	168.3 6.625	3100 450	69085 15,525	0 – 3.2 0 – 0.13	203 8.00	281 11.07	58 2.13	3.2 7.0
203.2 mm#	203.2 8.000	3100 450	100725 22,635	0 – 3.2 0 – 0.13	247 9.72	339 13.33	54 2.31	5.7 12.6
200 8	219.1 8.625	3100 450	116945 26,280	0 – 3.2 0 – 0.13	263 10.34	355 13.97	59 2.32	5.6 12.4
254.0 mm#	254.0 10.000	2400 350	122375 27,500	0 – 3.2 0 – 0.13	309 12.16	402 15.81	64 2.53	9.4 20.8
304.8 mm#	304.8 12.000	2400 350	175775 39,500	0 – 3.2 0 – 0.13	360 14.16	449 17.69	64 2.53	10.7 23.6

# Style 74 Couplings.

\* Refer to General Notes on pg. 1-3.



TYPICAL FOR ALL SIZES

# Couplings

## Vic-Flange Adapter ANSI Class 150

### STYLE 741

For Complete Information  
Request Publication **06.06**



- Directly incorporates ANSI Class 125 or Class 150 flanged components into a grooved system
- Pressure rated up to 2065 kPa/300 psi
- Sizes from 50–300 mm/2–12" are hinged
- Sizes 350–600 mm/14–24" are cast in four identical segments

Size		Max. Work Pressure *	Max. End Load *	Sealing Surface		Dimensions		Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	kPa psi	N Lbs.	A Max. mm Inches	B Min. mm Inches	W mm Inches	Z mm Inches	kg Lbs.
50 2	60.3 2.375	2065 300	5920 1,330	60 2.38	87 3.41	172 6.75	19 0.75	1.4 3.1
65 2½	73.0 2.875	2065 300	8680 1,950	73 2.88	99 3.91	200 7.87	22 0.88	2.1 4.8
80 3	88.9 3.500	2065 300	12840 2,885	89 3.50	115 4.53	211 8.29	24 0.94	2.4 5.3
100 4	114.3 4.500	2065 300	21225 4,770	114 4.50	141 5.53	251 9.87	24 0.94	3.4 7.4
125 5	141.3 5.563	2065 300	32440 7,290	141 5.56	171 6.71	277 10.90	25 1.00	3.9 8.6
165.1 mm	165.1 6.500	2065 300	44320 9,960	165 6.50	195 7.66	303 11.92	25 1.00	4.5 10.0
150 6	168.3 6.625	2065 300	46060 10,350	168 6.63	198 7.78	302 11.90	25 1.00	4.5 9.9
200 8	219.1 8.625	2065 300	77875 17,500	219 8.63	252 9.94	368 14.50	29 1.13	7.5 16.6
250 10	273.0 10.750	2065 300	121110 27,215	273 10.75	313 12.31	438 17.24	30 1.19	11.0 24.2
300 12	323.9 12.750	2065 300	170270 38,285	324 12.75	364 14.31	514 20.25	32 1.25	21.2 46.8
350 14#	355.6 14.000	2065 300	205500 46,180	356 14.00	416 16.39	622 24.50	37 1.44	28.1 62.0
400 16#	406.4 16.000	2065 300	268335 60,300	406 16.00	467 18.39	689 27.12	37 1.44	35.8 79.0
450 18#	457.0 18.000	2065 300	339700 76,340	457 18.00	508 20.00	737 29.00	40 1.56	37.3 82.3
500 20#	508.0 20.000	2065 300	419400 94,250	508 20.00	572 22.50	800 31.50	43 1.69	46.9 103.3
600 24#	610.0 24.000	2065 300	603865 135,700	610 24.00	705 27.75	914 36.00	49 1.94	64.4 142.0
350 – 600 14 – 24	<b>AGS™</b> See Style W741, pg. 5-6, Request Publication 20.04							


\* Refer to Publication 06.06 for more details.

# For cut groove systems only. For 350–600 mm/14–24" roll groove systems, AGS (Advanced Groove System) products are used. Style 741 is not compatible with the AGS system.

#### IMPORTANT NOTES:

Style 741 Vic-Flange adapters provide rigid joints when used on pipe with standard cut or roll groove dimensions and consequently allow no linear or angular movement at the joint. When used with Victaulic Series 700 butterfly valves, plastic pipe or lightwall metallic pipe, small teeth in I.D. of key section should be removed and may be used on one side of the valve. Contact Victaulic for information on AS2129 - Table E; ISO 2084 (PN10); DIN 2532 (PN10) and JIS B-2210 (10K) flanges. Total bolts required to be supplied by installer, may be ordered from Victaulic.

For restrictions on where and how Vic-Flange adapters and flange washers can be used, refer to Publication 06.06.

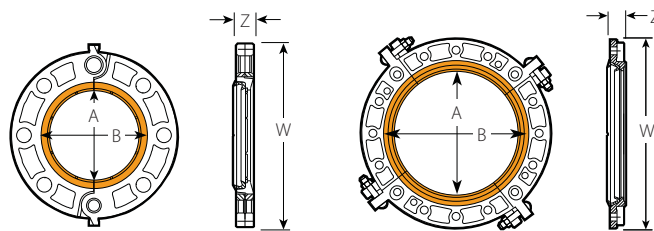

TYPICAL 50–300 mm/2–12" SIZES

Orange area of mating face must be free from gouges, undulations or deformities of any type for effective sealing.

TYPICAL 350–600 mm/14–24" SIZES

Orange area of mating face must be free from gouges, undulations or deformities of any type for effective sealing.

# Couplings

## Vic-Flange Adapter ANSI Class 300

### STYLE 743

For Complete Information  
Request Publication **06.06**



- Permits direct connection of ANSI Class 300 flanged components into a grooved system
- Designed to mate with raised-face flanges, but can be used with flat-face flanges by removing the raised projections on the outside face of the flange
- Pressure rated up to 4960 kPa/720 psi
- Sizes from 50–300 mm/2–12"


Size		Max. Work Pressure *	Max. End Load *	Sealing Surface		Dimensions		Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches			A Max. mm Inches	B Min. mm Inches	W mm Inches	Z mm Inches	
50 2	60.3 2.375	4960 720	14200 3,190	60 2.38	87 3.41	196 7.70	24 0.93	2.2 4.8
65 2½	73.0 2.875	4960 720	20780 4,670	73 2.88	99 3.91	219 8.61	27 1.06	3.4 7.4
80 3	88.9 3.500	4960 720	30815 6,925	89 3.50	115 4.53	241 9.48	30 1.18	4.1 9.1
100 4	114.3 4.500	4960 720	50930 11,445	114 4.50	141 5.53	288 11.35	33 1.31	6.9 15.3
125 5	141.3 5.563	4960 720	77875 17,500	141 5.56	171 6.72	313 12.31	36 1.43	8.0 17.7
150 6	168.3 6.625	4960 720	110380 24,805	168 6.63	198 7.78	350 13.77	38 1.50	10.6 23.4
200 8	219.1 8.625	4960 720	187100 42,045	219 8.63	252 9.94	424 16.68	43 1.68	15.6 34.3
250 10	273.0 10.750	4960 720	290650 65,315	273 10.75	313 12.31	489 19.25	49 1.93	21.9 48.3
300 12	323.9 12.750	4960 720	408870 91,880	324 12.75	364 14.31	565 22.25	52 2.06	32.0 70.5

\* Refer to Publication 06.06 for more details.

#### IMPORTANT NOTES:

Style 743 Vic-Flange adapters must be ordered as a factory assembly when connected to a Victaulic fitting or valve. Contact Victaulic for details. Total bolts required to be supplied by installer, may be ordered from Victaulic.

For restrictions on where and how Vic-Flange adapters and flange washers can be used, refer to Publication 06.06.



TYPICAL FOR ALL SIZES

Orange area of mating face must be free from gouges, undulations or deformities of any type for effective sealing.

# Couplings

## Reducing Coupling

### STYLE 750

For Complete Information  
Request Publication **06.08**




- Direct reduction on the piping run
- Designed to replace two couplings and a reducing fitting
- Special reducing gasket for pressure responsive sealing
- Pressure rated up to 3450 kPa/500 psi
- Sizes from 50×25mm/2×1" through 200×150mm/8×6"

Size		Max. Work Pressure *	Max. End Load *	Allow. Pipe End Sep. *	Dimensions			Approx. Wgt. Each
Nominal Size mm	Inches				X mm	Y mm	Z mm	
50	25	2410	4450	0 - 1.8	85	134	48	1.2
	1	350	1,000	0 - 0.07	3.38	5.28	1.88	22.7
65	40	2410	4450	0 - 1.8	85	134	48	1.0
	1½	350	1,000	0 - 0.07	3.38	5.28	1.88	2.0
76.1	50	3450	9850	0 - 1.8	102	151	48	1.4
	2	500	2,215	0 - 0.07	4.00	5.93	1.88	3.1
80	50	2410	6900	0 - 1.8	111	168	48	2.1
	2	350	1,550	0 - 0.07	4.38	6.63	1.88	4.6
88.9	65	2410	6900	0 - 1.8	121	181	48	2.2
	2½	350	1,550	0 - 0.07	4.75	7.13	1.88	4.9
100	65	3450	14460	0 - 1.8	121	181	48	2.0
	2½	500	3,250	0 - 0.07	4.75	7.13	1.88	4.3
114.3	80	2410	10125	0 - 1.8	121	181	48	1.9
	3	350	2,275	0 - 0.07	4.75	7.13	1.88	4.2
125	80	2410	6900	0 - 3.2	159	226	57	3.7
	4	350	1,550	0 - 0.13	6.25	8.90	2.25	8.1
150	65	2410	10125	0 - 3.2	159	226	57	3.9
	2½	350	2,275	0 - 0.13	6.25	8.90	2.25	8.6
165.1	80	3450	21400	0 - 3.2	152	226	57	3.0
	3	500	4,810	0 - 0.13	6.00	8.90	2.25	6.7
200	80	2410	10125	0 - 3.2	159	226	57	3.1
	4	350	2,275	0 - 0.13	6.25	8.90	2.25	6.9
250	100	2410	24765	0 - 3.2	182	272	54	5.1
	4	350	5,565	0 - 0.13	7.18	10.70	2.13	11.2
300	100	2410	24765	0 - 3.2	219	302	57	7.6
	4	350	5,565	0 - 0.13	8.63	11.90	2.25	16.7
350	125	2410	37825	0 - 3.2	211	302	57	5.9
	5	350	8,500	0 - 0.13	8.31	11.90	2.25	12.9
400	100	2410	24765	0 - 3.2	219	302	57	6.9
	4	350	5,565	0 - 0.13	8.63	11.90	2.25	15.2
450	150	2410	53400	0 - 3.2	275	378	64	10.2
	6	350	12,000	0 - 0.13	10.81	14.88	2.50	22.4

\* Refer to General Notes on pg. 1-3.

#### IMPORTANT NOTES:

Style 750 reducing couplings should not be used with end caps (No. 60) in systems where a vacuum may be developed. Contact Victaulic for details.



TYPICAL FOR ALL SIZES



# Couplings

## Snap-Joint Coupling

### STYLE 78

For Complete Information  
Request Publication **06.09**




- Designed for quick disconnect service
- Mated housings are hinged with an attached locking handle for assembly
- Pressure rated up to 2065 kPa/300 psi
- Sizes from 25–200mm/1–8"

Size		Max. Work Pressure *	Max. End Load *	Allow. Pipe End Sep. *	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	kPa psi	N Lbs.	mm Inches	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
25 1	33.4 1.315	2065 300	1825 410	0 – 1.6 0 – 0.06	70 2.75	83 3.25	44 1.75	0.4 0.8
32 1¼	42.2 1.660	2065 300	2890 650	0 – 1.6 0 – 0.06	79 3.13	95 3.75	48 1.88	0.5 1.1
40 1½	48.3 1.900	2065 300	3780 850	0 – 1.6 0 – 0.06	89 3.50	114 4.50	48 1.88	0.8 1.7
50 2	60.3 2.375	2065 300	5920 1,330	0 – 1.6 0 – 0.06	102 4.00	121 4.75	48 1.88	0.8 1.7
65 2½	73.0 2.875	2065 300	8680 1,950	0 – 1.6 0 – 0.06	121 4.75	149 5.88	48 1.88	1.1 2.5
80 3	88.9 3.500	2065 300	12840 2,885	0 – 1.6 0 – 0.06	137 5.38	159 6.25	48 1.88	1.3 2.8
100 4	114.3 4.500	2065 300	21225 4,770	0 – 3.2 0 – 0.13	175 6.88	197 7.75	54 2.13	2.5 5.5
125 5	141.3 5.563	2065 300	32440 7,290	0 – 3.2 0 – 0.13	222 8.75	241 9.50	54 2.13	4.4 9.8
150 6	168.3 6.625	2065 300	46060 10,350	0 – 3.2 0 – 0.13	251 9.88	270 10.63	54 2.13	4.9 10.7
200 8	219.1 8.625	2065 300	77875 17,500	0 – 3.2 0 – 0.13	311 12.25	330 13.00	60 2.38	6.9 15.3

\* Refer to General Notes on pg. 1-3.

#### IMPORTANT NOTES:

Refer to Victaulic Pocket Handbook I-100 for special safety precautions when used for concrete pumping.



TYPICAL FOR ALL SIZES

# Couplings

## Outlet Coupling

### STYLE 72

For Complete Information  
Request Publication 06.10



- Serves dual purpose as a coupling and female threaded outlet
- Designed to seal on the joined pipe ends and in the neck of the outlet
- Pressure rated up to 3450 kPa/500 psi
- Sizes from 40×15mm/1½×½" through 150×50mm/6×2"

Size	Run × Reducing Outlet Nominal Size mm/Inches	Max. Work Pressure * kPa psi	Allow. Pipe End Sep. * mm Inches	Dimensions					Approx. Wgt. Each kg Lbs.
				T † mm Inches	V ‡ mm Inches	X mm Inches	Y mm Inches	Z mm Inches	
40 1½	× ½	3450	19 – 22	52	67	75	114	70	0.6
		500	0.75 – 0.88	2.06	2.63	2.94	4.50	2.75	1.4
	20 ¾	3450	19 – 22	52	67	75	114	70	0.6
		500	0.75 – 0.88	2.06	2.63	2.94	4.50	2.75	1.4
50 2	× ½	3450	19 – 22	49	67	75	114	70	0.6
		500	0.75 – 0.88	1.94	2.63	2.94	4.50	2.75	1.4
	20 ¾	3450	20 – 22	63	77	86	127	70	1.6
		500	0.81 – 0.88	2.47	3.03	3.38	5.00	2.75	3.5
65 2½	× ½	3450	20 – 22	65	79	98	152	70	2.0
		500	0.81 – 0.88	2.56	3.13	3.88	6.00	2.75	4.5
	20 ¾	3450	20 – 22	65	79	98	152	70	2.1
		500	0.81 – 0.88	2.56	3.13	3.88	6.00	2.75	4.6
80 3	× ½	3450	20 – 22	62	79	98	152	70	2.1
		500	0.81 – 0.88	2.44	3.13	3.88	6.00	2.75	4.6
	32 1¼	3450	32 – 38	76	94	103	175	83	2.3
		500	1.25 – 1.50	3.00	3.69	4.06	6.88	3.25	5.0
100 4	× ¾	3450	32 – 38	—	94	103	175	83	2.3
		500	1.25 – 1.50	—	3.69	4.06	6.88	3.25	5.0
	20 ¾	3450	13 – 16	70	84	114	178	60	1.5
		500	0.50 – 0.63	2.75	3.31	4.50	7.00	2.38	3.4
150 6	× 1	3450	32 – 38	103	121	121	203	83	3.2
		500	1.25 – 1.50	4.06	4.75	4.75	8.00	3.25	7.0
	32 1¼	3450	32 – 38	103	121	121	203	83	3.2
		500	1.25 – 1.50	4.06	4.75	4.75	8.00	3.25	7.0
150 6	× 1½	3450	32 – 38	—	108	121	203	83	3.2
		500	1.25 – 1.50	—	4.25	4.75	8.00	3.25	7.0
	20 ¾	3450	11 – 16	83	97	145	213	64	3.1
		500	0.44 – 0.63	3.25	3.81	5.69	8.38	2.50	6.8
150 6	× 2	3450	11 – 16	—	97	145	213	64	3.1
		500	0.44 – 0.63	—	3.81	5.69	8.38	2.50	6.8
	40 1½	2750	41 – 46	99	117	156	229	94	5.2
		400	1.63 – 1.81	3.91	4.59	6.13	9.00	3.69	11.4
150 6	× 2	2750	41 – 46	—	117	156	229	94	5.2
		400	1.63 – 1.81	—	4.59	6.13	9.00	3.69	11.4
	25 1	2750	41 – 46	157	175	206	305	94	8.2
		400	1.63 – 1.81	6.19	6.88	8.13	12.00	3.69	18.0
150 6	× 2	2750	41 – 46	157	175	206	305	94	8.2
		400	1.63 – 1.81	6.19	6.88	8.13	12.00	3.69	18.0
	50 2	2750	41 – 46	—	154	206	305	94	8.2
		400	1.63 – 1.81	—	6.06	8.13	12.00	3.69	18.0


\* Refer to General Notes on pg. 1-3.

‡ Center of run to end of fittings.

† Center of run to the engaged pipe end. Female threaded outlet only (dimensions approximate).

#### IMPORTANT NOTES:

No. 60 Cap is not for use in vacuum services with Style 72 or 750 couplings. No. 61 bull plug should be used.



TYPICAL FOR ALL SIZES

# Couplings

## Vic-Boltless Coupling

### STYLE 791 AND STYLE 792 ASSEMBLY TOOL

For Complete Information Request Publication **06.11**



- One-piece hinged coupling
- Features locking pin installation with a separate tool (Style 792) designed for assembly and disassembly
- Provides secure, tamper resistant, low profile joint
- Pressure rated up to 4825kPa/700psi
- Sizes from 50–200mm/2–8"


Size		Max. Work Pressure *	Max. End Load *	Allow. Pipe End Sep. *	Locking Pin Size	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	kPa psi	N Lbs.	mm Inches	Dia. x Length mm Inches	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
50 2	60.3 2.375	4825 700	13795 3,100	0 – 1.6 0 – 0.06	8 x 48 5/16 x 1 7/8	90 3.56	120 4.71	47 1.84	0.8 1.8
65 2 1/2	73.0 2.875	4825 700	20205 4,540	0 – 1.6 0 – 0.06	10 x 48 3/8 x 1 7/8	104 4.09	139 5.48	47 1.84	1.2 2.7
80 3	88.9 3.500	4825 700	29950 6,730	0 – 1.6 0 – 0.06	10 x 48 3/8 x 1 7/8	120 4.72	156 6.15	47 1.84	1.2 2.6
100 4	114.3 4.500	4825 700	49530 11,130	0 – 3.2 0 – 0.13	11 x 51 7/16 x 2	154 6.06	194 7.62	49 1.93	2.2 4.8
150 6	168.3 6.625	4135 600	92005 20,675	0 – 3.2 0 – 0.13	13 x 52 1/2 x 2 1/16	209 8.24	259 10.18	51 2.06	2.9 6.3
200 8	219.1 8.625	3450 500	129940 29,200	0 – 3.2 0 – 0.13	13 x 59 1/2 x 2 5/16	267 10.52	318 12.50	59 2.31	5.4 12.0

\* Refer to General Notes on pg. 1-3.

#### IMPORTANT NOTES:

Complete coupling includes one-piece hinged housing, gasket and locking pin only. Assembly tool Style 792 is required for assembly (one tool fits all size couplings).

Please see Publication 06.11 for tool clearance dimensions.

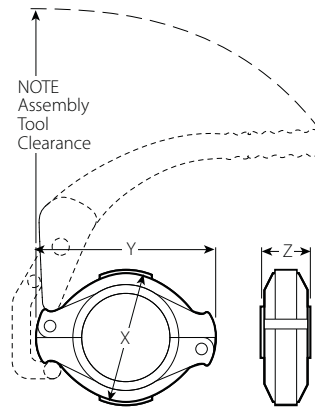


TYPICAL FOR ALL SIZES

# Couplings

## High Pressure Coupling

### STYLE 808

For Complete Information Request Publication 15.01.



Typical for all sizes

- Style 808 provides superior joint integrity at high pressures while maintaining a degree of flexibility to facilitate joining.
- Couplings engage directly into double grooved pipe without the need for special weld-on nipples or collars.
- Available for 150-300mm/6-12"
- Pressure rated up to 27586kPa/ 4000psi

### DIMENSIONS

Pipe Size		Dimensions – mm/Inches			Bolt/Nut		Min. Bolt Torque @	Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Diameter mm Inches	X	Y	Z	No.	Diameter X Length	N•m Lb. Ft.	kg Lbs.
150 6	168.3 6.625	222 8.75	351 13.81	127 5.00	4	1 x 5	610 450	16.3 36.0
200 8	219.1 8.625	284 11.18	408 16.08	146 5.75	4	1½ x 6	678 500	31.8 70.0
250 10	273.0 10.750	341 13.44	473 18.68	162 6.38	4	1½ x 6	678 500	38.6 85.0
300 12*	323.9 12.750	—	—	—	—	—	—	—

@ To achieve adequate tension on the bolts this is the minimum torque which must be applied.

\*Available as special order item. Please contact Victaulic Engineered Products.

### PERFORMANCE DATA

1		2		3	4	5	6	7	8	9
Pipe Size		Nominal Steel Pipe Dimension mm Inches			A Max. Joint Work. Press.	Max. Permiss. End Load	B, C Pipe End Sep. Standard Gasket Min. – Max.	B, C Pipe End Sep. "ES" Gasket Min. – Max.	B, C Max. Deflection From Center Line	
Nominal Size mm Inches	Actual Outside Diameter mm Inches	Wall Thick.	Sched. No.	kPa psi	N Lbs.	mm Inches	mm Inches	Degrees Per Cplg.	Pipe In./Ft. mm/m	
150 6	168.3 6.625	11.0 0.432	80	20690 3000	459968 103.410	6.6 – 11.1 0.258 – 0.438	7.6 – 12.1 0.298 – 0.478	1° – 33'	29.2 0.35	
150 6	168.3 6.625	18.3 0.719	160	27586 4000	613290 137.880	6.6 – 11.1 0.258 – 0.438	7.6 – 12.1 0.298 – 0.478		29.2 0.35	
200 8	219.1 8.625	12.7 0.500	80	17241 2500	649675 146.060	4.8 – 11.1 0.188 – 0.438	6.6 – 13.0 0.260 – 0.510	1° – 39'	29.2 0.35	
200 8	219.1 8.625	23.0 0.906	160	24138 3500	909572 204.490	4.8 – 11.1 0.188 – 0.438	6.6 – 13.0 0.260 – 0.510		29.2 0.35	
250 10	273.0 10.750	15.1 0.593	80	17241 2500	1009251 226.900	4.8 – 11.1 0.188 – 0.438	6.6 – 13.0 0.260 – 0.510	1° – 20'	23.3 0.28	
250 10	273.0 10.750	28.6 1.125	160	20690 3000	1211101 272.280	4.8 – 11.1 0.188 – 0.438	6.6 – 13.0 0.260 – 0.510		23.3 0.28	
300 12	323.9 12.750	17.5 0.688	80	13793 2000	1135797 255.350	4.8 – 11.1 0.188 – 0.438	6.6 – 13.0 0.260 – 0.510	1° – 07"	20.0 0.24	
300 12	323.9 12.750	33.3 1.312	160	17241 2500	1419757 319.190	4.8 – 11.1 0.188 – 0.438	6.6 – 13.0 0.260 – 0.510		20.0 0.24	

**COLUMN 1** – Victaulic couplings are identified by nominal pipe size.

**COLUMN 2** – Nominal pipe wall thickness. For data with other wall thicknesses contact Victaulic.

**COLUMN 3** – Pipe wall thickness schedule as established by ANSI Standard B36.10.

**COLUMN 4** – Maximum line pressure, including surge, to which a joint should be subjected. This figure provides a nominal safety factor of 3. Working pressure ratings are based on pipe prepared in accordance with Victaulic double cut groove specifications. Maximum allowable working pressures for other pipe schedules or grades must be determined by applicable code requirements.

**NOTE A: ONE TIME FIELD TEST ONLY.** The Maximum Joint Working Pressure may be increased to 1½ times the figures shown.

**COLUMN 5** – Maximum end load from all internal and/or external forces to which the joint should be subjected under working conditions.

**COLUMNS 6 & 7** – Range of pipe end separation normally available on double cut grooved steel pipe. Maximum allowable movement is the difference between minimum and maximum pipe end separation subject to tolerances (see Design Data).

**COLUMNS 8 & 9** – Maximum allowable deflection of pipe from centerline, subject to tolerances (see Design Data). See Note B.

**NOTE B:** Maximum Pipe Movement will be reduced by Deflection (Col. 8 & 9) and vice versa.

**NOTE C:** Refer to Design Data for information on tolerances and pipe gap settings.

# Couplings

## Rigid Coupling

### STYLE HP-70

For Complete Information  
Request Publication **06.12**




- Designed with heavy housing for high pressure services
- Housing key is wider than standard
- Coupling housing is designed to clamp the bottom of the groove
- Essentially rigid joint
- Pressure rated up to 6900kPa/1000psi
- Sizes from 50–400mm/2–16"

Size		Max. Work Pressure *	Max. End Load *	Fixed Pipe End Sep. *	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	kPa psi	N Lbs.	mm Inches	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
50 2	60.3 2.375	6900 1000	19715 4,430	3.6 0.14	89 3.50	168 6.68	51 2.00	1.5 3.2
65 2½	73.0 2.875	6900 1000	28881 6,490	3.6 0.14	105 4.13	181 7.13	51 2.00	1.8 4.0
80 3	88.9 3.500	6900 1000	42810 9,620	3.6 0.14	121 4.75	197 7.75	51 2.00	2.0 4.4
100 4	114.3 4.500	6900 1000	70755 15,900	6.4 0.25	152 6.00	245 9.63	54 2.13	3.4 7.5
150 6	168.3 6.625	6900 1000	153390 34,470	6.4 0.25	219 8.63	321 12.68	64 2.50	7.3 16.0
200 8	219.1 8.625	5500 800	207995 46,740	6.4 0.25	279 11.00	381 15.00	70 2.75	11.8 26.1
250 10	273.0 10.750	5500 800	323250 72,640	6.4 0.25	343 13.50	438 17.25	76 3.00	14.9 32.8
300 12	323.9 12.750	5500 800	453900 102,000	6.4 0.25	397 15.63	486 19.13	80 3.13	20.9 46.0
350 14 #	355.6 14.000	4100 600	410800 92,360	6.4 0.25	425 16.75	559 22.00	99 3.88	29.0 64.0
400 16 #	406.4 16.000	4100 600	536400 120,600	6.4 0.25	476 18.75	613 24.13	99 3.88	32.7 72.0

# These sizes are not intended for use on AGS roll groove pipe.

\* Refer to General Notes on pg. 1-3.

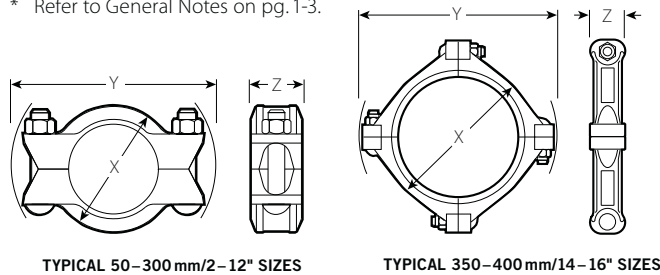

# Couplings

## Endseal Coupling for Plastic Coated Pipe

### STYLE HP-70ES

For Complete Information  
Request Publication **06.13**



Size		Max. Work Pressure †	Max. End Load *	Fixed Pipe End Sep. *	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	kPa psi	N Lbs.	mm Inches	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
50 2	60.3 2.375	17250 2500	48950 11,000	4.8 0.19	87 3.44	765 6.51	48 1.88	1.5 3.2
65 2½	73.0 2.875	17250 2500	72090 16,200	4.8 0.19	102 4.00	180 7.10	48 1.88	1.8 4.0
80 3	88.9 3.500	17250 2500	113030 25,400	4.8 0.19	119 4.69	197 7.74	48 1.88	2.1 4.6
100 4	114.3 4.500	17250 2500	173550 39,000	4.8 0.19	151 5.94	242 9.54	54 2.13	3.7 8.2
150 6	168.3 6.625	13800 2000	306160 68,800	6.7 0.27	216 8.50	320 12.61	60 2.38	7.4 16.4
200 8	219.1 8.625	10350 1500	389375 87,500	6.7 0.27	278 10.94	380 14.97	70 2.75	11.8 26.0
250 10	273.0 10.750	8600 1250	509525 114,500	7.1 0.28	682 13.43	437 17.22	73 2.88	16.9 37.2
300 12	323.9 12.750	8600 1250	715560 160,800	7.1 0.28	395 15.56	484 19.06	76 3.00	19.1 42.0


† Warning: For one time field test only, the Maximum Joint Working Pressure may be increased to 1¼ the figure shown.

\* Refer to General Notes on pg. 1-3.

#### IMPORTANT NOTES:

HP-70ES couplings must always be used with pipe or fittings grooved to Victaulic "ES" dimensions.  
HP-70ES couplings cannot be used with Victaulic Series 700 butterfly valves.

- Specially formulated and compounded oil-resistant nitrile gasket
- ES gasket design has integral central leg that positions between the pipe ends for use with plastic-coated or cement-lined pipe
- Designed for higher pressure systems rated up to 17250kPa/2500psi
- Sizes from 50–300mm/2–12"




TYPICAL FOR ALL SIZES

# Couplings

## EndSeal Fittings for Plastic Coated Pipe

- NO. 62-ES** 90° Elbow
- NO. 63-ES** 45° Elbow
- NO. 64-ES** Tee
- NO. 35-ES** Cross
- NO. 22-ES** Header Tee

For Complete Information  
Request Publication **07.03**

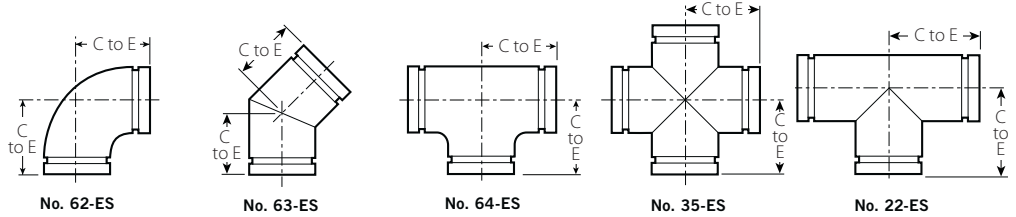

- Extra heavy wall thickness – Schedule 80
- “ES” EndSeal grooves for use with HP-70ES couplings only
- Special header tees for oil production headers designed with top (test) line is 50mm/2" and bottom production line is 80mm/3" or 100mm/4"
- Sizes from 50–150mm/2–6"

Size		No. 62-ES 90° Elbow		No. 63-ES* 45° Elbow		No. 64-ES* Tee		No. 35-ES* Cross		No. 22-ES Header Tee	
Nominal Size mm Inches	Actual Outside Diameter mm Inches	C to E mm Inches	Approx. Weight Each kg Lbs.	C to E mm Inches	Approx. Weight Each kg Lbs.	C to E mm Inches	Approx. Weight Each kg Lbs.	C to E mm Inches	Approx. Weight Each kg Lbs.	C to E mm Inches	Approx. Weight Each kg Lbs.
50 2	60.3 2.375	83 3.25	1.1 2.5	51 2.00	0.8 1.8	83 3.25	1.9 4.2	83 3.25	1.8 3.9	—	—
65 2½	73.0 2.875	95 3.75	2.3 5.0	57 2.25	1.3 2.9	95 3.75	3.6 7.9	95 3.75	3.0 6.6	—	—
50 – 90 2 – 3	60.3 – 88.9 2.375 – 3.500	—	—	—	—	—	—	—	—	108 4.25	1.5 3.4
50 – 100 2 – 4	60.3 – 114.3 2.375 – 4.500	—	—	—	—	—	—	—	—	127 5.00	1.9 4.1
80 3	88.9 3.500	108 4.25	2.7 6.0	64 2.50	1.9 4.3	108 4.25	7.3 16.0	108 4.25	6.4 14.2	—	—
100 4	114.3 4.500	127 5.00	4.7 10.3	76 3.00	3.9 8.5	127 5.00	10.7 23.5	127 5.00	7.2 15.8	—	—
150 6†	168.3 6.625	165 6.50	12.3 27.2	89 3.50	7.5 16.5	165 6.50	12.2 27.0	165 6.50	20.9 46.0	—	—

\* Steel Fabricated - Cast Full Flow.

† For sizes to 300mm/12" consult Victaulic.

### IMPORTANT NOTES:

Steel Full Flow elbows available with longer center to end dimensions. Contact Victaulic for details.

# Fittings

- Fittings available in sizes through 1200mm/48"
- Standard fitting pressure ratings conform to ratings of installed coupling
- All fittings supplied with grooves or shoulders for fast installation
- Groove design permits flexibility for easy alignment (these fittings are not intended for use with Victaulic couplings for plain end pipe – refer to Publication 14.04 for fittings available for plain end pipe)
- Painted orange enamel with optional galvanized finish
- When connecting wafer or lug-type butterfly valves directly to Victaulic fittings with Style 741 or 743 Vic-Flange adapters, check disk clearance dimensions with I.D. dimension of fitting
- Request Publication 07.01

## Advanced Groove System **AGS™**




For 350–600mm/14–24" piping systems  
Victaulic offers Advanced Groove System (AGS) fittings, see pg. 5-1.


### Elbows



90° Elbow  
**NO. 10, PG. 2-3**  
**AGS NO. W10, PG. 5-8**



90° 1½ D Long Radius Elbow  
**NO. 100, PG. 2-3**  
**AGS NO. W100, PG. 5-8**



90° 3 D Long Radius Elbow  
**NO. 100-3D, PG. 2-5**




45° Elbow  
**NO. 11, PG. 2-3**  
**AGS NO. W11, PG. 5-8**




45° 1½ D Long Radius Elbow  
**NO. 110, PG. 2-3**  
**AGS NO. W110, PG. 5-8**




45° 3 D Long Radius Elbow  
**NO. 110-3D, PG. 2-5**



22½° Elbow  
**NO. 12, PG. 2-3**  
**AGS NO. W12, PG. 5-8**




Reducing Base Support Elbow  
Grv. × Grv.  
**NO. R-10G, PG. 2-5**



90° Adapter Elbow  
**NO.18, PG. 2-6**




11¼° Elbow  
**NO. 13, PG. 2-3**  
**AGS NO. W13, PG. 5-8**



Reducing Base Support Elbow  
Grv. × Flange  
**NO. R-10F, PG. 2-5**




45° Adapter Elbow  
**NO. 19, PG. 2-6**




Drain Elbow  
**NO. 10-DR, PG. 2-4**


### Tees, Crosses, Wyes, and Laterals




Tee  
**NO. 20, PG. 2-7**  
**AGS NO. W20, PG. 5-8**




Cross  
**NO. 35, PG. 2-7**  
**AGS NO. W35, PG. 5-8**




True Wye  
**NO. 33, PG. 2-7**  
**AGS NO. W33, PG. 5-8**



Tees with Threaded Branch  
**NO. 29M, PG. 2-7**




Reducing Tee  
**NO. 25, PG. 2-8**  
**AGS NO. W25, PG. 5-9**




Reducing Tee with Threaded Branch  
**NO. 29, PG. 2-8**




Standpipe Tee  
**NO. 27, PG. 2-9**




45° Lateral  
**NO. 30, PG. 2-10**  
**AGS NO. W30, PG. 5-10**




45° Reducing Lateral  
**NO. 30-R, PG. 2-10**  
**AGS NO. W30-R, PG. 5-10**



Bullhead Tee  
**NO. 21, PG. 2-9**



Tee Wye  
**NO. 32, PG. 2-11**



Reducing Tee Wye  
**NO. 32-R, PG. 2-11**




# Fittings

## Alternate Style Fittings Machined for Rubber or Urethane Lining

- For severe abrasive services
- Fitting may be rubber or urethane lined
- Refer to Publication 25.03 for specific details



FOR ABRASION RESISTANCE ONLY



FOR CORROSION AND/OR ABRASION RESISTANCE

### Adapters, Nipples, Caps, and Plugs



Adapter Nipple  
Grv. x Thd.  
**NO. 40, PG. 2-12**



Adapter Nipple  
Grv. x Bev.  
**NO. 42, PG. 2-12**  
**AGS NO. W42, PG. 5-11**



Adapter Nipple  
Grv. x Grv.  
**NO. 43, PG. 2-12**  
**AGS NO. W43, PG. 5-11**  
**AGS NO. W49, PG. 5-11**



Concentric  
Reducer  
**NO. 50, PG. 2-16**  
**AGS NO. W50, PG. 5-12**



Flat Face Flanged  
Adapter Nipple  
**NO. 41, NO. 45F,**  
**NO. 46F, PG. 2-13**



Raised Face Flanged  
Adapter Nipple  
**NO. 45R, NO. 46R,**  
**PG. 2-13**  
**AGS NO. W45R, PG. 5-11**



Female Threaded  
Adapter  
**NO. 80, PG. 2-15**



Eccentric  
Reducer  
**NO. 51, PG. 2-16**  
**AGS NO. W51, PG. 5-12**



Swaged Nipple  
Grv. x Grv.  
**NO. 53, PG. 2-14**



Swaged Nipple  
Grv. x Thd.  
**NO. 54, PG. 2-14**



Swaged Nipple  
Thd. x Grv.  
**NO. 55, PG. 2-14**



Small Threaded  
Reducer  
**NO. 52, PG. 2-18**  
**NO. 52F, PG. 2-18**



Bull Plug  
**NO. 61, PG. 2-9**



Cap  
**NO. 60, PG. 2-12**  
**AGS NO. W60, PG. 5-11**



Hose Nipple  
**NO. 48, PG. 2-15**

### Reducers



### PRODUCTS


- 1-12 Couplings
- 2-1 Fittings**
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software

# Fittings

## Elbows

- NO. 10** 90° Elbow
- NO. 11** 45° Elbow
- NO. 12** 22½° Elbow
- NO. 13** 11¼° Elbow
- NO. 100** 90° LR Elbow
- NO. 110** 45° LR Elbow  
(Ductile Iron#)

For Complete Information  
Request Publication **07.01**

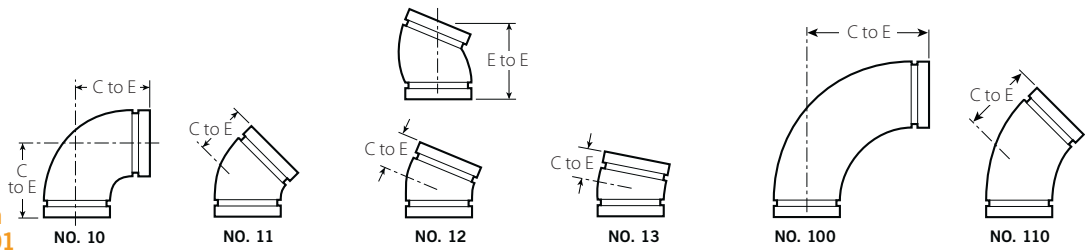

Size		No. 10 90° Elbow		No. 11 45° Elbow		No. 12 22½° Elbow		No. 13 11¼° Elbow		No. 100 (1½ D) 90° Long Radius Elbow		No. 110 (1½ D) 45° Long Radius Elbow	
Nominal Size mm Inches	Actual Outside Dia. mm Inches	C to E mm Inches	Approx. Wgt. Each kg Lbs.	C to E mm Inches	Approx. Wgt. Each kg Lbs.	C to E mm Inches	Approx. Wgt. Each kg Lbs.	C to E mm Inches	Approx. Wgt. Each kg Lbs.	C to E mm Inches	Approx. Wgt. Each kg Lbs.	C to E mm Inches	Approx. Wgt. Each kg Lbs.
20 ¾	26.9 1.050	57 2.25	0.2 0.5	38 1.50	0.2 0.5	41 1.63 (sw)	—	35 1.38 (sw)	—	—	—	—	—
25 1	33.7 1.315	57 2.25	0.3 0.6	44 1.75	0.3 0.6	83 3.25 @	0.3 0.6	35 1.38 (sw)	0.1 0.3	—	—	—	—
32 1¼	42.4 1.660	70 2.75	0.5 1.0	44 1.75	0.4 0.9	44 1.75	0.4 0.8	35 1.38 (sw)	0.2 0.5	—	—	—	—
40 1½	48.3 1.900	70 2.75	0.5 1.2	44 1.75	0.4 0.9	44 1.75	0.4 0.8	35 1.38 (sw)	0.2 0.5	—	—	—	—
50 2	60.3 2.375	83 3.25	0.8 1.8	51 2.00	0.6 1.3	95 3.75 @	0.6 1.4	35 1.38	0.5 1.0	111 4.38	1.1 2.5	70 2.75	0.8 1.8
65 2½	73.0 2.875	95 3.75	1.5 3.2	57 2.25	1.0 2.2	102 4.00 @	1.0 2.3	38 1.50	0.5 1.1	130 5.13	1.9 4.1	76 3.00	1.3 2.8
76.1 mm	76.1 3.000	95 3.75	1.7 3.7	57 2.25	1.5 3.4	57 2.24	—	38 1.50	—	—	—	—	—
80 3	88.9 3.500	108 4.25	2.0 4.5	64 2.50	1.4 3.1	114 4.50 @	1.4 3.1	38 1.50	1.0 2.1	149 5.88	2.7 6.0	86 3.38	2.2 4.9
90 3½	101.6 4.000	114 4.50	2.5 5.6	70 2.75	2.0 4.3	64 2.50 (sw)	1.8 4.0	44 1.75 (sw)	1.2 2.7	—	—	—	—
108.0 mm	108.0 4.250	127 5.00	5.0 11.0	76 3.00	2.5 5.6	—	—	—	—	—	—	—	—
100 4	114.3 4.500	127 5.00	3.2 7.1	76 3.00	2.5 5.6	73 2.88	2.5 5.6	44 1.75	1.6 3.6	191 7.50	5.6 12.3	102 4.00	3.3 7.3
120 4½	127.0 5.000	133 5.25 (sw)	4.5 10.0	79 3.13 (sw)	2.7 6.0	89 3.50	3.0 6.6	48 1.88 (sw)	1.9 4.2	—	—	—	—
133.0 mm	133.0 5.250	140 5.50	5.3 11.7	83 3.25	3.8 8.3	—	—	—	—	—	—	—	—
139.7 mm	139.7 5.500	140 5.50	5.3 11.7	83 3.25	3.8 8.3	72 2.87	—	51 2.00	—	—	—	—	—
125 5	141.3 5.563	140 5.50	5.3 11.7	83 3.25	3.8 8.3	73 2.88 (sw)	3.5 7.8	51 2.00 (sw)	2.2 5.0	+	8.3 18.2	+	6.7 14.8
159.0 mm	159.0 6.250	165 6.50	8.4 18.6	89 3.50	4.9 10.8	—	—	—	—	—	—	—	—
165.1 mm	165.1 6.500	165 6.50	7.0 15.5	89 3.50	4.4 9.8	79 3.13	5.2 11.4	51 2.00	3.4 7.4	273 10.75	13.2 29.0	140 5.50	8.6 19.0
150 6	168.3 6.625	165 6.50	7.8 17.2	89 3.50	4.9 10.8	159 6.25 @	5.5 12.2	51 2.00	3.2 7.0	273 10.75	13.8 30.4	140 5.50	7.9 17.4
200 8	219.1 8.625	197 7.75	13.6 29.9	108 4.25	9.3 20.4	197 7.75 @	9.1 20.0	51 2.00	4.6 10.1	362 14.25	30.0 66.0	184 7.25	16.3 36.0
250 10	273.0 10.750	229 9.00	28.7 63.3	121 4.75	17.0 37.5	111 4.38 (sw)	13.6 30.0	54 2.13 (sw)	5.3 11.8	381 15.00	48.5 107.0	159 6.25	25.9 57.0
300 12	323.9 12.750	254 10.00	33.6 74.0	133 5.25	30.3 66.7	124 4.88 (sw)	18.1 40.0	57 2.25 (sw)	13.3 29.3	457 18.00	70.8 156.0	191 7.50	40.8 90.0
350 – 600 14 – 24	<b>AGS™</b> See AGS Roll Groove Fittings, pg. 5-2; for 350–600mm/14–24" Cut Groove Systems Request Publication 07.01												

@ Gooseneck design, end-to-end dimension.

+ Contact Victaulic for details.


# Ductile iron except those marked (sw) which are segmentally welded steel.

# Fittings

## No. 10-DR Drain Elbow

**No. 10-DR** Drain Elbow  
(Ductile Iron)

For Complete Information  
Request Publication **10.05**



Size		Dimensions mm/inches		
Nominal Size mm Inches	Actual Outside Dia. mm Inches	C to E	H	P
65 2½	73.0 2.875	95.3 3.75	69.9 2.75	42.7 1.68
80 3	88.9 3.500	108.0 4.25	69.9 2.75	53.3 2.10
100 4	114.3 4.500	127.0 5.00	69.9 2.75	66.0 2.60
150 6	168.3 6.625	165.1 6.50	69.9 2.75	89 3.65

**NOTE:** The drain is drilled and tapped for a 25-mm/1-inch NPT outlet.

# Fittings



## Long Radius Elbow 3D

With added wall thickness at bend for abrasive services.

**NO. 100-3D** 90° Long Radius Elbow 3D

**NO. 110-3D** 45° Long Radius Elbow 3D (Ductile Iron)

For Complete Information Request Publication **07.01**





Size		Wall Thickness			No. 100-3D 90° Long Radius Elbow		No. 110-3D 45° Long Radius Elbow	
Nominal Size mm Inches	Actual Outside Diameter mm Inches	In Non-critical Area mm Inches	At Back Wear Area mm Inches	Extra mm Inches	C to E mm Inches	Approx. Weight Each kg Lbs.	C to E mm Inches	Approx. Weight Each kg Lbs.
50 2	60.3 2.375	4.67 0.184	7.85 0.309	3.18 0.125	254 10.00	2.3 5.0	165 6.50	2.1 4.7
80 3	88.9 3.500	6.25 0.246	9.42 0.371	3.18 0.125	330 13.00	7.3 16.0	197 7.75	4.7 10.4
100 4	114.3 4.500	6.78 0.267	11.56 0.455	4.78 0.188	406 16.00	11.6 25.5	229 9.00	7.8 17.2
150 6	168.3 6.625	7.87 0.310	14.22 0.560	6.35 0.250	610 24.00	31.8 70.0	343 13.50	20.4 45.0

## Reducing Base Support Elbow

**NO. R-10G** Grv. × Grv.

**NO. R-10F** Grv. × Flange (Ductile Iron)

For Complete Information Request Publication **07.01**




Size		No. R-10 Reducing Base Support Elbow			Approx. Weight Each	
Nominal Size mm Inches		C to E mm Inches	H mm Inches	B Diameter mm Inches	Grv. × Grv. kg Lbs.	Grv. × Flange kg Lbs.
150 6	100 4	229 9.00	32 1.25	38 1.50	8.6 19.0	15.0 33.0
	125 5	229 9.00	38 1.50	38 1.50	10.4 23.0	17.2 38.0
200 8	150 6	267 10.50	54 2.13	38 1.50	15.0 33.0	23.6 52.0
250 10	200 8	305 12.00	61 2.40	38 1.50	27.7 61.0	39.9 88.0

# Fittings


## Adapter Elbow

**NO. 18** 90° Adapter Elbow  
**NO. 19** 45° Adapter Elbow  
 (Ductile Iron)

For Complete Information  
 Request Publication **07.01**



**NO. 18**



**NO. 19**

Size		No. 18 90° Adapter Elbow @			No. 19 45° Adapter Elbow @		
Nominal Size mm Inches	Actual Outside Diameter mm Inches	C to GE mm Inches	C to TE mm Inches	Approx. Weight Each kg Lbs.	C to GE mm Inches	C to TE mm Inches	Approx. Weight Each kg Lbs.
20 ¾	26.9 1.050	57 2.25	57 2.25	0.2 0.5	38 1.50	38 1.50	0.2 0.5
25 1	33.7 1.315	57 2.25	57 2.25	0.2 0.5	–	–	–
32 1¼	42.4 1.660	70 2.75	70 2.75	0.4 0.9	–	–	–
40 1½	48.3 1.900	70 2.75	70 2.75	0.5 1.1	44 1.75	44 1.75	0.4 0.9
50 2	60.3 2.375	83 3.25	108 4.25	1.1 2.5	–	–	–
65 2½	73.0 2.875	95 3.75	95 3.75	1.4 3.0	57 2.25	57 2.25	1.0 2.3
80 3	88.9 3.500	108 4.25	152 6.00	2.6 5.8	64 2.50	108 4.25	2.3 5.0
90 3½	101.6 4.000	114 4.50	159 6.25	3.6 8.0	133 5.25	133 5.25	4.0 8.8
150 6	168.3 6.625	165 6.50	165 6.50	8.0 17.6	89 3.50	89 3.50	5.8 12.7

@ Available with British Standard Pipe Threads, specify "BSP" clearly on order.

**IMPORTANT NOTES:**

Sizes shown are nominal DN sizes, except where actual mm sizes are shown.

# Fittings

## Tees, Crosses and True Wyes


**NO. 20** Tee

**NO. 35** Cross

**NO. 33** True Wye

**NO. 29M** Tee with  
Threaded Branch  
(Ductile Iron#)

For Complete Information  
Request Publication **07.01**

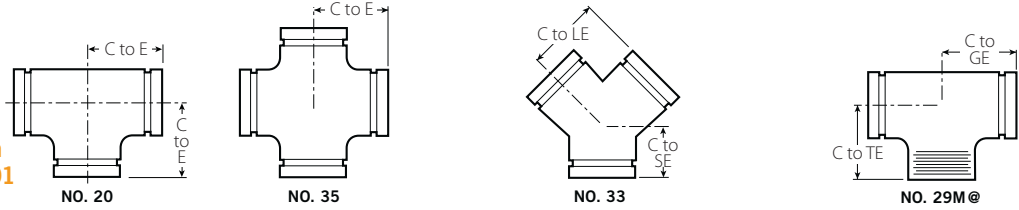

Size		No. 20 Tee		No. 35 Cross (sw)		No. 33 True Wye (sw)			No. 29M Tee with Threaded Branch		
Nominal Size mm Inches	Actual Outside Dia. mm Inches	C to E mm Inches	Approx. Weight Each kg Lbs.	C to E mm Inches	Approx. Weight Each kg Lbs.	C to LE mm Inches	C to SE mm Inches	Approx. Weight Each kg Lbs.	C to GE mm Inches	C to TE mm Inches	Approx. Weight Each kg Lbs.
20 ¾	26.9 1.050	57 2.25	0.3 0.6	57 2.25	0.4 0.9	—	—	—	57 2.25	57 2.25	0.3 0.6
25 1	33.7 1.315	57 2.25	0.5 1.0	57 2.25	0.6 1.3	57 2.25	57 2.25	0.5 1.1	57 2.25	57 2.25	0.5 1.0
32 1¼	42.4 1.660	70 2.75	0.7 1.5	70 2.75	1.0 2.1	70 2.75	64 2.50	0.7 1.5	—	—	—
40 1½	48.3 1.900	70 2.75	0.9 2.0	70 2.75	1.1 2.5	70 2.75	70 2.75	0.8 1.8	70 2.75	70 2.75	0.9 2.0
50 2	60.3 2.375	83 3.25	1.4 3.0	83 3.25	1.7 3.8	83 3.25	70 2.75	1.1 2.5	83 3.25	108 4.25	1.4 3.00
65 2½	73.0 2.875	95 3.75	2.0 4.3	95 3.75	2.8 6.1	95 3.75	76 3.00	2.0 4.3	—	—	—
76.1 mm	76.1 3.000	95 3.75	2.4 5.2	—	—	—	—	—	95 3.75 (sw)	95 3.75	2.4 5.2
80 3	88.9 3.500	108 4.25	3.0 6.8	108 4.25	4.8 10.5	108 4.25	83 3.25	2.8 6.1	—	—	—
90 3½	101.6 4.000	114 4.50 (sw)	3.6 7.9	114 4.50	5.2 11.5	114 4.50	89 3.50	4.4 9.6	114 4.50 (sw)	114 4.50	3.6 7.9
108.0 mm	108.0 4.250	127 5.00	7.0 15.5	—	—	—	—	—	127 5.00	127 5.00	7.0 15.5
100 4	114.3 4.500	127 5.00	5.4 11.9	127 5.00	7.2 15.8	127 5.00	95 3.75	4.5 10.0	127 5.00	184 7.25	5.4 11.9
120 4½	127.0 5.000	133 5.25 (sw)	6.8 15.0	133 5.25	8.4 18.5	—	—	—	133 5.25 (sw)	133 5.25	6.8 15.0
133.0 mm	133.0 5.250	140 5.50	8.1 17.8	—	—	—	—	—	140 5.50	140 5.50	8.1 17.8
139.7 mm	139.7 5.500	140 5.50	8.1 17.8	—	—	—	—	—	140 5.50	140 5.50	8.1 17.8
125 5	141.3 5.563	140 5.50	8.1 17.8	140 5.50	9.1 20.0	140 5.50	102 4.00	6.8 15.0	140 5.50 (sw)	140 5.50	8.1 17.8
159.0 mm	159.0 6.250	165 6.50	12.3 27.1	—	—	—	—	—	165 6.50	165 6.50	12.3 27.1
165.1 mm	165.1 6.500	165 6.50	10.0 22.0	165 6.50	12.7 28.0	—	—	—	165 6.50	165 6.50	10.0 22.0
150 6	168.3 6.625	165 6.50	11.7 25.7	165 6.50	12.7 28.0	165 6.50	114 4.50	10.1 22.3	165 6.50 (sw)	165 6.50	11.7 25.7
200 8	219.1 8.625	197 7.75	21.6 47.6	197 7.75	21.8 48.0	197 7.75	152 6.00	16.3 36.0	197 7.75 (sw)	197 7.75	21.6 47.6
250 10	273.0 10.750	229 9.00	44.9 99.0	229 9.00	55.1 121.5	229 9.00	155 6.50	31.7 69.9	229 9.00	229 9.00	33.1 73.0
300 12	323.9 12.750	254 10.00	60.3 133.0	254 10.00	49.9 110.0	254 10.00	178 7.00	36.3 80.0	254 10.00	254 10.00	44.9 99.0
350 – 600 14 – 24	<b>AGS™</b> See AGS Roll Groove Fittings, pg. 5-2; for 350–600mm/14–24" Cut Groove Systems Request Publication 07.01										

# Ductile iron except those marked (sw) which are segmentally welded steel.

@ Available with British Standard Pipe Threads, specify "BSP" clearly on order.

### IMPORTANT NOTES:

Fittings size 650–1050mm/26–48" are available roll grooved for installation with Style 770 large diameter pipe couplings, contact Victaulic for details.


Sizes shown are nominal DN sizes, except where actual mm sizes are shown.

# Fittings

## Reducing Tee

**NO. 25** Grooved Branch  
**NO. 29** Threaded Branch  
 (Ductile Iron#)

For Complete Information  
 Request Publication **07.01**

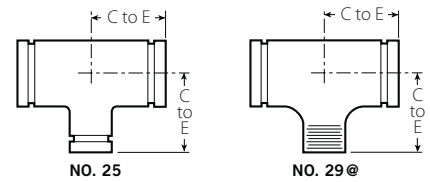

Size	No. 25 Std.	No. 29 w/ Thd. Branch	Approx. Weight Each	
Nominal Size mm Inches	C to E mm Inches	C to E mm Inches	kg Lbs.	
25 1 × 25 1 × 20 3/4	+	+	0.5 1.0	
32 1 1/4 × 32 1 1/4 × 25 1	+	+	0.6 1.3	
40 1 1/2 × 40 1 1/2 × 20 3/4	+	+	0.7 1.5	
	25 1	+	0.7 1.5	
	32 1 1/4	+	0.8 1.7	
50 2 × 50 2 × 20 3/4	83 3.25	83 3.25	1.1 2.5	
	25 1	83 3.25	1.2 2.7	
	32 1 1/4	+	0.8 1.8	
	40 1 1/2	83 3.25 (sw)	1.4 3.0	
65 2 1/2 × 65 2 1/2 × 20 3/4	+	+	1.8 3.9	
	25 1	95 3.75 (sw)	1.7 3.8	
	32 1 1/4	+	1.7 4.2	
	40 1 1/2	95 3.75	1.8 3.9	
	50 2	95 3.75 (sw)	2.0 4.5	
	80 3 × 80 3 × 20 3/4	+	+	2.6 5.7
25 1	108 4.25	108 4.25	2.8 6.1	
	32 1 1/4	+	3.6 8.0	
	40 1 1/2	108 4.25 (sw)	2.9 6.5	
	50 2	108 4.25 (sw)	2.8 6.2	
	65 2 1/2	108 4.25 (sw)	2.9 6.4	
	100 4 × 100 4 × 20 3/4	+	+	3.6 8.0
	25 1	127 5.00	127 5.00	3.5 7.8
32 1 1/4	+	+	4.4 9.6	
40 1 1/2	127 5.00	127 5.00	4.6 10.2	
50 2	127 5.00	127 5.00	5.1 11.2	
65 2 1/2	127 5.00	127 5.00	5.2 11.4	
80 3	127 5.00	127 5.00	5.3 11.6	

Size	No. 25 Std.	No. 29 w/ Thd. Branch	Approx. Weight Each	
Nominal Size mm Inches	C to E mm Inches	C to E mm Inches	kg Lbs.	
125 5 × 125 5 × 25 1	+	+	6.4 14.0	
	40 1 1/2	+	6.5 14.3	
	50 2	140 5.50 (sw)	140 5.50 (sw)	6.6 14.5
	65 2 1/2	140 5.50	140 5.50 (sw)	6.9 15.2
	80 3	140 5.50	140 5.50 (sw)	7.5 16.6
	100 4	140 5.50	140 5.50 (sw)	7.6 16.7
150 6 × 150 6 × 25 1	+	+	10.4 23.0	
	40 1 1/2	+	10.9 24.0	
	50 2	165 6.50	165 6.50	9.8 21.6
	65 2 1/2	165 6.50	165 6.50	11.7 21.4
	80 3	165 6.50	165 6.50	12.0 26.5
	100 4	165 6.50	165 6.50	11.3 25.0
125 5	165 6.50	165 6.50	10.5 23.2	
	165.1 6 1/2 × 165.1 6 1/2 × 80 3	165 6.50	165 6.50 (sw)	10.9 24.0
100 4	165 6.50	165 6.50 (sw)	11.3 25.0	
	200 8 × 200 8 × 40 1 1/2	+	+	15.0 33.0
50 2	197 7.75 (sw)	197 7.75 (sw)	15.2 33.5	
	65 2 1/2	+	+	17.7 39.0
80 3	197 7.75 (sw)	197 7.75 (sw)	15.2 33.6	
	100 4	197 7.75	197 7.75	19.0 41.8
125 5	197 7.75 (sw)	197 7.75 (sw)	15.4 34.0	
	150 6	197 7.75	197 7.75	19.2 42.3
165.1	197 7.75 (sw)	197 7.75 (sw)	21.8 48.0	

TABLE CONTINUED ON PG. 2-9

350 – 600  
14 – 24



See AGS Roll Groove Fittings, pg. 5-2;  
 for 350 – 600mm/14 – 24" Cut Groove  
 Systems Request Publication 07.01


- + Contact Victaulic for details.
- # Ductile iron except those that are marked (sw), which are segmentally welded steel.
- @ Available with British Standard Pipe Threads, specify "BSP" clearly on order.


# Fittings

## Reducing Tee

**NO. 25** Grooved Branch  
**NO. 29** Threaded Branch  
(Ductile Iron#)

For Complete Information  
Request Publication **07.01**

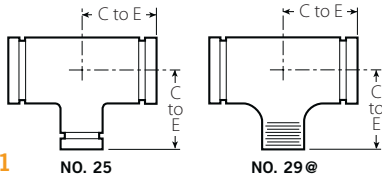

Size	No. 25 Std.	No. 29 w/ Thd. Branch	Approx. Weight Each	
Nominal Size mm Inches	C to E mm Inches	C to E mm Inches	kg Lbs.	
<b>TABLE CONTINUED FROM PG. 2-8</b>				
250 10 × 250 10 × 40 1 1/2	+	+	28.1 62.0	
	229 9.00 (sw)	229 9.00 (sw)	28.1 62.0	
	+	+	28.3 62.4	
	+	+	27.2 60.0	
	229 9.00 (sw)	229 9.00 (sw)	27.7 61.0	
	229 9.00 (sw)	229 9.00 (sw)	23.6 52.0	
	229 9.00 (sw)	229 9.00 (sw)	26.8 59.0	
	229 9.00 (sw)	229 9.00 (sw)	29.3 64.7	
	300 12 × 300 12 × 25 1	+	+	34.9 77.0
		+	+	36.3 80.0
+		+	35.4 78.0	
254 10.00 (sw)		254 10.00 (sw)	37.2 82.0	
254 10.00 (sw)		254 10.00 (sw)	36.3 80.0	
254 10.00 (sw)		254 10.00 (sw)	34.0 75.0	
254 10.00 (sw)		254 10.00 (sw)	34.0 75.0	
254 10.00 (sw)		254 10.00 (sw)	36.3 80.0	
254 10.00 (sw)		254 10.00 (sw)	38.1 84.0	
350 – 600 14 – 24		 See AGS Roll Groove Fittings, pg. 5-2; for 350–600 mm/14–24" Cut Groove Systems Request Publication <b>07.01</b>		

+ Contact Victaulic for details.


# Ductile iron except those that are marked (sw), which are segmentally welded steel.

@ Available with British Standard Pipe Threads, specify "BSP" clearly on order.

## Standpipe Tee

**NO. 27**  
(Ductile iron)

For Complete Information  
Request Publication **07.01**



Size	No. 27 Standpipe Tee	Approx. Weight Each
Nominal Size mm Inches	C to EOR mm Inches	kg Lbs.
100 4 × 100 4 × 65 2 1/2	83 3.25	102 4.00
150 6 × 150 6 × 65 2 1/2	83 3.25	130 5.13


### IMPORTANT NOTE:

@ Available with British Standard Pipe Threads, specify "BSP" clearly on order.

## Bullhead Tee

**NO. 21**  
(Ductile Iron)

For Complete Information  
Request Publication **07.01**



Size	No. 21 Bullhead Tee	Approx. Weight Each
Nominal Size mm Inches	C to EOR mm Inches	kg Lbs.
125 5 × 125 5 × 200 8	197 7.75	140 5.50
150 6 × 150 6 × 200 8	197 7.75	165 6.50

## Bull Plug

**NO. 61**  
(Steel)

For Complete Information  
Request Publication **07.01**



Size	No. 61 Bull Plug	Approx. Weight Each
Nominal Size mm Inches	Actual Outside Diameter mm Inches	kg Lbs.
50 2	60.3 2.375	1.1 2.5
65 2 1/2	73.0 2.875	1.4 3.0
80 3	88.9 3.500	2.0 4.5
100 4	114.3 4.500	3.4 7.5
125 5	141.3 5.563	5.4 12.0
150 6	168.3 6.625	7.7 17.0

### IMPORTANT NOTES:

Steel dish caps available through 600 mm/24", contact Victaulic.

No. 61 Bull Plugs should be used in vacuum service with Style 72 or 750 couplings.




# Fittings

## 45° Lateral

**NO. 30**  
(Segmentally Welded Steel#)

For Complete Information  
Request Publication **07.01**




**NO. 30**


## 45° Reducing Lateral

**NO. 30-R**  
(Segmentally Welded Steel)


For Complete Information  
Request Publication **07.01**



**NO. 30-R**

Size		No. 30 45° Lateral		
Nominal Size mm Inches	Actual Outside Diameter mm Inches	C to LE mm Inches	C to SE mm Inches	Approx. Weight Each kg Lbs.
20 3/4	26.9 1.050	114 4.50	51 2.00	0.5 1.0
25 1	33.7 1.315	127 5.00	57 2.25	0.8 1.7
32 1 1/4	42.4 1.660	146 5.75	64 2.50	1.1 2.5 (d)
40 1 1/2	48.3 1.900	159 6.25	70 2.75	1.6 3.5
50 2	60.3 2.375	178 7.00	70 2.75	2.1 4.6 (d)
65 2 1/2	73.0 2.875	197 7.75	76 3.00	4.1 9.0
76.1 mm	76.1 3.000	216 8.50	83 3.25	5.0 11.0
80 3	88.9 3.500	216 8.50	83 3.25	5.4 11.7 (d)
90 3 1/2	101.6 4.000	254 10.00	89 3.50	8.1 17.8
100 4	114.3 4.500	267 10.50	95 3.75	10.1 22.2 (d)
125 5	141.3 5.563	318 12.50	102 4.00	9.9 21.8
165.1 mm	165.1 6.500	356 14.00	114 4.50	19.8 43.6
150 6	168.3 6.625	356 14.00	114 4.50	19.8 43.6
200 8	219.1 8.625	457 18.00	152 6.00	32.7 72.0
250 10	273.0 10.750	521 20.50	165 6.50	47.6 105.0
300 12	323.9 12.750	584 23.00	178 7.00	74.8 165.0
350 – 600 14 – 24	 See AGS Roll Groove Fittings, pg. 5-2; for 350–600 mm/14–24" Cut Groove Systems Request Publication 07.01			

# Segmentally welded steel except those marked (d) which are ductile iron.


Size			No. 30-R 45° Reducing Lateral				
Nominal Size mm Inches			C to LE mm Inches	C to SE mm Inches	Approx. Weight Each kg Lbs.		
80 3	×	80 3	×	50 2	216 8.50	83 3.25	4.4 9.8
				65 2 1/2	216 8.50	83 3.25	4.4 9.8
100 4	×	100 4	×	50 2	267 10.50	95 3.75	4.5 10.0
				65 2 1/2	267 10.50	95 3.75	4.5 10.0
				80 3	267 10.50	95 3.75	8.3 18.3
125 5	×	125 5	×	50 2	318 12.50	102 4.00	10.9 24.0
				80 3	318 12.50	102 4.00	12.2 27.0
				100 4	318 12.50	102 4.00	12.0 26.5
150 6	×	150 6	×	80 3	356 14.00	114 4.50	16.8 37.0
				100 4	356 14.00	114 4.50	16.3 36.0
				125 5	356 14.00	114 4.50	20.3 44.7
200 8	×	200 8	×	100 4	457 18.00	152 6.00	28.1 62.0
				125 5	457 18.00	152 6.00	34.2 75.5
				150 6	457 18.00	152 6.00	37.2 82.0
250 10	×	250 10	×	100 4	521 20.50	165 6.50	47.5 104.8
				125 5	521 20.50	165 6.50	44.9 99.0
				150 6	521 20.50	165 6.50	48.0 105.8
				200 8	521 20.50	165 6.50	53.5 118.0
300 12	×	300 12	×	125 5	584 23.00	178 7.00	55.3 122.0
				150 6	584 23.00	178 7.00	62.1 137.0
				200 8	584 23.00	178 7.00	66.7 147.0
				250 10	584 23.00	178 7.00	75.8 167.0
350 – 600 14 – 24			 See AGS Roll Groove Fittings, pg. 5-2; for 350–600 mm/14–24" Cut Groove Systems Request Publication 07.01				

# Fittings

## Tee Wye

**NO. 32**  
(Segmentally Welded Steel)

For Complete Information  
Request Publication **07.01**




No. 32

## Reducing Tee Wye

**NO. 32-R**  
(Segmentally Welded Steel)

For Complete Information  
Request Publication **07.01**



No. 32-R

Size			No. 32 Tee Wye				Approx. Wgt. Each kg Lbs.
Nominal Size mm Inches	G mm Inches	H mm Inches	E <sub>1</sub> mm Inches	E <sub>2</sub> mm Inches			
50 2 × 50 2 × 50 2	70 2.75	178 7.00	229 9.00	118 4.63	2.9 6.4		
65 2½ × 65 2½ × 65 2½	76 3.00	197 7.75	267 10.50	146 5.75	5.2 11.5		
80 3 × 80 3 × 80 3	83 3.25	216 8.50	292 11.50	165 6.50	6.5 14.3		
90 3½ × 90 3½ × 90 3½	89 3.25	254 10.00	330 13.00	197 7.75	10.4 22.9		
100 4 × 100 4 × 100 4	95 3.75	267 10.50	346 13.63	207 8.13	11.8 26.0		
125 5 × 125 5 × 125 5	102 4.00	318 12.50	410 16.13	254 10.00	21.8 48.0		
150 6 × 150 6 × 150 6	114 4.50	356 14.00	464 18.25	292 11.50	27.4 60.5		
200 8 × 200 8 × 200 8	152 6.00	457 18.00	591 23.25	387 15.25	57.7 127.1		
250 10 × 250 10 × 250 10	165 6.50	521 20.50	692 27.25	457 18.00	86.2 190.0		
300 12 × 300 12 × 300 12	178 7.00	584 23.00	787 31.00	521 20.50	108.9 240.0		
350 – 600 14 – 24	See AGS Roll Groove Fittings, pg. 5-2; for 350–600 mm/14–24" Cut Groove Systems Request Publication 07.01						

Size			No. 32-R Reducing Tee Wye				Approx. Wgt. Each kg Lbs.
Nominal Size mm Inches	G mm Inches	H mm Inches	E <sub>1</sub> mm Inches	E <sub>2</sub> mm Inches			
100 4 × 80 3 × 80 3	89 3.50	241 9.50	273 10.75	146 5.75	7.3 16.0		
	95 3.75	267 10.50	346 13.63	206 8.13	7.3 16.0		
100 4 × 100 4 × 80 3	95 3.75	267 10.50	327 12.88	200 7.88	10.4 23.0		
	32 1.25	248 9.75	292 11.50	194 7.63	11.3 25.0		
125 5 × 80 3 × 80 3	102 4.00	318 12.50	410 16.13	283 11.13	19.5 43.4		
	48 1.88	232 9.13	302 11.88	175 6.88	9.5 21.0		
125 5 × 100 4 × 80 3	48 1.88	232 9.13	324 12.75	184 7.25	11.3 25.0		
	102 4.00	318 12.50	362 14.25	235 9.25	13.2 29.0		
125 5 × 125 5 × 100 4	102 4.00	318 12.50	384 15.13	245 9.63	16.6 36.7		
	114 4.50	356 14.00	464 18.25	292 11.50	27.7 61.0		
150 6 × 100 4 × 150 6	32 1.25	273 10.75	330 13.00	203 8.00	12.2 27.0		
	32 1.25	273 10.75	352 13.88	213 8.38	14.1 31.0		
150 6 × 150 6 × 80 3	114 4.50	356 14.00	389 15.31	262 10.31	16.9 37.3		
	114 4.50	356 14.00	413 16.25	273 10.75	21.0 46.3		
	114 4.50	356 14.00	438 17.25	283 11.13	24.9 55.0		
200 8 × 150 6 × 100 4	25 1.00	304 12.00	375 14.75	235 9.25	20.4 45.0		
	152 6.00	457 18.00	591 23.25	387 15.25	50.8 112.0		
200 8 × 200 8 × 80 3	152 6.00	457 18.00	462 18.19	335 13.19	34.5 76.0		
	152 6.00	457 18.00	483 19.00	343 13.50	34.7 76.4		
	152 6.00	457 18.00	508 20.00	352 13.88	38.8 85.6		
	152 6.00	457 18.00	537 21.13	365 14.38	50.8 112.0		
	165 6.50	521 20.50	605 23.84	410 16.13	90.9 201.5		
250 10 × 250 10 × 80 3	165 6.50	521 20.50	505 19.88	378 14.88	43.5 96.0		
	165 6.50	521 20.50	527 20.75	387 15.25	44.2 97.4		
	165 6.50	521 20.50	556 21.88	400 15.75	52.2 115.0		
	165 6.50	521 20.50	581 22.88	410 16.13	60.4 133.1		
	165 6.50	521 20.50	692 27.25	489 19.25	70.8 156.0		


SECTION 2: FITTINGS

# Fittings


## Adapter Nipple

**NO. 40** Grv. x Thd.  
**NO. 42** Grv. x Bev.  
**NO. 43** Grv. x Grv.  
 (Steel)


For Complete Information Request Publication **07.01**




NO. 40@



NO. 42



NO. 43

Size		No. 40, 42, 43 Adapter Nipple (sw)	
Nominal Size mm Inches	Actual Outside Diameter mm Inches	E to E mm Inches	Approx. Weight Each kg Lbs.
20 3/4	26.9 1.050	76 3.00	0.1 0.3
25 1	33.7 1.315	76 3.00	0.2 0.4
32 1 1/4	42.4 1.660	102 4.00	0.4 0.8
40 1 1/2	48.3 1.900	102 4.00	0.4 0.9
50 2	60.3 2.375	102 4.00	0.5 1.2
65 2 1/2	73.0 2.875	102 4.00	0.9 1.9
80 3	88.9 3.500	102 4.00	1.1 2.5
90 3 1/2	101.6 4.000	102 4.00	0.9 2.1
100 4	114.3 4.500	152 6.00	2.5 5.5
125 5	141.3 5.563	152 6.00	3.4 7.4
150 6	168.3 6.625	152 6.00	4.3 9.5
200 8	219.1 8.625	152 6.00	6.4 14.2
250 10	273.0 10.750	203 8.00	12.2 27.0
300 12	323.9 12.750	203 8.00	15.0 33.0
350 – 600 14 – 24	 See AGS Roll Groove Fittings, pg. 5-2; for 350–600 mm/14–24" Cut Groove Systems Request Publication 07.01		

@ Available with British Standard Pipe Threads, specify "BSP" clearly on order.

### IMPORTANT NOTES:

For pump package nipples with 40 mm/1 1/2" hole cut to receive Style 923 Vic-Let or Style 924 Vic-O-Well request special No. 40, 42 or 43 nipples and specify No. 40-H, 42-H or 43-H on order. NOTE: 100–300 mm/4–12" diameter – 200 mm/8" minimum length required.


## Cap

**NO. 60**  
 (Ductile Iron)

For Complete Information Request Publication **07.01**



NO. 60

Size		No. 60 Cap	
Nominal Size mm Inches	Actual Outside Diameter mm Inches	T Thickness mm Inches	Approx. Weight Each kg Lbs.
20 3/4	26.9 1.050	22 0.88	0.1 0.2
25 1	33.7 1.315	22 0.88	0.1 0.3
32 1 1/4	42.4 1.660	22 0.88	0.1 0.3
40 1 1/2	48.3 1.900	22 0.88	0.2 0.5
50 2	60.3 2.375	22 0.88	0.3 0.6
65 2 1/2	73.0 2.875	22 0.88	0.5 1.0
76.1 mm	76.1 3.000	22 0.88	0.5 1.2
80 3	88.9 3.500	22 0.88	0.5 1.2
90 3 1/2	101.6 4.000	22 0.88	1.1 2.5
108.0 mm	108.0 4.250	25 1.00	1.0 2.3
100 4	114.3 4.500	25 1.00	1.1 2.5
133.0 mm	133.0 5.250	25 1.00	2.0 4.5
139.7 mm	139.7 5.500	25 1.00	2.0 4.5
125 5	141.3 5.563	25 1.00	2.1 4.6
159.0 mm	159.0 6.250	25 1.00	3.1 6.8
165.1 mm	165.1 6.500	25 1.00	3.3 7.3
150 6	168.3 6.625	25 1.00	2.8 6.1
200 8	219.1 8.625	30 1.19	5.9 13.1
250 10	273.0 10.750	32 1.25	9.5 21.0
300 12	323.9 12.750	32 1.25	16.2 35.6
350 – 600 14 – 24	 See AGS Roll Groove Fittings, pg. 5-2; for 350–600 mm/14–24" Cut Groove Systems Request Publication 07.01		

### IMPORTANT NOTES:

Steel dish caps available through 600 mm/24", contact Victaulic. No. 60 cap available threaded or tapped. Contact Victaulic for details.  
 No. 60 cap is not suitable for use in vacuum service with Style 72 or 750 couplings. No. 61 bull plugs should be used, see pg. 2-8.

# Fittings

## Flanged Adapter Nipple

**NO. 41** ANSI Class 125 (Cast Iron)


**NO. 45F** ANSI Class 150 Flat Face (Steel)

**NO. 45R** ANSI Class 150 Raised Face (Steel)


**NO. 46F** ANSI Class 300 Flat Face (Steel)

**NO. 46R** ANSI Class 300 Raised Face (Steel)


For Complete Information  
Request Publication **07.01**




NO. 41




NO. 45F



NO. 45R



NO. 46F



NO. 46R

Size		No. 41 ANSI 125 Flange Adapter Nipple		No. 45F and No. 45R ANSI 150 Flange Adapter Nipple		No. 46F and No. 46R ANSI 300 Flange Adapter Nipple	
Nominal Size mm Inches	Actual Outside Diameter mm Inches	E to E mm Inches	Approx. Weight Each kg Lbs.	E to E mm Inches	Approx. Weight Each kg Lbs.	E to E mm Inches	Approx. Weight Each kg Lbs.
20 3/4	26.9 1.050	76 3.00	1.0 2.3	76 3.00	1.0 2.3	76 3.00	1.5 3.3
25 1	33.7 1.315	76 3.00	1.1 2.5	76 3.00	1.2 2.7	76 3.00	1.8 3.9
32 1 1/4	42.4 1.660	102 4.00	1.4 3.0	102 4.00	1.5 3.3	102 4.00	2.2 4.8
40 1 1/2	48.3 1.900	102 4.00	1.6 3.5	102 4.00	1.8 3.9	102 4.00	3.1 6.9
50 2	60.3 2.375	102 4.00	2.5 5.5	102 4.00	2.8 6.2	102 4.00	3.7 8.2
65 2 1/2	73.0 2.875	102 4.00	3.6 8.0	102 4.00	4.5 9.9	102 4.00	5.4 11.9
80 3	88.9 3.500	102 4.00	4.3 9.5	102 4.00	5.2 11.4	102 4.00	7.5 16.5
90 3 1/2	101.6 4.000	102 4.00	5.4 12.0	102 4.00	6.8 15.1	102 4.00	9.1 20.1
100 4	114.3 4.500	152 6.00	7.6 16.7	152 6.00	8.3 18.4	152 6.00	12.4 27.4
125 5	141.3 5.563	152 6.00	9.8 21.5	152 6.00	9.7 21.3	152 6.00	16.0 35.3
150 6	168.3 6.625	152 6.00	12.0 26.5	152 6.00	12.5 27.5	152 6.00	21.5 47.5
200 8	219.1 8.625	152 6.00	17.7 39.0	152 6.00	18.8 41.3	152 6.00	31.9 70.3
250 10	273.0 10.750	203 8.00	25.9 57.0	203 8.00	27.1 59.8	203 8.00	45.7 100.8
300 12	323.9 12.750	203 8.00	18.6 41.0	203 8.00	40.0 88.2	203 8.00	66.3 146.2
350 - 600 14 - 24	<b>AGS</b> ™ See AGS Roll Groove Fittings, pg. 5-2; for 350-600mm/14-24" Cut Groove Systems Request Publication 07.01						

### IMPORTANT NOTES:


Flanged adapter nipples are supplied with standard rolled grooves. Standard cut grooves or machining for rubber lining are optionally available. Contact Victaulic for details.

# Fittings


## Swaged Nipple

**NO. 53** Grv. × Grv.  
**NO. 54** Grv. × Thd.  
**NO. 55** Thd. × Grv.  
 (Steel)


For Complete Information  
 Request Publication **07.01**



**NO. 53**



**NO. 54@**



**NO. 55@**

Size		No. 53, 54 and 55 Swaged Nipples	
Nominal Size mm	Inches	E to E mm	Approx. Weight Each kg Lbs.
50	2 × 25	165	0.9
		6.50	2.0
	1 1/4 × 32	165	0.9
		6.50	2.0
	1 1/2 × 40	165	0.9
		6.50	2.0
65	2 1/2 × 25	178	1.4
		7.00	3.0
	1 1/4 × 32	178	1.4
		7.00	3.0
	1 1/2 × 40	178	1.4
		7.00	3.0
	2 × 50	178	1.4
		7.00	3.0
80	3 × 25	2.0	2.0
		8.00	4.5
	1 1/4 × 32	203	2.0
		8.00	4.5
	1 1/2 × 40	203	2.0
		8.00	4.4
	2 × 50	203	2.0
		8.00	4.5
	2 1/2 × 65	203	2.0
		8.00	4.5
90	3 1/2 × 80	203	3.1
		8.00	6.8
100	4 × 25	229	3.4
		9.00	7.5
	1 1/4 × 32	229	3.4
		9.00	7.5
	1 1/2 × 40	229	3.4
		9.00	7.5
	2 × 50	229	3.4
		9.00	7.5

Size		No. 53, 54 and 55 Swaged Nipples			
Nominal Size mm	Inches	E to E mm	Approx. Weight Each kg Lbs.		
100	4 × 65	229	3.4		
		9.00	7.5		
	3 × 80	229	3.4		
		9.00	7.5		
	3 1/2 × 90	229	3.4		
		9.00	7.5		
125	5 × 50	279	5.2		
		11.00	11.5		
	3 × 80	279	5.1		
		11.00	11.3		
	4 × 100	279	5.2		
		11.00	11.5		
150	6 × 25	305	7.7		
		12.00	17.0		
			1 1/4 × 32	305	7.7
				12.00	17.0
			1 1/2 × 40	305	7.8
				12.00	17.2
	2 × 50	305	7.9		
		12.00	17.4		
	2 1/2 × 65	305	7.9		
		12.00	17.4		
	3 × 80	305	7.9		
		12.00	17.4		
	3 1/2 × 90	305	7.9		
		12.00	17.4		
	4 × 100	305	7.9		
		12.00	17.5		
	4 1/2 × 120	305	7.9		
		12.00	17.5		
	5 × 125	305	7.9		
		12.00	17.5		
200	8 × 150	+	9.1		
			20.0		

+ Contact Victaulic for details.


@ Available with British Standard Pipe Threads, specify "BSP" clearly on order.

# Fittings

## Female Threaded Adapter

**NO. 80**  
(Ductile Iron#)

For Complete Information  
Request Publication **07.01**




**NO. 80@**

## Hose Nipple

**NO. 48**  
(Segmentally Welded Steel)

For Complete Information  
Request Publication **07.01**



**NO. 48**

Size		No. 80 Female Threaded Adapter	
Nominal Size mm Inches	Actual Outside Diameter mm Inches	E to E mm Inches	Approx. Weight Each kg Lbs.
20 ¾	26.9 1.050	51 2.00	0.5 1.0
25 1	33.7 1.315	52 2.06	0.5 1.0
32 1¼	42.4 1.660	59 2.31 (sw)	0.7 1.5
40 1½	48.3 1.900	59 2.31 (sw)	0.7 1.5
50 2	60.3 2.375	64 2.50	0.6 1.4
65 2½	73.0 2.875	70 2.75	0.7 1.5
80 3	88.9 3.500	70 2.75	1.3 2.9
100 4	114.3 4.500	83 3.25	2.0 4.5

Size		No. 48 Hose Nipple	
Nominal Size mm Inches	Actual Outside Diameter mm Inches	E to E mm Inches	Approx. Weight Each kg Lbs.
20 ¾	26.9 1.050	79 3.12	0.1 0.3
25 1	33.7 1.315	86 3.38	0.2 0.4
32 1¼	42.4 1.660	98 3.88	0.3 0.6
40 1½	48.3 1.900	98 3.88	0.4 0.8
50 2	60.3 2.375	114 4.50	0.5 1.1
65 2½	73.0 2.875	137 5.38	0.9 2.0
80 3	88.9 3.500	146 5.75	1.5 3.2
100 4	114.3 4.500	178 7.00	2.2 4.9
125 5	141.3 5.563	222 8.75	3.6 8.0
150 6	168.3 6.625	257 10.12	6.5 14.3
200 8	219.1 8.625	302 11.88	11.2 24.7
250 10	273.0 10.750	318 12.50	18.2 40.1
300 12	323.9 12.750	368 14.50	28.1 62.0

# Ductile iron except those marked (sw) which are segmentally welded steel.


@ Available with British Standard Pipe Threads, specify "BSP" clearly on order.

# Fittings

## Concentric/Eccentric Reducer

**NO. 50** Concentric  
**NO. 51** Eccentric  
 (Ductile Iron#)

For Complete Information  
 Request Publication **07.01**



Size	No. 50 Concentric Reducer		No. 51 Eccentric Reducer			
	Nominal Size mm Inches	E to E mm Inches	Approx. Weight Each kg Lbs.	E to E mm Inches	Approx. Weight Each kg Lbs.	
32 1 1/4	× 20 3/4	+	0.9 1.9	—	—	
		25 1	+	0.9 1.9	—	—
40 1 1/2	× 20 3/4	+	0.6 1.4	—	—	
		25 1	64* 2.50	0.4 0.8	216(sw) 8.50	2.0 4.5
		32 1 1/4	64* 2.50	0.5 1.0	—	—
50 2	× 20 3/4	64* 2.50	0.3 0.9	229(sw) 9.00	0.9 2.0	
		25 1	64* 2.50	0.3 0.7	229(sw) 9.00	1.0 2.3
		32 1 1/4	64* 2.50	0.5 1.2	229(sw) 9.00	2.1 4.6
		40 1 1/2	64* 2.50	0.5 1.0	89 3.50	2.1 4.6
65 2 1/2 †	× 20 3/4	+	0.6 1.3	+	1.5 3.3	
		25 1	64 2.50	1.5 3.6	241(sw) 9.50	1.6 3.5
		32 1 1/4	64*(sw) 2.50	1.5 3.3	89 3.50	+
		40 1 1/2	64* 2.50	1.6 3.6	241(sw) 9.50	1.7 3.7
		50 2	64 2.50	1.8 3.9	241(sw) 9.50	2.0 4.3
80 3	× 20 3/4	+	0.7 1.5	+	2.0 4.5	
		25 1	64* 2.50	0.6 1.3	241(sw) 9.50	2.2 4.8
		32 1 1/4	64 2.50	1.4 3.0	+	2.2 4.8
		40 1 1/2	64* 2.50	2.3 5.1	241(sw) 9.50	2.3 5.1
		50 2	64* 2.50	0.7 1.6	89 3.50	2.7 6.0
		65 2 1/2	64* 2.50	0.8 1.8	89 3.50	3.2 7.0
		76.1	64 2.50	1.0 2.1	—	—
90 3 1/2	× 80 3	64 2.50	0.9 2.0	241(sw) 9.50	3.2 7.0	
		76* 3.00	1.4 3.0	330(sw) 13.00	2.9 6.5	
100 4	× 25 1	+	2.1 4.6	—	—	
		76 3.00	3.1 6.9	254(sw) 10.00	3.7 8.1	
		50 2	76* 3.00	1.1 2.4	102 4.00	1.5 3.3
		65 2 1/2	76* 3.00	1.2 2.7	102 4.00	1.5 3.4
		80 3	76* 3.00	1.4 3.2	102 4.00	1.6 3.5
		90 3 1/2	76 3.00	1.3 2.9	254(sw) 10.00	3.6 8.0

Size	No. 50 Concentric Reducer		No. 51 Eccentric Reducer					
	Nominal Size mm Inches	E to E mm Inches	Approx. Weight Each kg Lbs.	E to E mm Inches	Approx. Weight Each kg Lbs.			
125 5	× 50 2	279(sw) 11.00	4.1 9.0	279(sw) 11.00	2.4 5.2			
		65 2 1/2	102 4.00	5.0 11.0	279(sw) 11.00	4.9 10.8		
		80 3	102 4.00	2.5 5.5	279(sw) 11.00	5.0 11.1		
		100 4	89 3.50	1.9 4.3	127 5.00	5.4 12.0		
150 † 6	× 25 1	102* 4.00	2.3 5.0	292(sw) 11.50	6.6 14.5			
		40 1 1/2	+	2.5 5.5	+	+		
		50 2	102* 4.00	3.0 6.6	292(sw) 11.50	6.6 14.5		
		65 2 1/2	102* 4.00	2.9 6.4	292(sw) 11.50	14.2 6.4		
		80 3	102* 4.00	2.9 6.4	140 5.50	6.8 15.0		
		100 4	102 4.00	2.9 6.5	140 5.50	7.7 17.0		
		125 5	102 4.00	2.9 6.4	140 5.50	7.7 17.0		
165.1 ×	50 2	—	2.7 6.0	—	—			
		76.1 3	102 4.00	2.9 6.4	292 11.50 (sw)	6.4 14.2		
		80 3	102 4.00	2.7 6.0	—	3.1 6.8		
		100 4	102 4.00	2.7 6.0	—	3.25 7.2		
		139.7	102 4.00	2.9 6.4	140 5.50	7.7 17.0		
		200 8	65 2 1/2	406 16.00	3.6 7.9	305(sw) 12.00	11.8 26.1	
200 8	× 76.1	406 16.00	3.6 7.9	305 12.00 (sw)	11.8 26.1			
		80 3	127 5.00	4.2 9.3	305(sw) 12.00	10.0 22.0		
		100 4	127 5.00	4.8 10.4	305(sw) 12.00	10.4 23.0		
		125 5	127 5.00	5.2 11.6	305(sw) 12.00	10.4 23.0		
		150 6	127 5.00	5.4 11.9	152 6.00	10.9 24.0		
		165.1	127 5.00	5.4 11.9	152 6.00	10.9 24.0		
		250 10	× 100 4	152 6.00	8.9 19.7	330(sw) 13.00	14.5 32.0	
				125 5	+	15.6 34.3	+	15.7 34.6
				150 6	152 6.00	9.1 20.0	330(sw) 13.00	16.7 36.9
				200 8	152 6.00	10.0 22.0	178 7.00	9.8 21.6

TABLE CONTINUED ON PG. 2-17, SEE FOOTNOTES ON PG. 2-17


# Fittings

## Concentric/Eccentric Reducer (cont'd)


**NO. 50** Concentric

**NO. 51** Eccentric  
(Ductile Iron#)


For Complete Information  
Request Publication **07.01**



NO. 50



NO. 51

Size	No. 50 Concentric Reducer		No. 51 Eccentric Reducer		
	Nominal Size mm Inches	E to E mm Inches	Approx. Weight Each kg Lbs.	E to E mm Inches	Approx. Weight Each kg Lbs.
<b>TABLE CONTINUED FROM PG. 2-16</b>					
300 12	× 100 4	+	20.0	356(sw)	21.8
			44.0	14.00	48.0
	150 6	178 7.00	11.2	356(sw)	22.7
			24.6	14.00	50.0
	200 8	178 7.00	23.6	356(sw)	24.3
52.0			14.00	53.5	
250 10	178 7.00	17.7	356(sw)	25.9	
		39.0	14.00	57.0	
350 – 600 14 – 24	 See AGS Roll Groove Fittings, pg. 5-2; for 350–600mm/14–24" Cut Groove Systems Request Publication 07.01				

+ Contact Victaulic for details.

\* Available with male threaded small end No. 52.

# Ductile Iron except those marked (sw) which are segmentally welded steel.

† Available in 76.1 mm and 165.1 mm sizes to these dimensions.

**IMPORTANT NOTE:**

Steel eccentric reducers available through 750mm/30", contact Victaulic.



# Fittings

## Small Threaded Reducer

**NO. 52**

**NO. 52F** (BSPT)

(Ductile Iron#)

For Complete Information  
Request Publication **07.01**



NO. 52



NO. 52F

Size	No. 52 Small Threaded Reducer		No. 52F Small Threaded Reducer (BSPT)	
	Nominal Size mm Inches	E to E mm Inches	Approx. Weight Each kg Lbs.	Approx. Weight Each kg Lbs.
40 1½ ×	25 1	64 2.50	0.4 0.8	—
	32 1¼	64 2.50	0.4 0.9	—
50 2 ×	20 ¾	64 2.50	0.4 0.9	—
	25 1	64 2.50	0.3 0.7	—
	32 1¼	64 2.50	0.5 1.2	—
65 2½ ×	40 1½	64 2.50	0.5 1.0	—
	50 2	76 3.00	0.6 1.4	—
	25 ¾	+(sw)	0.5 1.0	—
	32 1¼	64 2.50 (sw)	0.5 1.2	—
76.1 † ×	48.3	63.5	0.8	63.5
	60.0	—	—	63.5
80 3 ×	20 ¾	+(sw)	0.7 1.5	—
	25 1	64 2.50	0.6 1.3	—
	40 1½	64 2.50 (sw)	0.7 1.5	—
	50 2	64 2.50	0.7 1.5	—
	65 2½	64 2.50	1.1 2.4	—
88.9 † ×	42.4	63.5	0.9	63.5
	48.3	63.5	0.9	63.5
	60.0	—	—	63.5
100 4 ×	25 1	76 3.00	1.0 2.3	—
	40 1½	+(sw)	1.1 2.5	—
	50 2	76 3.00	1.2 2.6	—
	65 2½	76 3.00	1.2 2.6	—
	80 3	76 3.00	1.1 2.5	—

Size	No. 52 Small Threaded Reducer		No. 52F Small Threaded Reducer (BSPT)	
	Nominal Size mm Inches	E to E mm Inches	Approx. Weight Each kg Lbs.	Approx. Weight Each kg Lbs.
108.0 † ×	42.4	76.2	1.3	76.2
	48.3	76.2	1.3	76.2
	60.0	—	—	76.2
114.3 † ×	42.4	76.2	1.3	76.2
	48.3	76.2	1.3	76.2
	60.0	—	—	76.2
125 5 ×	100 4	+(sw)	2.0 4.5	—
133.0 † ×	60.0	—	—	114.3
139.0 † ×	60.0	—	—	114.3
150 6 ×	25 1	102 4.00	2.5 5.5	—
	50 2	102 4.00	2.6 5.7	—
	65 2½	102 4.00	2.6 5.8	—
	80 3	102 4.00	2.6 5.8	—
	100 4	+(sw)	2.9 6.5	—
159.0 † ×	125 5	+(sw)	7.9 17.5	—
	42.4	114.3	2.2	114.3
	48.3	114.3	2.2	114.3
	60.0	—	—	114.3
	60.0	—	—	114.3
165.1 † ×	42.4	101.6	2.4	101.6
	48.3	101.6	2.6	101.6
	60.0	—	—	101.6
200 8 ×	50 2	+(sw)	0.7 1.5	—
	65 2½	406 16.00	0.8 1.7	—

+ Contact Victaulic for details.

# Ductile iron except those marked (sw) which are segmentally welded steel.

† Available in metric sizes only.

# Valves

Designed for a wide variety of applications, Victaulic valves are engineered and manufactured for dependable, trouble-free performance, superior flow control and durable, long-lasting reliability.

Victaulic offers a full complement of butterfly, check, ball and triple service valves in a variety of wear-resistant materials and coatings to satisfy your specific piping application requirements.

## Advanced Groove System **AGS™**



For 350–600 mm/14–24" piping systems  
Victaulic offers Advanced Groove System (AGS)  
butterfly and check valves, see pg. 5-1.

## Butterfly Valves



Victaulic butterfly valves deliver excellent performance characteristics, including low torque, high flow, dead-end service, and bi-directional flow capability to full rated pressure. Available in sizes from 40–600 mm/1½–24", our butterfly valves are offered in a variety of housing, disc and seat seal configurations, including bodies constructed of durable ductile iron, stainless steel, and bronze with EPDM, nitrile, or fluoroelastomer seat materials.

All butterfly valves available with manual handles, gear operators or automated configurations.

## Check Valves



Vic-Check valves are available in several configurations. A spring-assisted, single disc design is used on Series 716 check valves, which can be installed in the horizontal or vertical position. The Series 779 Venturi check valve allows for calibrated flow measurement and easily connects to Vic-300 MasterSeal butterfly valves for triple service assemblies. Also available are swing check valves for oil field applications.

## Ball Valves



The Vic-Ball® valve is a high-pressure, standard-port ball valve with grooved ends. Its internal design has been streamlined to provide excellent flow characteristics, and comes available in ductile iron and stainless steel versions. A three-port diverter ball for redirecting flow 90° left or right is also available. Vic-Ball valves are sized 40–150 mm/1½–6" depending on body construction type. A 10–50 mm/¾–2" threaded brass ball valve is also available for a variety of services.

## Triple Service Valves



The Victaulic tri-service valve assembly consists (shipped as individual components) of a standard Victaulic butterfly valve and a check valve. This combination provides shut-off, throttling with positive mechanical memory and non-slam check service in one unit.

The Series 779 check valve features accurate flow measurement capabilities plus spring assisted closing in a high flow design. The venturi-like inlet is drilled, tapped and plugged, ready to receive the flow measuring taps (included).

# Valves

## Valve Application Guide

Valve Type	Building Services	Industrial	Water and Wastewater	Mining	Oil Field	Plumbing
BUTTERFLY VALVES	●	●	●	●	●	●
CHECK VALVES	●	●	●	●	●	
BALL VALVES	●	●	●	●	●	
TRIPLE SERVICE VALVES	●	●				

### BUTTERFLY VALVES

- 3-3 Vic-300 MasterSeal®
- 3-5 Series 704 (Vic-235)
- 3-6 Series 700
- 8-10 Series 763 Stainless Steel
- 11-12 Series 608 Copper

### CHECK VALVES

- 3-9 Series 716
- 3-10 Series 779
- 3-11 Series 712
- 3-11 Series 713
- 8-12 Series 712S Stainless Steel

### BALL VALVES

- 3-12 Series 722
- 3-13 Series 726
- 8-13 Series 726S Stainless Steel

### TRIPLE SERVICE VALVES

- 3-8 Butterfly/Check Combo

### PLUG VALVES

- 3-15 Series 377


### PRODUCTS

- 1-12 Couplings
- 2-1 Fittings
- 3-1 Valves**
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software


# Valves – Butterfly Valves

## Vic-300 MasterSeal® Butterfly Valve


For Complete Information  
Request Publication **08.20**




bare valve  
Typical 2-  
12"/50-300 mm Sizes



Valve with 10-position  
handle Typical  
2-6"/50-150 mm Sizes



Valve with lever lock  
AND MEMORY STOP Typical  
FOR 8"/200 mm Sizes ONLY



Valve with lever lock  
AND MEMORY STOP Typical  
FOR 10-12"/250-300 mm Sizes

Size @		Dimensions																	Approx. Weight Each	
Nominal Size mm Inches	Actual Outside Dia. mm Inches	A mm Inches	B mm Inches	C mm Inches	D mm Inches	E mm Inches	F mm Inches	G mm Inches	H mm Inches	J mm Inches	M mm Inches	N mm Inches	P mm Inches	R-R mm Inches	S mm Inches	T-R mm Inches	U mm Inches	Z mm Inches	Bare kg Lbs.	Lever kg Lbs.
50 2	60.3 2.375	81.5 3.21	82.6 3.25	36.6 1.44	—	—	46.0 1.81	96.8 3.81	55.2 2.17	3.3 0.13	22.4 0.88	8.0 0.32	11.0 0.43	—	—	180.3 7.10	42.4 1.67	—	1.6 3.5	2.7 6.0
65 2½	73.0 2.875	95.8 3.77	101.6 4.00	45.0 1.77	—	—	53.3 2.10	108.0 4.25	55.2 2.17	3.3 0.13	22.4 0.88	8.0 0.32	11.0 0.43	—	—	180.3 7.10	42.4 1.67	—	2.3 5.0	3.4 7.5
76.1 mm	76.1 3.000	95.8 3.77	101.6 4.00	45.0 1.77	—	—	53.3 2.10	108.0 4.25	55.2 2.17	3.3 0.13	22.4 0.88	8.0 0.32	11.0 0.43	—	—	180.3 7.10	42.4 1.67	—	2.3 5.0	3.4 7.5
80 3	88.9 3.500	95.8 3.77	114.3 4.50	45.0 1.77	—	—	59.7 2.35	114.3 4.50	55.2 2.17	3.3 0.13	22.4 0.88	8.0 0.32	11.0 0.43	—	—	180.3 7.10	42.4 1.67	—	2.7 6.0	3.9 8.5
100 4	114.3 4.500	117.6 4.63	139.7 5.50	55.4 2.18	—	—	73.2 2.88	133.4 5.25	55.2 2.17	3.3 0.13	22.6 0.89	11.0 0.43	15.0 0.59	—	—	218.4 8.60	44.2 1.74	—	4.2 9.3	5.4 11.8
108.0 mm †	108.0 4.250	117.6 4.63	139.7 5.50	55.4 2.18	—	—	73.2 2.88	133.4 5.25	55.2 2.17	3.3 0.13	22.6 0.89	11.0 0.43	15.0 0.59	—	—	218.4 8.60	44.2 1.74	—	4.2 9.3	5.4 11.8
125 5	141.3 5.563	149.4 5.88	160.0 6.30	55.4 2.18	—	—	84.8 3.34	158.8 6.25	55.2 2.17	3.3 0.13	28.5 1.12	12.7 0.50	19.1 0.75	—	—	307.3 12.10	44.2 1.74	—	7.6 16.8	9.1 20.0
133.0 mm †	133.0 5.250	149.4 5.88	160.0 6.30	55.4 2.18	—	—	84.8 3.34	158.8 6.25	55.2 2.17	3.3 0.13	28.5 1.12	12.7 0.50	19.1 0.75	—	—	307.3 12.10	44.2 1.74	—	7.6 16.8	9.1 20.0
139.7 mm	139.7 5.500	149.4 5.88	160.0 6.30	55.4 2.18	—	—	84.8 3.34	158.8 6.25	55.2 2.17	3.3 0.13	28.5 1.12	12.7 0.50	19.1 0.75	—	—	307.3 12.10	44.2 1.74	—	7.6 16.8	9.1 20.0
150 6	168.3 6.625	149.4 5.88	185.4 7.30	59.2 2.33	10.6 0.42	—	97.3 3.83	171.5 6.75	55.2 2.17	3.3 0.13	28.5 1.12	12.7 0.50	19.1 0.75	—	—	307.3 12.10	44.2 1.74	—	9.1 20.0	10.5 23.2
159.0 mm †	159.0 6.250	149.4 5.88	185.4 7.30	59.2 2.33	10.6 0.42	—	97.3 3.83	171.5 6.75	55.2 2.17	3.3 0.13	28.5 1.12	12.7 0.50	19.1 0.75	—	—	307.3 12.10	44.2 1.74	—	9.1 20.0	10.5 23.2
165.1 mm	165.1 6.500	149.4 5.88	185.4 7.30	59.2 2.33	10.6 0.42	—	97.3 3.83	171.5 6.75	55.2 2.17	3.3 0.13	28.5 1.12	12.7 0.50	19.1 0.75	—	—	307.3 12.10	44.2 1.74	—	9.1 20.0	10.5 23.2
200 8	219.1 8.625	135.4 5.33	254.0 10.00	59.2 2.33	37.4 1.47	20.3 0.80	127.0 5.00	203.2 8.00	55.2 2.17	3.3 0.13	33.0 1.30	—	22.2 0.88	355.6 14.00	38.4 1.51	—	—	—	15.6 34.3	17.0 37.5
250 10	273.0 10.750	162.6 6.40	311.2 12.25	76.2 3.00	45.9 1.81	35.8 1.41	155.7 6.13	247.7 9.75	70.1 2.76	3.3 0.13	57.2 2.25	—	31.8 1.25	296.2 11.66	114.3 4.50	—	—	190.5 7.50	32.7 72.0	38.1 84.0
300 12	323.9 12.750	165.1 6.50	362.0 14.25	76.2 3.00	71.0 2.80	58.4 2.30	181.1 7.13	273.1 10.75	70.1 2.76	3.3 0.13	56.9 2.24	—	31.8 1.25	296.2 11.66	114.3 4.50	—	—	190.5 7.50	39.9 88.0	45.4 100.0
350 – 600 14 – 24	See Style Vic-300 MasterSeal AGS Butterfly Valve, pg. 5-11, Request Publication 20.06																			

- Pressure enhanced rubber seat within the valve body seals equally on both sides of the valve
- Stem bearings and pressure enhanced rubber seat keeps torque consistent over the life of the valve
- Standard ISO mounting flange for actuation
- 10 position handle is infinitely variable, padlockable and includes memory stop.
- Full bi-directional shut-off and dead end service capabilities to the full pressure rated up to 300psi/2065kPa
- Sizes from 2-12"/50-300mm

@ See pg.3-4 for flow coefficient.  
† Contact Victaulic for availability.


**IMPORTANT NOTE:**  
2-8"/50-200mm sizes are ISO Flange Designation F07; 10"/250mm and 12"/300mm sizes are ISO Flange Designation F10.

# Valves – Butterfly Valves


## Vic-300 MasterSeal Butterfly Valve

### WITH GEAR OPERATOR


For Complete Information  
Request Publication **08.20**



VALVE WITH GEAR OPERATOR HANDLE  
TYPICAL 50–165.1 mm/2–6" SIZES



VALVE WITH GEAR OPERATOR HANDLE  
TYPICAL 200–300 mm/8–12" SIZES

Size		Dimensions										Approx. Weight Each	Flow Coefficient@ (Fully Open)
Nominal Size mm Inches	Actual Outside Dia. mm Inches	A mm Inches	C mm Inches	E mm Inches	T mm Inches	U mm Inches	V mm Inches	W mm Inches	X mm Inches	Y mm Inches	kg Lbs.	K <sub>v</sub> Values C <sub>v</sub> Values	
50 2	60.3 2.375	81.5 3.21	36.6 1.44	—	40.1 1.58	112.5 4.43	173.7 6.84	44.5 1.75	92.5 3.64	100.1 3.94	2.7 6.0	99.5 115	
65 2½	73.0 2.875	95.8 3.77	45.0 1.77	—	40.1 1.58	112.5 4.43	184.9 7.28	44.5 1.75	92.5 3.64	100.1 3.94	3.4 7.5	224.9 260	
76.1 mm	76.1 3.000	95.8 3.77	45.0 1.77	—	40.1 1.58	112.5 4.43	184.9 7.28	44.5 1.75	92.5 3.64	100.1 3.94	3.4 7.5	224.9 260	
80 3	88.9 3.500	95.8 3.77	45.0 1.77	—	40.1 1.58	112.5 4.43	191.3 7.53	44.5 1.75	92.5 3.64	100.1 3.94	3.9 8.5	380.6 440	
108.0 mm †	108.0 4.250	117.6 4.63	55.4 2.18	—	40.1 1.58	112.5 4.43	210.3 8.28	44.5 1.75	92.5 3.64	100.1 3.94	5.4 11.8	709.3 820	
100 4	114.3 4.500	117.6 4.63	55.4 2.18	—	40.1 1.58	112.5 4.43	210.3 8.28	44.5 1.75	92.5 3.64	100.1 3.94	5.4 11.8	709.3 820	
133.0 mm †	133.0 5.250	149.4 5.88	55.4 2.18	—	50.0 1.97	122.9 4.84	249.2 9.81	57.9 2.28	112.5 4.43	125.0 4.92	9.4 20.8	1038.0 1200	
139.7 mm	139.7 5.500	149.4 5.88	55.4 2.18	—	50.0 1.97	122.9 4.84	249.2 9.81	57.9 2.28	112.5 4.43	125.0 4.92	9.4 20.8	1038.0 1200	
125 5	141.3 5.563	149.4 5.88	55.4 2.18	—	50.0 1.97	122.9 4.84	249.2 9.81	57.9 2.28	112.5 4.43	125.0 4.92	9.4 20.8	1038.0 1200	
159.0 mm †	159.0 6.250	149.4 5.88	59.2 2.33	—	50.0 1.97	122.9 4.84	261.9 10.31	57.9 2.28	112.5 4.43	125.0 4.92	10.9 24.0	1557.0 1800	
165.1 mm	165.1 6.500	149.4 5.88	59.2 2.33	—	50.0 1.97	122.9 4.84	261.9 10.31	57.9 2.28	112.5 4.43	125.0 4.92	10.9 24.0	1557.0 1800	
150 6	168.3 6.625	149.4 5.88	59.2 2.33	—	50.0 1.97	122.9 4.84	261.9 10.31	57.9 2.28	112.5 4.43	125.0 4.92	10.9 24.0	1557.0 1800	
200 8	219.1 8.625	135.4 5.33	59.2 2.33	20.3 0.80	50.0 1.97	122.9 4.84	293.6 11.56	57.9 2.28	112.5 4.43	125.0 4.92	17.4 38.3	2941.0 3400	
250 10	273.0 10.750	162.6 6.40	76.2 3.00	35.8 1.41	73.2 2.88	197.1 7.76	384.3 15.13	82.6 3.25	160.0 6.30	199.9 7.87	39.0 81.5	5017.0 5800	
300 12	323.9 12.750	165.1 6.50	76.2 3.00	58.4 2.30	73.2 2.88	197.1 7.76	409.7 16.13	82.6 3.25	160.0 6.30	199.9 7.87	44.2 97.5	7785.0 9000	
350 – 600 14 – 24	 See Vic-300 AGS Butterfly Valve, pg. 5-11, Request Publication 20.06												


@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/60°F with valve fully open.

† Contact Victaulic for availability.

#### IMPORTANT NOTE:

50–200 mm/2–8" sizes are ISO Flange Designation F07; 250 mm/10" and 300 mm/12" sizes are ISO Flange Designation F10.

#### CHAIN WHEEL AND GUIDE FOR GEAR OPERATED BUTTERFLY VALVES

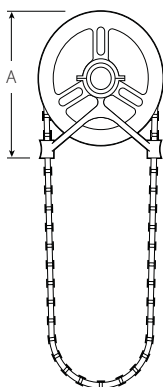

Size	Dimensions		Approx. Weight Each
Nominal Size Inches mm	Sprocket Size	Chain Wheel Size (Dia.) Inches mm	Lbs. kg
50 – 100 2 – 4	0	10 4.00	0.9 2.0
125 – 200 5 – 8	1	146 5.75	1.8 4.0
250 – 300 10 – 12	2	229 9.00	4.5 10.0

#### IMPORTANT NOTES:

Chain wheels are mounted to the gear operator hand wheels. Sprocket rim and guide arms are made of cast aluminum and chain is galvanized steel. Always specify length of chain required. For insulation and locking device, contact Victaulic for details.

# Valves – Butterfly Valves

## Vic-235 Butterfly Valve

### SERIES 704

For Complete Information  
Request Publication **08.24**



- Provides bubble-tight shut off up to 16Bar
- Designed for precise disc positioning, low torque, ease of operation and long life cycle
- Epoxy coated body
- Sizes from 60.3–323.9mm

Size	Dimensions								Approx. Weight Each kg	Flow Coefficient@ (Fully Open) K <sub>v</sub> Values
	Nominal Size mm	C mm	D mm	L <sub>1</sub> mm	L <sub>2</sub> mm	W mm	H <sub>1</sub> mm	H <sub>2</sub> mm		


#### GEAR OPERATOR

60.3	57	60	190	127	81	153	71	95	5.8	110
73.0	68	73	190	127	96	169	85	125	6.5	190
76.1	72	76	190	127	96	169	85	125	6.8	190
88.9	84	89	190	127	96	175	91	125	7.0	290
114.3	109	114	190	127	115	208	109	125	8.5	590
139.7	135	140	245	127	132	229	131	225	11.9	1040
141.3	136	141	245	127	132	229	131	225	12.1	1040
165.1	160	165	245	127	132	243	145	225	12.8	1730
168.3	163	168	225	127	132	243	145	225	13.6	1730
219.1	214	219	295	167	147	268	170	225	20.8	3720
273.0	267	273	295	167	159	314	195	225	31.4	5800
323.9	318	324	295	167	165	342	242	225	34.3	8300

#### LEVER LOCK HANDLE

60.3	57	60	270	—	81	118	70	—	2.7	110
73.0	68	73	270	—	96	134	84	—	3.4	190
76.1	72	76	270	—	96	134	84	—	3.7	190
88.9	84	89	270	—	96	140	90	—	3.9	290
114.3	109	114	270	—	115	173	106	—	5.4	590
139.7	135	140	350	—	132	203	130	—	8.6	1040
141.3	136	141	350	—	132	203	130	—	8.8	1040
165.1	160	165	350	—	132	217	144	—	9.6	1730
168.3	163	168	350	—	132	217	144	—	10.3	1730

@ K<sub>v</sub> values for flow of water at +16°C/60°F with valve fully open.

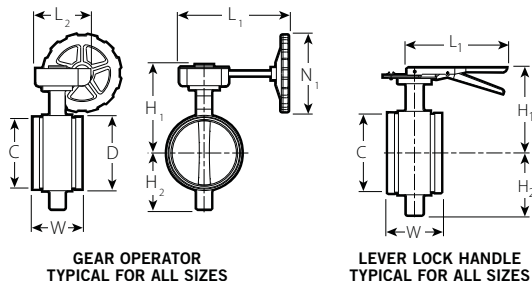

GEAR OPERATOR  
TYPICAL FOR ALL SIZES

LEVER LOCK HANDLE  
TYPICAL FOR ALL SIZES

# Valves – Butterfly Valves

## Butterfly Valve

### SERIES 700


For Complete Information  
Request Publication **08.05**



- Designed for bubble-tight shut-off for pressure rated up to 1400kPa/200psi
- Narrow disc design for low pressure drop performance
- Self-centering for positive shut-off
- Available with EPDM for water services to +230°F/+110°C
- Nitrile for oil services to 180°F/+82°C liners
- Body is fully rubber lined, standard disc is aluminum bronze (also available in 316 stainless steel)
- Lockable feature sizes 40–150mm/1½–6" and 165.1 mm

#### STANDARD PROFILE BFV

Size		Dimensions					Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	A	B	D	G	K	kg Lbs.
40 1½	48.3 1.900	92.2 3.63	85.9 3.38	41.4 1.63	139.7 5.50	112.8 4.44	1.3 2.8
50	60.3 2.375	103.1 4.06	81.0 3.19	47.5 1.87	139.7 5.50	119.6 4.71	1.5 3.3
65 2½	73.0 2.875	123.7 4.87	96.8 3.81	63.5 2.50	177.8 7.00	134.9 5.31	2.9 6.4
80 3	88.9 3.500	142.7 5.62	96.8 3.81	69.9 2.75	177.8 7.00	142.7 5.62	3.1 6.8
100 4	114.3 4.500	177.8 7.00	115.8 4.56	88.9 3.50	228.6 9.00	179.9 6.69	5.5 12.1
125 5	141.3 5.563	215.9 8.50	147.6 5.81	101.6 4.00	304.8 12.00	209.6 8.25	11.8 26.1
150 6	168.3 6.625	241.3 9.50	147.6 5.81	114.3 4.50	304.8 12.00	223.0 8.78	14.7 32.5
165.1 mm	165.1 6.500	241.3 9.50	147.6 5.81	114.3 4.50	304.8 12.00	223.0 8.78	13.8 30.5

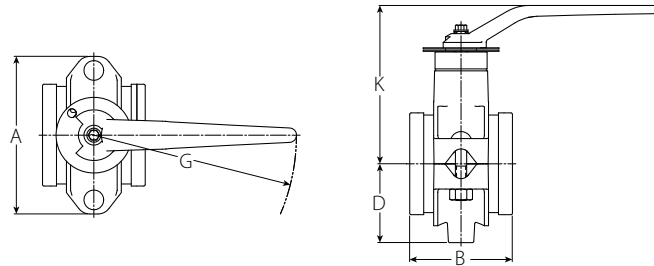


40 – 150 mm/1½–6" sizes (Typical)

# Valves – Butterfly Valves

## Butterfly Valve

### SERIES 706

For Complete Information  
Request Publication 08.17

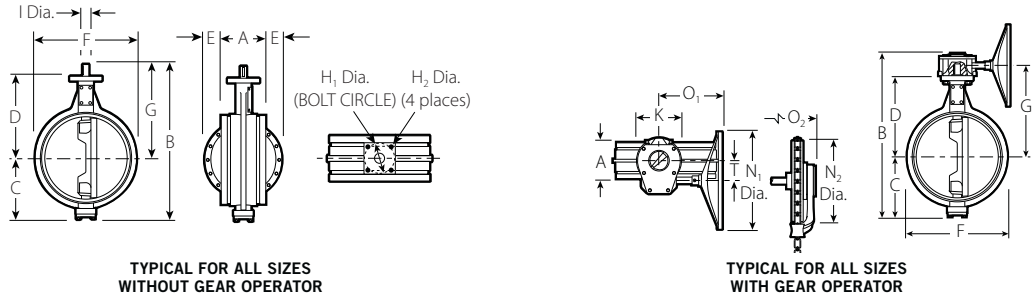

SERIES 706 BUTTERFLY VALVE WITHOUT GEAR OPERATOR

Size		Dimensions										Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Diameter mm Inches	A End to End mm Inches	B Overall Height mm Inches	C mm Inches	D mm Inches	E mm Inches	F mm Inches	G mm Inches	Mounting †			w/o Oper. kg Lbs.
									H <sub>1</sub> Dia. mm Inches	H <sub>2</sub> Dia. mm Inches	I Dia. mm Inches	
350 14	355.6 14.000	178 7.00	621 24.45	246 9.68	327 12.89	68 2.66	406 16.00	375 14.77	127 5.00	14 0.563	35 1.38	56.7 125.0
	377.0 14.843	254 10.00	621 24.45	246 9.68	327 12.89	29 1.16	406 16.00	375 14.77	126 4.96	15 0.578	35 1.38	56.7 125.0
400 16	406.4 16.000	178 7.00	689 27.14	278 10.94	358 14.10	93 3.66	457 18.00	412 16.20	127 5.00	14 0.563	38 1.50	69.4 153.0
	426.0 16.772	267 10.50	689 27.14	278 10.94	358 14.10	48 1.90	457 18.00	412 16.20	126 4.96	15 0.578	38 1.50	69.4 153.0
450 18	457.0 18.000	203 8.00	751 29.56	313 12.31	381 15.00	105 4.15	508 20.00	438 17.25	127 5.00	14 0.563	45 1.75	90.3 199.0
	480.0 18.898	279 11.00	751 29.56	313 12.31	381 15.00	59 2.64	508 20.00	438 17.25	126 4.96	15 0.578	45 1.75	90.3 199.0
500 20	508.0 20.000	216 8.50	829 32.64	357 14.06	409 16.10	125 4.93	584 23.00	472 18.58	152 6.00	14 0.563	51 2.00	129.3 285.0
	530.0 20.866	292 11.50	829 32.64	357 14.06	409 16.10	87 3.42	584 23.00	472 18.58	140 5.51	17 0.672	51 2.00	129.3 285.0
600 24	610.0 24.000	254 10.00	988 38.89	408 16.06	511 20.10	157 6.18	678 26.70	580 22.83	152 6.00	14 0.563	57 2.25	204.6 451.0
	630.0 24.803	305 12.00	988 38.89	408 16.06	511 20.10	131 5.17	678 26.70	580 22.83	165 6.50	21 0.844	57 2.25	204.6 451.0

- Easier to install than cumbersome multi-bolt wafer, lug type or flange valves
- Available with gear operator or electric, pneumatic and hydraulic actuators
- Pressure rated up to 2065 kPa/300 psi
- Sizes from 350–630 mm/14–24"
- Not compatible with Advance Groove System components

#### IMPORTANT NOTE:

Dimensions provided without operator are for sizing data only. Series 706 butterfly valves should never be installed without operators.

† Mounting Key: 350 mm/14" – 3/8 Sq. x 1 1/8; 400 mm/16" – 3/8 Sq. x 2 1/2; 450 mm/18" – (2) 3/8 Sq. x 2; 500 mm/20" – (2) 1/2 Sq. x 2 1/4; 600 mm/24" – (2) 5/8 Sq. x 3

SERIES 706 BUTTERFLY VALVE WITH GEAR OPERATOR

Size		Dimensions										No. Turns to Close	Approx. Wgt. Each kg Lbs.	Flow Coefficient@ (Fully Open) K <sub>v</sub> Values C <sub>v</sub> Values
Nominal Size mm Inches	Actual Outside Diameter mm Inches	A End to End mm Inches	B Overall Height mm Inches	G mm Inches	K mm Inches	Handwheel		Chain Wheel		T mm Inches				
						N <sub>1</sub> Dia. mm Inches	O <sub>1</sub> mm Inches	N <sub>2</sub> Dia. mm Inches	O <sub>2</sub> mm Inches					
350 14	355.6 14.000	178 7.00	657 25.86	367 14.44	152 6.00	356 14.00	217 8.56	394 15.50	318 12.50	77 3.02	6.75	68.9 152.0	8096.4 9360	
	377.0 14.843	254 10.00	665 26.17	367 14.54	200 7.87	500 19.70	327 12.86	546 21.50	406 16.00	77 3.02	9.5	70.8 156.0	8096.4 9360	
400 16	406.4 16.000	178 7.00	723 28.45	403 15.85	178 7.00	457 18.00	259 10.20	394 15.50	318 12.50	86 3.38	7.75	84.8 187.0	10726.0 12400	
	426.0 16.772	267 10.50	737 29.00	406 15.99	220 8.66	500 19.70	364 14.34	546 21.50	444 17.47	86 3.38	13.75	91.2 201.0	10726.0 12400	
450 18	457.0 18.000	203 8.00	787 31.00	429 16.87	229 9.00	457 18.00	259 10.20	394 15.50	287 11.31	111 4.38	11	116.6 257.0	13753.5 15900	
	480.0 18.898	279 11.00	817 32.17	436 17.17	285 11.22	700 27.60	395 15.55	762 30.00	474 18.68	111 4.38	21	122.2 269.5	13753.5 15900	
500 20	508.0 20.000	216 8.50	864 34.01	456 17.97	275 10.82	610 24.00	300 11.82	394 15.50	313 12.31	137 5.38	11	161.0 355.0	17127.0 19800	
	530.0 20.866	292 11.50	920 36.23	464 18.27	285 11.22	700 27.60	468 18.43	762 30.00	549 21.60	137 5.38	52	174.3 384.2	17127.0 19800	
600 24	610.0 24.000	254 10.00	1016 40.01	558 21.97	275 10.82	610 24.00	300 11.82	394 15.50	313 12.31	137 5.38	18	236.8 522.0	24998.5 28900	
	630.0 24.803	305 12.00	1017 42.41	569 22.42	370 14.57	700 27.60	521 20.51	762 30.00	599 23.60	137 5.38	79.25	274.4 605.0	24998.5 28900	

@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/+60°F with valve fully open.



# Valves – Triple Service Valves

## Triple Service Valve Assembly

For Complete Information Request Publication **08.09**



- Victaulic tri-service valves provide shut-off, throttling and non-slam check service in a single assembly
- Series 779 check valve features a venturi-like inlet that is drilled, tapped, and plugged to receive flow-measuring taps
- The 779 check valve can be combined with either the Vic-300 MasterSeal butterfly valve or the Series 377 Vic-Plug balancing valve
- For 65–80 mm/2½–3" configurations use a Series 716 check valve
- Both configurations are available with memory stop
- Working pressures for the 65–300 mm/2½–12" butterfly/check combination are 2065 kPa/300 psi and 1200 kPa/175 psi for the 80–300 mm/3–12" plug/check combination

### TRIPLE SERVICE BUTTERFLY/CHECK VALVE ASSEMBLY

Size		Dimensions				Approx. Weight Each	
Nominal Size mm Inches	Actual Outside Diameter mm Inches	Center to Top		Center to Bottom mm Inches	End to End mm Inches	Manual Handle kg Lbs.	Gear Operator kg Lbs.
		Handle mm Inches	Gear mm Inches				
65 2½	73.0 2.875	143 5.62	170 6.72	54 ‡ 2.13	197 7.75	5.3 11.6	5.8 12.7
80 3	88.9 3.500	143 5.62	178 7.02	64 ‡ 2.50	206 8.12	6.1 13.5	6.6 14.6
100 4	114.3 4.500	193 7.62	205 8.08	102 4.00	365 14.38	16.8 37.0	18.2 40.1
125 5	141.3 5.563	206 8.12	218 8.60	117 4.62	419 16.50	23.6 52.0	25.0 55.0
150 6	168.3 6.625	219 8.62	269 10.58	127 5.00	444 17.50	31.3 69.0	32.7 72.0
200 8	219.1 8.625	267 10.50	318 12.50	155 6.12	495 19.50	56.7 125.0	56.7 125.0
250 10	273.0 10.750	—	357 14.05	182 7.18	597 23.50	—	84.8 187.0
300 12	323.9 12.750	—	390 15.37	206 8.12	663 26.12	—	117.9 260.0


‡ Based on Style 77 couplings. When using Style 07 dimensions are 49 mm/1.94" for 65 mm/2½" size and 57 mm/2.25" for 80 mm/3" size.

### TRIPLE SERVICE PLUG/CHECK VALVE ASSEMBLY

Size		Dimensions				Approx. Weight Each	
AWWA Nominal Size mm Inches	AWWA Outside Diameter mm Inches	Center to Top		Center to Bottom mm Inches	End to End mm Inches	Manual Handle kg Lbs.	Gear Operator kg Lbs.
		Handle mm Inches	Gear mm Inches				
80 3	100.6 3.96	210 8.25	315 12.38	95 3.75	311 12.25	18.1 40.0	22.7 50.0
100 4	121.9 4.80	222 8.75	327 12.87	113 4.44	473 18.62	27.2 60.0	31.8 70.0
150 6	175.3 6.90	254 10.00	349 13.75	141 5.56	559 22.00	49.9 110.0	59.0 130.0
200 8	229.9 9.05	—	434 17.10	175 6.87	648 25.50	81.6 180.0	95.3 210.0
250 10	281.9 11.10	—	575 22.63	203 8.00	762 30.00	—	139.3 307.0
300 12	335.3 13.20	—	622 24.50	241 9.50	851 33.50	—	186.9 412.0


#### Important Note:

For connecting Vic-Plug valve to Vic-check valve or IPS steel pipe (80–300 mm/3–12"), refer to Style 307 Transition coupling in 23.03.




Typical 65–80 mm/  
2½–3" sizes

Vic-300 MasterSeal butterfly valve and Series 716 Vic-Check valve and Style 07 coupling




Typical 100–300 mm/  
4–12" Sizes

Vic-300 MasterSeal gear operator butterfly valve and Series 712 or 779 Vic-Check valve and Style 07 coupling



Typical 80 mm/3" Size

Series 377 Vic-Plug with manual handle, Series 716 Vic-Check valve, and Style 307 coupling



Typical 100–300 mm/  
4–12" Sizes

Series 377 Vic-Plug with gear operator, Series 779 Vic-Check valve, and Style 307 coupling

**IMPORTANT Note:** Assembly required with either Style 07 Zero-Flex rigid couplings or Style 77 standard flexible couplings.

# Valves – Check Valves

## Vic Check Valve

### SERIES 716

For Complete Information  
Request Publication **08.08**



TYPICAL 65–80 mm/2½–3" SIZES



TYPICAL 100–300 mm/4–12" SIZES


- Utilizes spring-assisted, single-disc design
- Achieves a leak-free seal with as little as 1.5m/5 ft. of head
- Installed in horizontal and vertical positions (upward flow only)
- Vic-Check valves combine high pressure capabilities with low pressure drop performance
- The grooved end design permits fast, easy installation
- Drains are provided both upstream and downstream of the disc
- Every valve factory tested to its working pressure rated up to 2065kPa/300psi
- Sizes from 65–300mm/2½–12"
- AGS Series W715 check valve available for sizes 350–600mm/14–24", see pg. 5-10

Size		Dimensions										Approx. Wgt. Each	Flow Coefficient@ (Fully Open)
Nominal Size mm Inches	Actual Outside Diameter mm Inches	A End to End mm Inches	B Overall Width mm Inches	C mm Inches	D mm Inches	E mm Inches	J mm Inches	K mm Inches	P mm Inches	R mm Inches	kg Lbs.	K <sub>v</sub> Values C <sub>v</sub> Values	
65 2½	73.0 2.875	99 3.88	108 4.25	91 3.60	—	—	—	—	—	—	1.6 3.6	121.1 140	
76.1 mm	76.1 3.000	99 3.88	108 4.25	91 3.60	—	—	—	—	—	—	1.6 3.6	121.1 140	
80 3	88.9 3.500	108 4.25	129 5.06	106 4.19	—	—	—	—	—	—	2.0 4.5	216.3 250	
100 4	114.3 4.500	245 9.63	152 6.00	99 3.90	70 2.75	89 3.50	51 2.00	114 4.50	89 3.50	85 3.35	7.3 16.0	337.4 390	
139.7 mm	139.7 5.500	267 10.50	173 6.80	114 4.50	106 4.17	106 4.17	55 2.15	149 5.88	104 4.08	102 4.02	12.3 27.0	605.5 700	
125 5	141.3 5.563	267 10.50	173 6.80	114 4.50	106 4.17	106 4.17	55 2.15	149 5.88	104 4.08	102 4.02	9.1 20.0	605.5 700	
165.1 mm	165.1 6.500	292 11.50	203 8.00	127 5.00	114 4.50	114 4.50	61 2.38	169 6.67	120 4.73	99 3.89	12.7 28.0	865.0 1000	
150 6	168.3 6.625	292 11.50	203 8.00	127 5.00	114 4.50	114 4.50	61 2.38	169 6.67	120 4.73	99 3.89	12.7 28.0	865.0 1000	
200 8	219.1 8.625	356 14.00	251 9.88	155 6.10	128 5.05	144 5.65	55 2.15	222 8.75	145 5.70	146 5.75	18.1 40.0	1157.0 1800	
250 10	273.0 10.750	432 17.00	305 12.00	180 7.10	151 5.96	170 6.69	55 2.15	277 10.92	176 6.93	—	45.4 100.0	2595.0 3000	
300 12	323.9 12.750	495 19.50	356 14.00	206 8.10	176 6.91	194 7.64	64 2.51	325 12.81	201 7.93	—	63.5 140.0	3633.0 4200	
350 – 600 14 – 24		AGS™ See AGS Series W715 Check Valve, pg. 5-10											


@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/60°F with valve fully open.

#### IMPORTANT NOTES:

Placement of check valves too close to sources of unstable flow will shorten the life of the valve and potentially may damage the system. To extend valve life, valves should be installed a reasonable distance downstream from pumps, elbows, expanders, reducers or other similar devices. Sound piping practices dictate a minimum of five (5) times the pipe diameter for general use. Distances between three (3) and five (5) diameters are allowable provided the flow velocity is less than eight (8) ft. per second (2.4 mps). Distances less than three (3) diameters are not recommended and will violate the Victaulic product warranty.




TYPICAL 65–80 mm/2½–3" SIZES



TYPICAL 100–200 mm/4–8" SIZES

- 1 15 mm NPT\* Upstream drain (optional)
- 2 15 mm NPT\* downstream drain (optional)
- 3 50.8 mm NPT\* drain (optional)



TYPICAL 250–300 mm/10–12" SIZES

- 1 15 mm NPT\* Upstream drain (optional)
- 2 15 mm NPT\* downstream drain (optional)

\* Available with British Standard Pipe Threads, specify "BSP" clearly on order.

# Valves – Check Valves

## Venturi Check Valve

### SERIES 779

For Complete Information  
Request Publication **08.10**




- CAD-designed hydrodynamic inlet profile provides a natural venturi as part of the valve
- Inlet is drilled, tapped, and plugged, ready to receive the flow kit
- Venturi provides much greater measurement accuracy, valve turbulence and interference across the valve seat is negligible
- Twin taps on both sides provide positioning of measurement outlets for convenient meter connection and accurate flow measurement independent of the Style of throttling valve or the position of the throttling element (ball, plug, disc, etc.)
- All sizes can be installed in horizontal and vertical positions (upward flow only)
- Provides leak-free sealing under conditions as low as 1.5m/5ft. of head pressure
- Every valve is factory tested and pressure rated up to 2065kPa/300psi
- Sizes from 100–300mm/4–12"

Size		Dimensions										Approx. Wgt. Each	Flow Coefficient@ (Fully Open)
Nominal Size mm Inches	Actual Outside Diameter mm Inches	A End to End mm Inches	B mm Inches	C mm Inches	D mm Inches	E mm Inches	F mm Inches	G mm Inches	K mm Inches	P mm Inches	kg Lbs.	K <sub>v</sub> Values C <sub>v</sub> Values	
100 4†	114.3 4.500	245 9.63	149 5.88	99 3.88	70 2.75	89 3.50	38 1.50	60 2.38	114 4.50	89 3.50	7.3 16.0	337.4 390	
125 5†	141.3 5.563	267 10.50	171 6.75	114 4.50	108 4.25	108 4.25	42 1.65	60 2.38	149 5.88	104 4.08	9.1 20.0	605.5 700	
139.7mm†	139.7 5.500	267 10.50	171 6.75	114 4.50	108 4.25	108 4.25	42 1.65	60 2.38	149 5.88	104 4.08	9.1 20.0	605.5 700	
165.1mm†	165.1 6.500	292 11.50	203 8.00	127 5.00	114 4.50	114 4.50	40 1.58	68 2.68	170 6.68	121 4.75	12.7 28.0	865.0 1000	
150 6†	168.3 6.625	292 11.50	203 8.00	127 5.00	114 4.50	114 4.50	40 1.58	68 2.68	170 6.68	121 4.75	12.7 28.0	865.0 1000	
200 8*	219.1 8.625	356 14.00	251 9.88	154 6.06	129 5.06	144 5.68	44 1.75	83 3.25	226 8.88	146 5.75	18.1 40.0	1557.0 1800	
250 10*	273.0 10.750	432 17.00	305 12.00	181 7.12	152 6.00	170 6.68	46 1.82	100 3.94	278 10.94	176 6.94	45.4 100.0	2595.0 3000	
300 12*	323.9 12.750	495 19.50	356 14.00	205 8.06	176 6.91	195 7.68	46 1.82	84 3.32	326 12.82	201 7.93	63.5 140.0	3633.0 4200	


† Port "L" located 45° off center line of valve body.

\* Both ports on center line of valve body.


@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/60°F with valve fully open.



TYPICAL 100 mm/4" SIZES



TYPICAL 125–165.1 mm/5–6" SIZES



TYPICAL 200–300 mm/8–12" SIZES

# Valves – Check Valves

## Swinger® Swing Check Valve

### SERIES 712 SERIES 713

For Complete Information  
Request Publication **08.11**



SERIES 712



SERIES 713


### SERIES 712

Size		Max. Work Pressure kPa psi	Dimensions					Approx. Wgt. Each kg Lbs.	Flow Coefficient@ (Fully Open) K <sub>v</sub> Values C <sub>v</sub> Values
Nominal Size mm Inches	Actual Outside Dia. mm Inches		A End to End mm Inches	C mm Inches	D mm Inches	E mm Inches	F mm Inches		
50 2	60.3 2.375	2065 300	229 9.00	46 1.81	124 4.88	111 4.38	162 6.38	55.3 11.6	67.5 78
65 2½	73.0 2.875	2065 300	235 9.25	57 2.25	140 5.50	145 5.69	195 7.69	8.2 18.0	108.1 125
80 3	88.9 3.500	2065 300	273 10.75	64 2.50	146 5.75	159 6.25	229 9.00	10.2 22.5	181.7 210
100 4	114.3 4.500	2065 300	305 12.00	86 3.38	194 7.63	202 7.96	273 10.75	17.2 38.0	309.7 358


### SERIES 713

50 2	60.3 2.375	6900 1000	229 9.00	46 1.81	4.69 4.88	119 4.96	172 6.75	5.4 12.0	67.5 78
---------	---------------	--------------	-------------	------------	--------------	-------------	-------------	-------------	------------

@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/60°F with valve fully open.



SERIES 712  
TYPICAL 50–100 mm/2–4" SIZES



SERIES 713  
TYPICAL 50 mm/2" SIZE

- Designed for use with standard Victaulic grooved fittings and couplings
- Large closure access bonnet permits easy internal coating for corrosive services
- 316 stainless steel clapper features a bonded disc for coating protection
- Series 712 and Series 713 should not be installed in vertical pipelines

#### SERIES 712:

- Pressure rated up to 2065 kPa/300 psi
- Sizes from 50–100 mm/2–4"

#### SERIES 713:

- Can be used with high pressure lines rated up to 6900 kPa/1000 psi
- Size for 50 mm/2" only

# Valves – Ball Valves

## Brass Body Ball Valve

### SERIES 722

For Complete Information  
Request Publication **08.15**




- Standard port, female threaded end ball valve
- Constructed from forged brass
- Pressure rated up to 4135 kPa/600psi WOG service
- Sizes from 8–50mm/¼–2"

Size		Dimensions				Approx. Weight Each	Flow Coefficient@ (Fully Open) K <sub>v</sub> Values C <sub>v</sub> Values
Nominal Size mm Inches	Actual Outside Dia. mm Inches	A mm Inches	B mm Inches	C mm Inches	F mm Inches		
8 ¼	13.7 0.540	39 1.54	20 0.77	26 1.03	42 1.65	0.09 0.2	6.1 7
10 ¾	17.1 0.675	45 1.77	22 0.88	33 1.28	78 3.07	0.14 0.3	6.1 7
15 ½*	21.3 0.834	54 2.13	27 1.06	34 1.33	78 3.07	0.18 0.4	8.7 10
20 ¾*	26.7 1.050	62 2.44	31 1.22	45 1.79	96 3.78	0.32 0.7	21.6 25
25 1*	33.4 1.315	75 2.95	37 1.48	50 1.95	96 3.78	0.45 1.0	32.0 37
32 1¼*	42.2 1.660	84 3.31	42 1.65	55 2.17	96 3.78	0.68 1.5	43.3 50
40 1½*	48.3 1.900	93 3.66	46 1.83	68 2.68	138 5.43	0.95 2.1	75.3 87
50 2*	60.3 2.375	107 4.21	53 2.11	73 2.89	138 5.43	1.09 2.4	95.2 110

@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/60°F with valve fully open.

\* Valve sizes 15 mm/½" and above are UL Listed at 1200 kPa/175 psi and FM Approved at 4135 kPa/600 psi for 15 mm/½" and 20 mm/¾" sizes and 3450 kPa/500 psi for 25–50 mm/1–2" sizes.



TYPICAL FOR ALL SIZES

# Valves – Ball Valves

## Vic-Ball Valve

### SERIES 726


For Complete Information  
Request Publication 08.23




- High-pressure standard port ball valve with grooved ends
- Two-piece, end-entry valve
- Features floating ball for lower torque requirements
- NACE-MR-01-75 compliant
- Pressure rated up to 6900kPa/1000psi in sizes 40–80mm/1½–3"
- Pressure rated up to 5515kPa/800psi for sizes 100–150mm/4–6"
- Sizes from 40–150mm/1½–6"

Size		Dimensions												Approx. Wgt Each kg Lbs.	Flow Coefficient@ (Fully Open) K <sub>v</sub> Values C <sub>v</sub> Values
Nominal Size mm Inches	Actual Out. Dia. mm Inches	A mm Inches	B mm Inches	C mm Inches	D mm Inches	DA mm Inches	E mm Inches	F mm Inches	H mm Inches	J mm Inches	K mm Inches	L mm Inches			
40 1½	48.3 1.900	130 5.12	51 2.00	60 2.36	32 1.25	38 1.50	45 1.78	48 1.90	76 3.00	7 0.28	14 0.56	177 6.97	2.0 4.4	112.5 130	
50 2	60.3 2.375	140 5.50	67 2.64	63 2.48	38 1.50	51 2.00	57 2.25	60 2.38	84 3.31	9 0.34	14 0.56	177 6.97	3.0 6.5	155.7 180	
65 2½	73.0 2.875	159 6.25	77 3.03	71 2.80	50 1.97	64 2.50	69 2.72	73 2.88	102 4.00	9 0.34	14 0.56	250 9.84	4.7 10.4	294.1 340	
76.1 mm	76.1 3.000	159 6.25	77 3.03	71 2.80	50 1.97	64 2.50	69 2.72	73 2.88	102 4.00	9 0.34	14 0.56	250 9.84	4.7 10.4	294.1 340	
80 3	88.9 3.500	167 6.56	89 3.50	80 3.15	64 2.50	76 3.00	85 3.34	89 3.50	115 4.53	9 0.34	14 0.56	250 9.84	6.8 14.9	519.0 600	
100 4	114.3 4.500	210 8.25	—	85 3.35	76 2.99	102 4.00	111 4.33	115 4.52	139 5.48	9 0.34	15 0.61	398 15.67	18.9 41.5	562.3 650	
165.1 mm	165.1 6.500	257 10.10	—	115 4.53	102 4.00	152 6.00	164 6.46	169 6.64	165 6.48	9 0.34	15 0.61	459 18.07	35.7 78.5	692.0 800	
150 6	168.3 6.625	257 10.10	—	115 4.53	102 4.00	152 6.00	164 6.46	169 6.64	165 6.48	9 0.34	15 0.61	459 18.07	35.7 78.5	692.0 800	

@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/60°F with valve fully open.

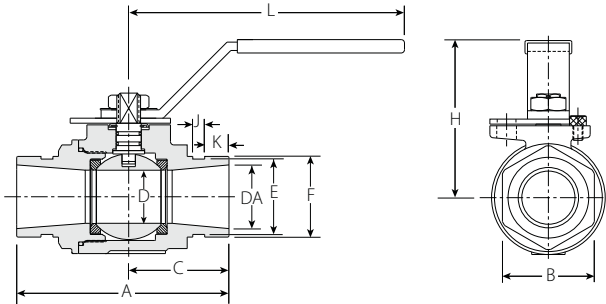

TYPICAL 40–80mm/1½–3" SIZES

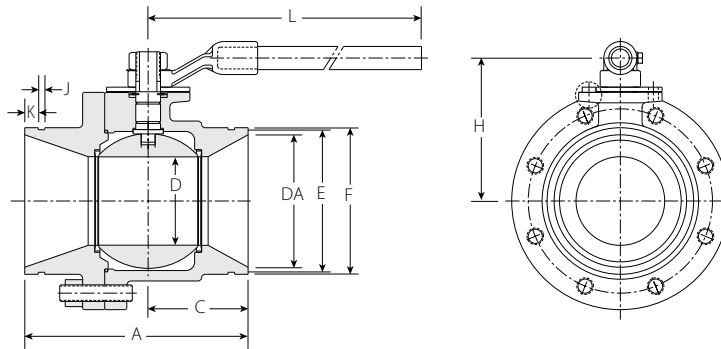

TYPICAL 100–150mm/4–6" SIZES

# Valves – Ball Valves

## Vic-Ball Valve (cont'd)


### SERIES 726 WITH GEAR OPERATOR

For Complete Information Request Publication **08.23**




Size		Dimensions						Approx. Wgt. Each	Flow Coefficient@ (Fully Open)
Nominal Size mm Inches	Actual Outside Dia. mm Inches	M mm Inches	N mm Inches	O mm Inches	P mm Inches	Q mm Inches	R mm Inches	kg Lbs.	K <sub>v</sub> Values C <sub>v</sub> Values
40 1½	48.3 1.900	153 6.03	109 4.29	40 1.58	100 3.94	92 2.64	44 1.75	3.2 7.1	112.5 130
50 2	60.3 2.375	160 6.30	109 4.29	40 1.58	100 3.94	92 2.64	44 1.75	4.1 9.1	155.7 180
65 2½	73.0 2.875	189 7.43	118 4.65	50 1.97	125 4.92	112 4.43	58 2.28	5.9 12.9	294.1 340
76.1 mm	76.1 3.000	189 7.43	118 4.65	50 1.97	125 4.92	112 4.43	58 2.28	5.9 12.9	294.1 340
80 3	88.9 3.500	202 7.94	118 4.65	50 1.97	125 4.92	112 4.43	58 2.28	9.1 20.0	519.0 600
100 4	114.3 4.500	253 9.95	118 4.65	50 1.97	125 4.92	112 4.43	58 2.28	20.3 44.7	562.3 650
165.1 mm	165.1 6.500	280 11.02	118 4.65	50 1.97	125 4.92	112 4.43	58 2.28	40.3 89.0	692.0 800
150 6	168.3 6.625	280 11.02	118 4.65	50 1.97	125 4.92	112 4.43	58 2.28	40.3 89.0	692.0 800

@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/60°F with valve fully open.

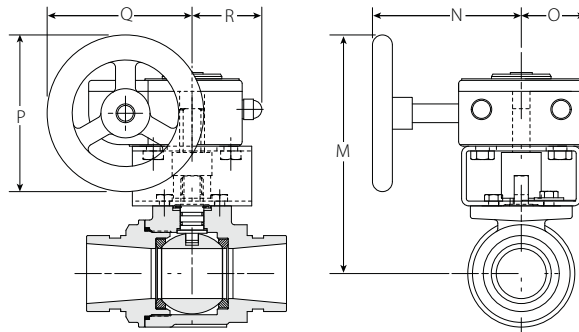

TYPICAL 40–80 mm/1½–3" SIZES

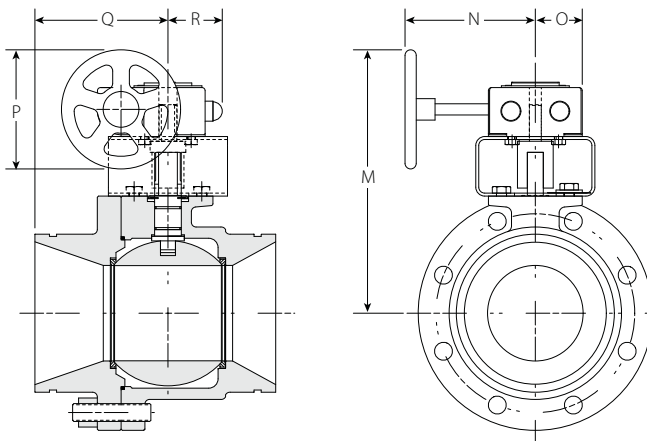

TYPICAL 100–150 mm/4–6" SIZES

# Valves – Plug Valves

## Vic-Plug Balancing Valve

### Series 377

For Complete Information  
Request Publication 08.12



### VALVE DIMENSIONS

Size		Dimensions										Approx. Wgt. Each		Flow Coefficient@ (Fully Open) K <sub>v</sub> Values C <sub>v</sub> Values
AWWA Nominal Size mm Inches	AWWA Outside Diameter mm Inches	A End to End mm Inches	C mm Inches	D mm Inches	F mm Inches	G mm Inches	H mm Inches	K mm Inches	M mm Inches	V mm Inches	Valve with Gear Operator kg Lbs.	Valve with Lever Handle kg Lbs.		
80 3*	100.6 3.96	203 8.00	95 3.75	108 4.25	167 6.56	—	102 4.00	51 2.00	102 4.00	470 18.50	14.5 32.0	14.5 32.0	519.0 600	
100 4*	121.9 4.80	229 9.00	113 4.44	121 4.75	197 7.74	—	114 4.50	51 2.00	102 4.00	470 18.50	19.1 42.0	17.7 39.0	899.6 1040	
150 6*	175.3 6.90	267 10.50	140 5.50	191 7.50	262 10.32	—	133 5.25	51 2.00	—	470 18.50	36.3 80.0	33.6 74.0	1816.5 2100	
200 8	229.9 9.05	292 11.50	175 6.87	274 10.80	312 12.30	416 16.38	145 5.75	—	—	—	55.0 120.0	—	3330.3 3850	
250 10	281.9 11.10	330 13.00	203 8.00	305 12.00	375 14.78	476 18.75	165 6.50	—	—	—	84.0 185.0	—	4757.5 5500	
300 12	335.3 13.20	356 14.00	241 9.50	349 13.75	432 17.00	533 21.00	178 7.00	—	—	—	109.0 240.0	—	7266.0 8400	


\* 80 mm/3", 100 mm/4", 150 mm/6" valves do not include side support lugs.

@ C<sub>v</sub>/K<sub>v</sub> values for flow of water at +60°F/16°C with valve fully open.

### Important NOTE:


Gear operators can be installed in various positions, contact Victaulic for details.

- Only eccentric grooved end plug valve made specifically for throttling services
- Cast of ductile iron and coated with alkyd enamel
- Eccentric design assures shut-off sealing up to 1200kPa/175psi on 80–300mm/3–12"
- For 80–300mm/3–12" systems Victaulic Style 307 Transition couplings are available to directly connect Vic-Plug valves to grooved end steel and other IPS pipe—refer to Publication 23.03 for details

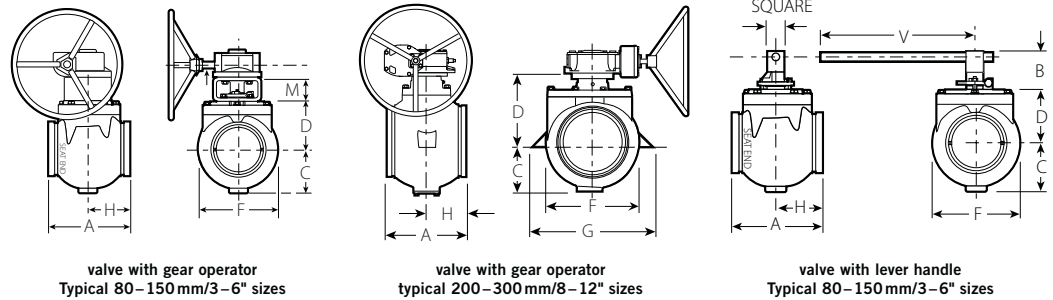

### GEAR OPERATOR DIMENSIONS

Gear Oper. Style No.	Dimensions										Turns to Close No.	Approx. Wgt. Each kg Lbs.
	J mm Inches	L mm Inches	N Dia. mm Inches	O mm Inches	P mm Inches	Q mm Inches	R Dia. mm Inches	S mm Inches	T mm Inches	U Dia. mm Inches		
MX	121 4.76	53 2.07	152 6.00	102 4.00	29 1.13	33 1.30	16 0.63	102 4.00	50 1.95	5 0.19	7.5	3.4 7.5
MZ	140 5.50	67 2.62	250 10.00	127 5.00	32 1.25	33 1.30	16 0.63	114 4.50	60 2.36	5 0.19	7.5	6.8 15.0
MV	184 7.25	84 3.29	457 18.00	229 9.00	41 1.62	57 2.25	22 0.88	152 6.00	67 2.63	6 0.25	7.8	9.1 20.0
MA	209 8.24	90 3.55	457 18.00	254 10.00	45 1.75	57 2.25	22 0.88	178 7.00	86 3.38	6 0.25	7.8	15.0 33.0
MC	283 11.12	102 4.03	457 18.00	264 10.38	48 1.87	57 2.25	25 1.00	188 7.38	137 5.38	6 0.25	18	30.8 68.0

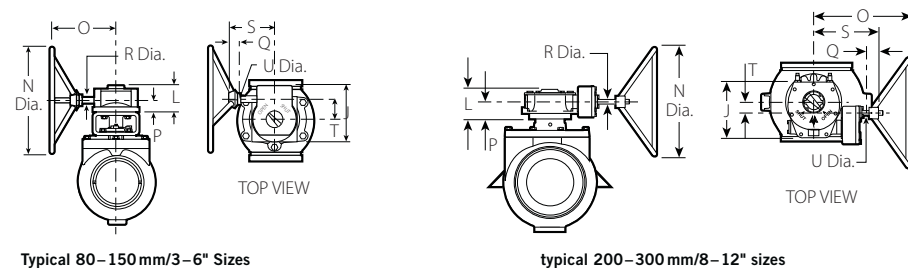





# Accessories

- Victaulic offers a complete line of accessories for equipment protection, special applications and flow measurement
- The Victaulic line of suction diffusers and strainers reduces maintenance downtime and allows easy access to the system
- Victaulic expansion joints accommodate expansion and contraction to meet system requirements
- To ensure system flow requirements are being met, Victaulic offers a line of flow measuring devices that are easy to install and simple to use

## Advanced Groove System **AGS™**



For 350–600mm/14–24" piping systems Victaulic offers Advanced Groove System (AGS) products, see pg. 5-1.

### Suction Diffuser

**SERIES 731-D**  
ANSI CLASS 150, PG. 4-3  
PN10/PN16 FLANGE, PG. 4-4  
GB FLANGE, PG. 4-5  
JIS 10K FLANGE, PG. 4-6  
AUSTRALIAN FLANGE, PG. 4-7  
**AGS SERIES W731-I, PG. 5-16**



### Vic-Strainer® – Tee Type

**SERIES 730, PG. 4-8**  
**AGS SERIES W730, PG. 5-17**



### Vic-Strainer – Wye Type

**SERIES 732, PG. 4-9**  
**AGS SERIES W732, PG. 5-18**



### Mover® Expansion Joint

**STYLE 150, PG. 4-10**



### Standard Expansion Joint

**STYLE 155, PG. 4-11**



### Dielectric Waterway Fitting

**STYLE 47, PG. 4-12**



# Accessories

## Faster, easier maintenance

Victaulic grooved accessories allow fast, easy maintenance of the system by reducing down time. Simply remove one nut and bolt, then the closure cap and basket. In a matter of minutes the basket can be cleaned and reinstalled so the system is quickly back in service.



Remove one nut and bolt to access the system



Remove coupling and closure cap



Remove basket, clean, then reinstall

**NOTE:**

Always read and understand operating instructions before attempting installation or system maintenance.

**WARNING:**

Depressurize and drain the piping system before attempting to install, remove, or adjust any Victaulic piping products.

### PRODUCTS

- 1-12 Couplings
- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories**
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software

# Accessories


## Suction Diffuser with ANSI Class 150 Flange


### SERIES 731-D

For Complete Information Request Publication **09.20**



- Provides optimum flow conditions at the inlet side of the pump
- Equipped with a removable strainer and fine mesh sleeve
- Pipe support bosses provided to aid in proper alignment
- Plug is provided to allow easy draining of the system
- Simple removal of closure coupling speeds cleaning and maintenance
- Pressure rated up to 2065 kPa/300psi
- Sizes from 80×50 mm/3×2" through 300×300 mm/12×12"

Size		Dimensions – mm/Inches							Approx. Wgt. Each
System Side Grooved	Pump Side Flange ANSI Class 150	Nominal Size mm/Inches	L	L <sub>1</sub>	H <sub>1</sub>	H <sub>2</sub>	Thread Size	E	kg Lbs.
	× 65 2.5	279 11.00	160 6.30	140 5.51	93 3.70	1-11.5 NPT	190 7.48	11.8 26.0	
	× 80 3	279 11.00	160 6.30	140 5.51	101 4.00	1-11.5 NPT	190 7.48	12.6 27.7	
4 100	× 65 2.5	330 13.00	187 7.40	165 6.50	93 3.70	1-11.5 NPT	222 8.74	13.5 29.7	
	× 80 3	330 13.00	187 7.40	165 6.50	101 4.00	1-11.5 NPT	222 8.74	15.0 31.6	
	× 100 4	330 13.00	187 7.40	165 6.50	116 4.60	1-11.5 NPT	222 8.74	15.7 34.6	
5 125	× 80 3	381 15.00	213 8.40	191 7.52	101 4.00	1.25-11.5 NPT	250 9.84	21.0 46.2	
	× 100 4	381 15.00	213 8.40	191 7.52	116 4.60	1.25-11.5 NPT	250 9.84	22.4 49.4	
	× 125 5	381 15.00	213 8.40	191 7.52	130 5.10	1.25-11.5 NPT	250 9.84	23.7 52.3	
6 150	× 100 4	406 16.00	229 9.00	203 8.00	116 4.60	1.25-11.5 NPT	279 10.98	29.0 64.0	
	× 125 5	406 15.80	229 9.00	203 8.00	130 5.10	1.25-11.5 NPT	279 10.98	30.0 67.3	
	× 150 6	406 15.80	229 9.00	203 8.00	144 5.70	1.25-11.5 NPT	279 10.98	31.9 70.3	
8 200	× 125 5	483 19.00	260 10.20	229 9.02	130 5.10	1.25-11.5 NPT	318 12.52	44.7 98.5	
	× 150 6	483 19.00	260 10.20	229 9.02	144 5.70	1.25-11.5 NPT	318 12.52	46.3 102.1	
	× 200 8	483 19.00	260 10.20	229 9.02	172 6.80	1.25-11.5 NPT	318 12.52	50.2 110.7	
10 250	× 150 6	584 23.00	315 12.40	279 11.00	144 5.70	1.25-11.5 NPT	395 15.55	68.3 150.6	
	× 200 8	584 22.50	315 12.40	279 11.00	172 6.80	1.25-11.5 NPT	395 15.55	72.5 159.9	
	× 250 10	584 22.50	315 12.40	279 11.00	205 8.07	1.25-11.5 NPT	395 15.55	78.0 172.0	
12 300	× 200 8	686 27.00	392 15.43	335 13.19	172 6.75	1.25-11.5 NPT	472 18.58	111.3 245.4	
	× 250 10	686 26.84	392 15.43	335 13.19	205 8.07	1.25-11.5 NPT	472 18.58	118.1 260.3	
	× 300 12	686 26.84	392 15.43	335 13.19	241 9.50	1.25-11.5 NPT	472 18.58	123.9 273.2	
350 – 600 14 – 24		 See Style AGS Series W731-I, pg. 5-16, Request Publication 20.13							



3" – 12" / 80-300 MM SIZES

# Accessories

## Suction Diffuser with PN10/PN16 Flange


### SERIES 731-D

For Complete Information  
Request Publication **09.20**



- Provides optimum flow conditions at the inlet side of the pump
- Equipped with a removable strainer and fine mesh sleeve
- Pipe support bosses provided to aid in proper alignment
- Plug is provided to allow easy draining of the system
- Simple removal of closure coupling speeds cleaning and maintenance
- Pressure rated up to 2065 kPa/300 psi
- Sizes from DN80×DN50 mm through DN300×DN300 mm

Size		Dimensions – mm/inches						Approx. Wgt. Each
System Side Grooved	Pump Side Flange PN10/PN16	L	L <sub>1</sub>	H <sub>1</sub>	H <sub>2</sub>	Thread Size	E	kg Lbs.
76.1 mm	× 50 2	279 11.00	160 6.30	140 5.50	83 3.30	1-11 ISO 7-1	190 7.50	9.1 20.1
80 3	× 50 2	279 11.00	160 6.30	140 5.50	83 3.30	1-11 ISO 7-1	190 7.50	9.1 20.1
	76.1 mm	279 11.00	160 6.30	140 5.50	93 3.70	1-11 ISO 7-1	190 7.50	12.6 27.7
	80 3	279 11.00	160 6.30	140 5.50	101 4.00	1-11 ISO 7-1	190 7.50	12.6 27.7
100 4	× 76.1 mm	330 13.00	187 7.40	165 6.50	93 3.70	1-11 ISO 7-1	222 8.70	15.0 31.6
	80 3	330 13.00	187 7.40	165 6.50	101 4.00	1-11 ISO 7-1	222 8.70	15.0 31.6
	100 4	330 13.00	187 7.40	165 6.50	116 4.60	1-11 ISO 7-1	222 8.70	15.7 34.6
139.7 mm	× 76.1 mm	381 15.00	213 8.40	191 7.50	93 3.70	1.25-11 ISO 7-1	250 9.80	16.8 37.0
	80 3	381 15.00	213 8.40	191 7.50	101 4.00	1.25-11 ISO 7-1	250 9.80	19.1 42.0
	100 4	381 15.00	213 8.40	191 7.50	116 4.60	1.25-11 ISO 7-1	250 9.80	20.0 44.0
	139.7 mm	381 15.00	213 8.40	191 7.50	130 5.10	1.25-11 ISO 7-1	250 9.80	22.2 49.0
125 5	× 80 3	381 15.00	213 8.40	191 7.50	101 4.00	1.25-11 ISO 7-1	250 9.80	21.0 46.2
	100 4	381 15.00	213 8.40	191 7.50	116 4.60	1.25-11 ISO 7-1	250 9.80	22.4 49.4
	125 5	381 15.00	213 8.40	191 7.50	130 5.10	1.25-11 ISO 7-1	250 9.80	23.7 52.3
150 6	× 100 4	406 16.00	229 9.00	203 8.00	116 4.60	1.25-11 ISO 7-1	279 11.00	29.0 64.0
	139.7 mm	406 16.00	229 9.00	203 8.00	130 5.10	1.25-11 ISO 7-1	279 11.00	30.0 67.3
	125 5	406 16.00	229 9.00	203 8.00	130 5.10	1.25-11 ISO 7-1	279 11.00	30.0 67.3
	150 6	406 16.00	229 9.00	203 8.00	144 5.70	1.25-11 ISO 7-1	279 11.00	31.9 70.3
200 8	× 139.7 mm	483 19.00	260 10.20	229 9.00	130 5.10	1.25-11 ISO 7-1	318 12.50	44.7 98.5
	125 5	483 19.00	260 10.20	229 9.00	130 5.10	1.25-11 ISO 7-1	318 12.50	44.7 98.5
	150 6	483 19.00	260 10.20	229 9.00	144 5.70	1.25-11 ISO 7-1	318 12.50	46.3 102.1
	200 8	483 19.00	260 10.20	229 9.00	172 6.80	1.25-11 ISO 7-1	318 12.50	50.2 110.7
250 10	× 150 6	584 23.00	315 12.40	279 11.00	144 5.70	1.25-11 ISO 7-1	395 15.60	68.3 150.6
	200 8	584 23.00	315 12.40	279 11.00	172 6.80	1.25-11 ISO 7-1	395 15.60	72.5 159.9
	250 10	584 23.00	315 12.40	279 11.00	205 8.10	1.25-11 ISO 7-1	395 15.60	78.0 172.0
300 12	× 200 8	686 27.00	392 15.40	335 13.20	172 6.80	1.25-11 ISO 7-1	472 18.60	111.3 245.4
	250 10	686 27.00	392 15.40	335 13.20	205 8.10	1.25-11 ISO 7-1	472 18.60	118.1 260.3
	300 12	686 27.00	392 15.40	335 13.20	241 9.50	1.25-11 ISO 7-1	472 18.60	123.9 273.2



DN80 – DN300 MM SIZES

# Accessories

## Suction Diffuser with GB Flange


### SERIES 731-D

For Complete Information  
Request Publication **09.20**



- Provides optimum flow conditions at the inlet side of the pump
- Equipped with a removable strainer and fine mesh sleeve
- Pipe support bosses provided to aid in proper alignment
- Plug is provided to allow easy draining of the system
- Simple removal of closure coupling speeds cleaning and maintenance
- Pressure rated up to 2065 kPa/300 psi
- Sizes from DN80×DN50mm through DN300×DN300mm

Size		Dimensions – mm/inches						Approx. Wgt. Each
System Side Grooved	Pump Side Flange GB	L	L1	H <sub>1</sub>	H <sub>2</sub>	Thread Size	E	kg/Lbs.
×	×							
76.1 mm	50	279	160	140	83	1-11 ISO 7-1	190	9.1
	2	11.00	6.3	5.50	3.30		7.50	20.1
80	50	279	160	140	83	1-11 ISO 7-1	190	9.1
3	2	11.00	6.3	5.50	3.30		7.50	20.1
	76.1 mm	279	160	140	93	1-11 ISO 7-1	190	12.6
		11.00	6.3	5.50	3.70		7.50	27.7
	80	279	160	140	101	1-11 ISO 7-1	190	12.6
	3	11.00	6.3	5.50	4.00		7.50	27.7
100	76.1 mm	330	187	165	93	1-11 ISO 7-1	222	15.0
4		13.00	7.4	6.50	3.70		8.70	31.6
	80	330	187	165	101	1-11 ISO 7-1	222	15.0
	3	13.00	7.4	6.50	4.00		8.70	31.6
	100	330	187	165	116	1-11 ISO 7-1	222	15.7
	4	13.00	7.4	6.50	4.60		8.70	34.6
139.7 mm	76.1 mm	381	213	191	93	1.25-11 ISO 7-1	250	16.8
		15.00	8.4	7.50	3.70		9.80	37.0
	80	381	213	191	101	1.25-11 ISO 7-1	250	19.1
	3	15.00	8.4	7.50	4.00		9.80	42.0
	100	381	213	191	116	1.25-11 ISO 7-1	250	20.0
	4	15.00	8.4	7.50	4.60		9.80	44.0
	139.7 mm	381	213	191	130	1.25-11 ISO 7-1	250	22.2
		15.00	8.4	7.50	5.10		9.80	49.0
150	100	406	229	203	116	1.25-11 ISO 7-1	279	29.0
6	4	16.00	9.0	8.00	4.60		11.00	64.0
	139.7 mm	406	229	203	130	1.25-11 ISO 7-1	279	30.0
		16.00	9.0	8.00	5.10		11.00	67.3
	125	406	229	203	130	1.25-11 ISO 7-1	279	30.0
	5	16.00	9.0	8.00	5.10		11.00	67.3
	150	406	229	203	144	1.25-11 ISO 7-1	279	31.9
	6	16.00	9.0	8.00	5.70		11.00	70.3
200	139.7 mm	483	260	229	130	1.25-11 ISO 7-1	318	44.7
8		19.00	10.2	9.00	5.10		12.50	98.5
	125	483	260	229	130	1.25-11 ISO 7-1	318	44.7
	5	19.00	10.2	9.00	5.10		12.50	98.5
	150	483	260	229	144	1.25-11 ISO 7-1	318	46.3
	6	19.00	10.2	9.00	5.70		12.50	102.1
	200	483	260	229	172	1.25-11 ISO 7-1	318	50.2
	8	19.00	10.2	9.00	6.80		12.50	110.7
250	150	584	315	279	144	1.25-11 ISO 7-1	395	68.3
10	6	23.00	12.4	11.00	5.70		15.60	150.6
	200	584	315	279	172	1.25-11 ISO 7-1	395	72.5
	8	23.00	12.4	11.00	6.80		15.60	159.9
	250	584	315	279	205	1.25-11 ISO 7-1	395	78.0
	10	23.00	12.4	11.00	8.10		15.60	172.0
300	200	686	392	335	172	1.25-11 ISO 7-1	472	111.3
12	8	27.00	15.4	13.20	6.80		18.60	245.4
	250	686	392	335	205	1.25-11 ISO 7-1	472	118.1
	10	27.00	15.4	13.20	8.10		18.60	260.3
	300	686	392	335	241	1.25-11 ISO 7-1	472	123.9
	12	27.00	15.4	13.20	9.50		18.60	273.2



76.1 - 300 MM SIZES

# Accessories

## Suction Diffuser with JIS 10K Flange


### SERIES 731-D

For Complete Information Request Publication **09.20**



- Provides optimum flow conditions at the inlet side of the pump
- Equipped with a removable strainer and fine mesh sleeve
- Pipe support bosses provided to aid in proper alignment
- Plug is provided to allow easy draining of the system
- Simple removal of closure coupling speeds cleaning and maintenance
- Pressure rated up to 2065 kPa/300 psi
- Sizes from DN80A x DN50A mm through 318.5 x DN300A mm

Size		Dimensions –						Approx. Wgt. Each		
System Side Grooved	Pump Side Flange 10K	L	L <sub>1</sub>	H <sub>1</sub>	H <sub>2</sub>	Thread Size	E	kg Lbs.		
76.1 mm × 50A	2	279	160	140	83	1-11 ISO 7-1	190	9.1		
		11.00	6.30	5.50	3.30		7.50	20.1		
80A × 50A	2	279	160	140	83	1-11 ISO 7-1	190	9.1		
		11.00	6.30	5.50	3.30		7.50	20.1		
	76.1 mm	279	160	140	93	1-11 ISO 7-1	190	12.6		
		11.00	6.30	5.50	3.70		7.50	27.7		
80A × 80A	3	279	160	140	101	1-11 ISO 7-1	190	12.6		
		11.00	6.30	5.50	4.00		7.50	27.7		
		100A × 76.1 mm	330	187	165		93	1-11 ISO 7-1	222	15.0
80A × 3	13.00	7.40	6.50	4.00	8.70	31.6				
	100A × 4	13.00	7.40	6.50	4.60	8.70	34.6			
139.7 mm × 76.1 mm		381	213	191	93	1.25-11 ISO 7-1	250	16.8		
		15.00	8.40	7.50	3.70		9.80	37.0		
125A × 76.1 mm		381	213	191	93	1.25-11 ISO 7-1	250	16.8		
		15.00	8.40	7.50	3.70		9.80	37.0		
		80A × 3	381	213	191		101	1.25-11 ISO 7-1	250	21.0
		15.00	8.40	7.50	4.00		9.80		46.2	
		100A × 4	381	213	191		116		250	22.2
150A × 100A		15.00	8.40	7.50	4.60	9.80	49.0			
		125A × 5	381	213	191	130	1.25-11 ISO 7-1	250	23.7	
		15.00	8.40	7.50	5.10	9.80		52.3		
		150A × 4	406	229	203	116		1.25-11 ISO 7-1	279	29.0
		16.00	9.00	8.00	4.60	11.00	64.0			
150A × 139.7 mm		406	229	203	130	1.25-11 ISO 7-1	279	30.0		
		16.00	9.00	8.00	5.10		11.00	67.3		
		125A × 5	406	229	203		130	1.25-11 ISO 7-1	279	30.0
		16.00	9.00	8.00	5.10		11.00		67.3	
		150A × 6	406	229	203		144		279	31.9
200A × 139.7 mm		16.00	9.00	8.00	5.70	11.00	70.3			
		200A × 8	483	260	229	130	1.25-11 ISO 7-1	318	44.7	
		19.00	10.20	9.00	5.10	12.50		98.5		
		125A × 5	483	260	229	130	1.25-11 ISO 7-1	318	44.7	
		19.00	10.20	9.00	5.10	12.50		98.5		
150A × 6	483	260	229	144	318	46.3				
250A × 150A		19.00	10.20	9.00	5.70	12.50	102.1			
		200A × 8	483	260	229	172	1.25-11 ISO 7-1	318	50.2	
		19.00	10.20	9.00	6.80	12.50		110.7		
		250A × 6	584	315	279	144	1.25-11 ISO 7-1	395	68.3	
		23.00	12.40	11.00	5.70	15.60		150.6		
200A × 8	584	315	279	172	395	72.5				
300A × 200A		23.00	12.40	11.00	6.80	15.60	159.9			
		250A × 10	584	315	279	205	1.25-11 ISO 7-1	395	78.0	
		23.00	12.40	11.00	8.10	15.60		172.0		
300A × 250A		250A × 8	686	392	335	172	1.25-11 ISO 7-1	472	111.3	
		27.00	15.40	13.20	6.80	18.60		245.4		
		250A × 10	686	392	335	205		472	118.1	
300A × 300A		27.00	15.40	13.20	8.10	18.60	260.3			
		300A × 12	686	392	335	241	1.25-11 ISO 7-1	472	123.9	
		27.00	15.40	13.20	9.50	18.60		273.2		



DN350A – DN600A MM SIZES

# Accessories

## Suction Diffuser with Australian Standard Flange Table "E"

### SERIES 731-D


For Complete Information Request Publication 09.20



- Provides optimum flow conditions at the inlet side of the pump
- Equipped with a removable strainer and fine mesh sleeve
- Pipe support bosses provided to aid in proper alignment
- Plug is provided to allow easy draining of the system
- Simple removal of closure coupling speeds cleaning and maintenance
- Pressure rated up to 2065 kPa/300 psi
- Sizes from DN80A x DN50A mm through 318.5 x DN300A mm

Size		Dimensions – mm/inches						Approx. Wgt. Each
System Side Grooved	Pump Side Flange AS Table "E"	L	L1	H <sub>1</sub>	H <sub>2</sub>	Thread Size	E	kg/Lbs.
Millimeters/Inches								
76.1 mm × 2	50	279	160	140	83	1-11 ISO 7-1	190	9.1
	2	11.00	6.30	5.50	3.30		7.50	20.1
80 × 3	50	279	160	140	83	1-11 ISO 7-1	190	9.1
	2	11.00	6.30	5.50	3.30		7.50	20.1
	76.1 mm	279	160	140	93	1-11 ISO 7-1	190	12.6
	3	11.00	6.30	5.50	3.70		7.50	27.7
100 × 4	80	279	160	140	101	1-11 ISO 7-1	190	12.6
	3	11.00	6.30	5.50	4.00		7.50	27.7
	76.1 mm	330	187	165	93	1-11 ISO 7-1	222	15.0
4	13.00	7.40	6.50	3.70	8.70		31.6	
125 × 5	80*	381	213	191	101	1.25-11 ISO 7-1	250	20.0
	3	15.00	8.40	7.50	4.00		9.80	44.0
	100	381	213	191	116	1.25-11 ISO 7-1	250	22.2
4	15.00	8.40	7.50	4.60	9.80		49.0	
150 × 6	125	381	213	191	130	1.25-11 ISO 7-1	250	23.7
	5	15.00	8.40	7.50	5.10		9.80	52.3
	100*	406	229	203	116	1.25-11 ISO 7-1	279	29.0
	4	16.00	9.00	8.00	4.60		11.00	64.0
200 × 8	125	406	229	203	130	1.25-11 ISO 7-1	279	30.0
	5	16.00	9.00	8.00	5.10		11.00	67.3
	150	406	229	203	144	1.25-11 ISO 7-1	279	31.9
6	16.00	9.00	8.00	5.70	11.00		70.3	
250 × 10	125*	483	260	229	130	1.25-11 ISO 7-1	318	44.7
	5	19.00	10.20	9.00	5.10		12.50	98.5
	150	483	260	229	144	1.25-11 ISO 7-1	318	46.3
	6	19.00	10.20	9.00	5.70		12.50	102.1
300 × 12	200*	483	260	229	172	1.25-11 ISO 7-1	318	50.2
	8	19.00	10.20	9.00	6.80		12.50	110.7
	150*	584	315	279	144	1.25-11 ISO 7-1	395	68.3
	6	23.00	12.40	11.00	5.70		15.60	150.6
300 × 12	200*	584	315	279	172	1.25-11 ISO 7-1	395	72.5
	8	23.00	12.40	11.00	6.80		15.60	159.9
	250	584	315	279	205	1.25-11 ISO 7-1	472	78.0
	10	23.00	12.40	11.00	8.10		18.60	172.0
300 × 12	200*	686	392	335	172	1.25-11 ISO 7-1	472	111.3
	8	27.00	15.40	13.20	6.80		18.60	245.4
	250	686	392	335	205	1.25-11 ISO 7-1	472	118.1
	10	27.00	15.40	13.20	8.10		18.60	260.3
300 × 12	300	686	392	335	241	1.25-11 ISO 7-1	472	123.9
	12	27.00	15.40	13.20	9.50		18.60	273.2

\* Available with No. 50 Concentric Reducer and the appropriate coupling for additional size needs. Contact Victaulic for details.



3" – 12" / 80-300 MM SIZES



# Accessories

## Vic-Strainer – Tee Type

### SERIES 730

For Complete Information  
Request Publication **09.02**



- Series 730 Vic-Strainer is lighter than flanged "Y" type strainers and provides straight-through flow for lower pressure drop
- The Series 730 Vic-Strainer installs with two Victaulic couplings, and is rated up to 2065 kPa/300 psi
- A durable 304 stainless screen is provided. The standard mesh sizes are 12 mesh for sizes 40–80 mm/1½–3"; 6 mesh for sizes 100–300 mm/4–12"; other smaller sizes available

Size		Max. Work Pressure †	Dimensions					Approx. Wgt. Each	Flow Coefficient@ (Fully Open) K <sub>v</sub> Values C <sub>v</sub> Values
Nominal Size mm Inches	Actual Outside Diameter mm Inches		A mm Inches	B mm Inches	X mm Inches	Y mm Inches	H mm Inches		
40 1½	48.3 1.900	5175 750	140 5.50	95 3.75	75 2.94	148 5.81	6 0.25	3.2 7.0	52.8 61
50 2	60.3 2.375	5175 750	165 6.50	108 4.25	85 3.35	147 5.78	13 0.50	2.6 5.8	164.4 190
65 2½	73.0 2.875	5175 750	191 7.50	121 4.75	98 3.88	162 6.38	13 0.50	4.0 8.9	199.0 230
80 3	88.9 3.500	5175 750	216 8.50	133 5.25	115 4.54	173 6.81	19 0.75	9.5 21.0	250.9 290
100 4	114.3 4.500	5175 750	254 10.00	152 6.00	148 5.83	209 8.21	25 1.00	8.9 19.6	367.6 425
125 5	141.3 5.563	5175 750	279 11.00	165 6.50	179 7.03	251 9.89	32 1.25	14.2 31.3	592.5 685
150 6	168.3 6.625	4825 700	330 13.00	191 7.50	210 8.26	275 10.83	32 1.25	19.6 43.3	821.8 950
200 8	219.1 8.625	4130 600	394 15.50	229 9.00	268 10.54	349 13.74	51 2.00	34.0 75.0	1823.4 2108
250 10	273.0 10.750	3450 500	457 18.00	260 10.25	327 12.86	431 16.98	51 2.00	61.7 136.0	2320.8 2683
300 12	323.9 12.750	2750 400	508 20.00	286 11.25	377 14.86	480 18.88	51 2.00	89.4 197.2	3349.3 3872
350 – 600 14 – 24									


**AGS**™ See AGS Series W730, pg. 5-17

† Working pressure is maximum based on Style 07 access coupling and will be governed by couplings used for installation and related system components. Maximum differential pressure from inlet to outlet must not exceed 69 kPa/10 psi.

@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/60°F.

#### IMPORTANT NOTE:

For 500–750 mm/20–30" sizes contact Victaulic.

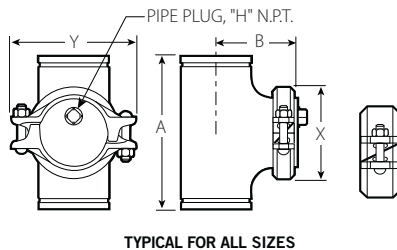

# Accessories

## Vic-Strainer – Wye Type

### SERIES 732

For Complete Information  
Request Publication 09.03




- Provides straight through flow for lower pressure drop
- Installs with two Victaulic couplings
- Durable 304 stainless perforated basket
- Pressure rated up to 2065 kPa/300 psi
- Sizes from 50–300 mm/2–12"

Size		Max. Work Press.†	Dimensions									Approx. Wgt. Each	Flow Coefficient@ K <sub>v</sub> Values C <sub>v</sub> Values
Nominal Size mm Inches	Actual Outside Diameter mm Inches		A End to End mm Inches	B mm Inches	C mm Inches	D mm Inches	E mm Inches	F mm Inches	G* mm Inches	H mm Inches			
50 2	60.3 2.375	2065 300	248 9.75	178 7.00	70 2.75	192 7.54	217 8.54	89 3.50	133 5.25	13 0.50	4.5 10.0	62.3 72	
65 2½	73.0 2.875	2065 300	273 10.75	197 7.75	76 3.00	211 8.32	237 9.32	105 4.13	148 5.81	13 0.50	6.4 14.0	96.0 111	
76.1 mm	76.1 3.000	2065 300	273 10.75	197 7.75	76 3.00	211 8.32	237 9.32	105 4.13	148 5.81	13 0.50	6.4 14.0	96.0 111	
80 3	88.9 3.500	2065 300	299 11.75	216 8.50	83 3.25	231 9.08	258 10.14	121 4.75	168 6.63	19 0.75	9.1 20.0	141.9 164	
100 4	114.3 4.500	2065 300	362 14.25	267 10.50	95 3.75	281 11.06	314 12.36	159 6.25	202 7.94	25 1.00	14.5 32.0	246.5 285	
139.7 mm	139.7 5.500	2065 300	419 16.50	318 12.50	102 4.00	330 13.00	365 14.36	200 7.88	241 9.50	25 1.00	22.7 50.0	354.7 410	
125 5	141.3 5.563	2065 300	419 16.50	318 12.50	102 4.00	330 13.00	365 14.36	200 7.88	241 9.50	25 1.00	22.7 50.0	354.7 410	
165.1 mm	165.1 6.500	2065 300	470 18.50	356 14.00	114 4.50	367 14.44	408 16.06	235 9.25	267 10.50	32 1.25	32.7 72.0	516.4 597	
150 6	168.3 6.625	2065 300	470 18.50	356 14.00	114 4.50	367 14.44	408 16.06	235 9.25	267 10.50	32 1.25	32.7 72.0	516.4 597	
200 8	219.1 8.625	2065 300	610 24.00	457 18.00	152 6.00	467 18.38	521 20.50	315 12.38	335 13.19	38 1.50	56.7 125.0	865.0 1000	
250 10	273.0 10.750	2065 300	686 27.00	533 21.00	152 6.00	559 22.00	605 23.82	362 14.25	404 15.92	51 2.00	93.0 205.0	1557.0 1800	
300 12	323.9 12.750	2065 300	762 30.00	622 24.50	140 5.50	629 24.75	695 27.37	432 17.00	463 18.23	51 2.00	127.0 280.0	2422.2 2800	
350 – 600 14 – 24		<b>AGS™</b>	See AGS Series W732, pg. 5-18										

† Working pressure is maximum and will be governed by couplings used for installation and related system components. Maximum differential pressure from inlet to outlet must not exceed 69kPa/10psi.

\* Dimensions will vary depending upon coupling orientation.

@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/60°F.

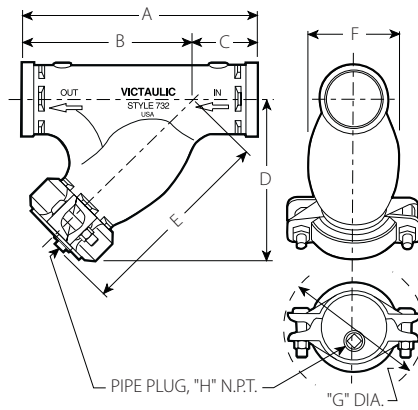

TYPICAL FOR ALL SIZES

# Accessories

## Mover Expansion Joint


### STYLE 150

For Complete Information  
Request Publication **09.04**



Size		Max. Work Pressure kPa psi	Dimensions					Approx. Wgt. Each kg Lbs.
Nominal Size mm Inches	Actual Outside Diameter mm Inches		Maximum Available Movement mm Inches	X Height mm Inches	Y Width mm Inches	Length Z		
						Minimum mm Inches	Maximum mm Inches	
50 2	60.3 2.375	2400 350	76.2 3.00	86 3.38	139 5.50	302 11.88	378 14.88	7.2 15.9
76.1 mm	76.1 3.000	2400 350	76.2 3.00	111 4.38	171 6.75	308 12.13	384 15.13	17.2 38.0
80 3	88.9 3.500	2400 350	76.2 3.00	121 4.75	184 7.25	308 12.13	384 15.13	11.6 25.6
100 4	114.3 4.500	2400 350	76.2 3.00	159 6.25	229 9.00	359 14.13	435 17.13	18.0 39.6
139.7 mm	139.7 5.500	2400 350	76.2 3.00	159 6.25	229 9.00	359 14.13	435 17.13	25.4 56.0
125 5	141.3 5.563	2400 350	76.2 3.00	181 7.12	273 10.75	359 14.13	435 17.13	24.9 55.0
165.1 mm	165.1 6.500	2400 350	76.2 3.00	219 8.63	305 12.00	406 16.00	483 19.00	34.0 75.0
150 6	168.3 6.625	2400 350	76.2 3.00	219 8.63	305 12.00	406 16.00	483 19.00	34.0 75.0

- Slip-type expansion joint
- Up to 80mm/3" axial end movement
- Permits easy adjustments prior to installation to accommodate expansion, contraction or both
- Service up to +110°C/+230°F
- Pressure rated up to 2400kPa/350psi depending on type of coupling installed
- Sizes from 50–150mm/2–6"

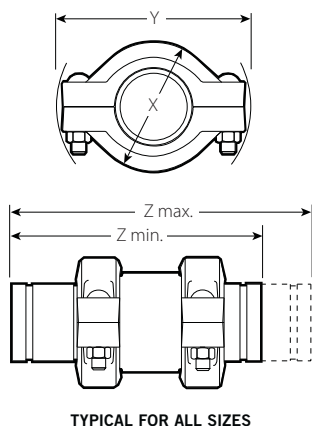

## Expansion Joint Installation

For Complete Information Request Publication **09.06**

For proper expansion joint operation, the piping system must be sectioned into individual straight pipe runs with suitable anchor installations. Within each pipe section, properly spaced alignment guides and weight support devices are also necessary to permit free axial pipe movement. Refer to installation instructions supplied with each unit.

Whenever possible, the expansion joint should be located adjacent to an anchor within four (4) pipe diameters. The first and second alignment guides on the opposite side of the expansion joint should be located at maximum distances of four (4) and fourteen (14) pipe diameters, respectively. Additional intermediate guides should be placed. If expansion joint cannot be located adjacent to an anchor, install guides on both sides of the unit.

In addition, where long length, low pressure applications may require few intermediate alignment guides, the pipe weight, including any liquid contents, must be adequately supported. (For recommended spacing for a water system request publication 26.01)

When installed the expansion joint can provide compensation for 80mm/3" of axial pipe movement. Expansion joint may be set to compensate for pipe expansion, contraction, or some combination. The movement caused by installation at a temperature other than the minimum or maximum operation temperature should also be accounted for. Refer to installation instructions supplied with each unit, or contact Victaulic for recommendations.

# Accessories

## Standard Expansion Joint

### STYLE 155

For Complete Information  
Request Publication 09.05



- Combination of couplings and short nipples joined in tandem
- May be used as flexible connectors; but they will not simultaneously provide full expansion and full deflection
- Joints installed horizontally require independent support to prevent deflection, that will reduce available expansion

Standard Units †								
Size		Style	Dimensions				Approx. Wgt. Each	
Nominal Size mm Inches	Actual Outside Diameter mm Inches	Coupling Style	L - Length (ref.) §		X Height mm Inches	Y Width mm Inches	Total Movement Capability mm Inches	kg Lbs.
			Compressed mm Inches	Expanded mm Inches				
20 ¾	26.7 1.050	77	667 26.25	715 28.13	54 2.13	92 3.63	48 1.88	7.7 17.0
25 1	33.7 1.315	77	667 26.25	715 28.13	61 2.38	99 3.88	48 1.88	9.1 20.0
32 1¼	42.4 1.660	77	718 28.25	765 30.13	67 2.63	118 4.63	48 1.88	12.7 28.0
40 1½	48.3 1.900	77	718 28.25	765 30.13	76 3.00	127 5.00	48 1.88	14.1 31.0
50 2	60.3 2.375	75	718 28.25	765 30.13	89 3.50	130 5.13	48 1.88	12.2 27.0
65 2½	73.0 2.875	75	718 28.25	765 30.13	102 4.00	149 5.88	48 1.88	16.3 36.0
80 3	88.9 3.500	75	718 28.25	765 30.13	118 4.63	172 6.75	48 1.88	20.9 46.0
90 3½	101.6 4.000	75	718 28.25	765 30.13	133 5.25	188 7.38	48 1.88	24.5 54.0
100 4	114.3 4.500	75	667 26.25	711 28.00	149 5.88	203 8.00	45 1.75	24.5 54.0
125 5	141.3 5.563	75	667 26.25	711 28.00	178 7.00	259 10.18	45 1.75	32.7 72.0
150 6	168.3 6.625	75	667 26.25	711 28.00	207 8.13	279 11.00	45 1.75	40.8 90.0
200 8	219.1 8.625	75	724 28.50	768 30.25	264 10.38	356 14.00	45 1.75	68.0 150.0
250 10	273.0 10.750	77	826 32.50	870 34.25	343 13.50	426 16.75	45 1.75	145.2 320.0
300 12	323.9 12.750	77	826 32.50	870 34.25	394 15.50	483 19.00	45 1.75	169.2 373.0


† Contact Victaulic for performance requirements not listed above.

§ Dimensions may vary slightly due to tolerances.

#### Important Note:

For Performance Data refer to 06.05 for Style 75 and 06.04 for Style 77.

350–600 mm/14–24" sizes available in the Advanced Grooved System. Contact Victaulic for details.

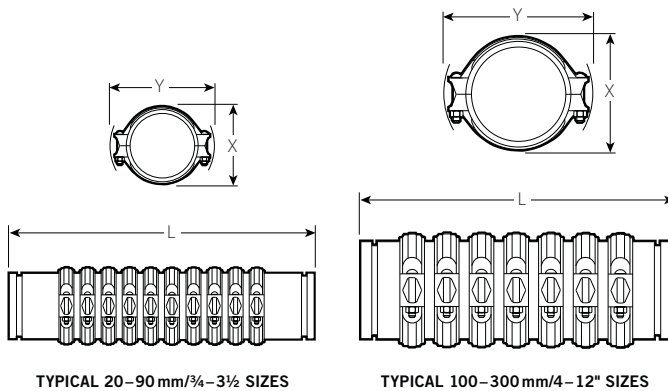

# Accessories


## Dielectric Waterway Fitting

### STYLE 47


For Complete Information  
Request Publication **09.07**



- Clearflow\* dielectric waterway fittings utilize an inert non-corrosive thermoplastic lining that is NSF/FDA listed and Australia Watermark certified
  - The thermoplastic lining insulates the inside of the waterway thereby inhibiting formation of local galvanic cell corrosion that occurs between dissimilar metals in the presence of water
  - Designed for continuous use at temperatures up to +110°C/+230°F
  - Style 47-GT (grv. x thd.) and 47-TT (thd. x thd.) NSF Listed and Australia Watermark certified in accordance with ANSI/NSF 61 for up to 82°C/180°F potable water service
  - Pressure rated up to 2065kPa/300psi
  - Sizes from 15–200mm/½–8"
- \* ClearFlow is a registered trademark of Perfection Corp.



STYLE 47-GT@  
GRV. x THD.



STYLE 47-TT@  
THD. x THD.

Size		Style 47-GT Grooved x Threaded			Style 47-TT Threaded x Threaded		
Nominal Size mm Inches	Actual Outside Dia. mm Inches	Max. Working Pressure kPa psi	End to End mm Inches	Approx. Wgt. Each kg Lbs.	Max. Working Pressure kPa psi	End to End mm Inches	Approx. Wgt. Each kg Lbs.
15 ½	21.3 0.840	—	—	—	2065 300	76 3.00	0.1 0.2
20 ¾	26.7 1.050	—	—	—	2065 300	76 3.00	0.1 0.2
25 1	33.7 1.315	2065 300	102 4.00	0.2 0.3	2065 300	102 4.00	0.2 0.3
32 1¼	42.4 1.660	2065 300	102 4.00	0.3 0.6	2065 300	102 4.00	0.3 0.6
40 1½	48.3 1.900	2065 300	102 4.00	0.3 0.8	2065 300	102 4.00	0.3 0.8
50 2	60.3 2.375	2065 300	102 4.00	0.5 1.0	2065 300	102 4.00	0.5 1.0
65 2½	73.0 2.875	2065 300	152 6.00	0.7 1.6	2065 300	152 6.00	0.7 1.6
80 3	88.9 3.500	2065 300	152 6.00	0.9 2.0	2065 300	152 6.00	0.9 2.0
90 3½	101.6 4.000	2065 300	152 6.00	1.1 2.3	2065 300	152 6.00	1.1 2.3
100 4	114.3 4.500	2065 300	152 6.00	2.0 4.5	2065 300	152 6.00	2.0 4.5

@ Available with British Standard Pipe Threads, specify "BSP" clearly on order.

# Accessories


## Dielectric Waterway Fitting

### STYLE 47

For Complete Information  
Request Publication **09.07**



- Clearflow\* dielectric waterway fittings utilize an inert non-corrosive thermoplastic lining that is NSF/FDA listed and Australia Watermark certified
  - The thermoplastic lining insulates the inside of the waterway thereby inhibiting formation of local galvanic cell corrosion that occurs between dissimilar metals in the presence of water
  - Designed for continuous use at temperatures up to +110°C/+230°F
  - Style 47-GG (grv. x grv.) is UL-Listed and classified and Australia Watermark certified in accordance with ANSI/NSF 61 up to 82°C/180°F for potable water service
  - Pressure rated up to 2065kPa/300psi
  - Sizes from 50–200 mm/2–8"
- \* ClearFlow is a registered trademark of Perfection Corp.



STYLE 47-GG GRV. x GRV.  
GROOVED END STEEL TO GROOVED COPPER TRANSITION

Nominal Size mm Inches	Size		Maximum Working Pressure  kPa psi	Dimensions  End to End mm Inches	Approx. Weight Each  kg Lbs.
	Actual Outside Diameter				
	Steel mm Inches	Copper mm Inches			
50 2	60.3 2.375	54.0 2.125	2065 300	106 4.19	0.6 1.3
65 2½	73.0 2.875	66.7 2.625	2065 300	157 6.19	1.5 3.3
80 3	88.9 3.500	79.4 3.125	2065 300	157 6.19	2.0 4.5
100 4	114.3 4.500	104.8 4.125	2065 300	157 6.19	2.6 5.8
125 5	141.3 5.563	130.2 5.125	2065 300	157 6.19	3.5 7.8
150 6	168.3 6.625	155.6 6.125	2065 300	157 6.19	4.6 10.1
200 8	219.1 8.625	206.4 8.125	2065 300	157 6.19	6.8 15.0

# Accessories

# Advanced Groove System



Victaulic offers a full range of 350–600mm/14–24" Advanced Groove System (AGS) couplings, fittings, valves and accessories – making AGS a comprehensive solution for large diameter piping. Because the AGS coupling system provides great strength and dependability in addition to speed, it's an excellent choice over welding. Other advantages AGS joints provide over welded joints include no flame, superior seismic-shock resistance and a union at every joint for easy adjustment, system maintenance or system expansion.



## Couplings

Rigid Coupling  
STYLE W07, PG. 5-3



Flexible Coupling  
STYLE W77, PG. 5-4



Rigid Coupling for  
Stainless Steel Pipe  
STYLE W89, PG. 5-5



AGS Vic-Flange®  
Adapter  
STYLE W741, PG. 5-6



## Valves

Dual Disc  
Vic Check Valve  
SERIES W715, PG. 5-13



Vic-300 AGS  
Butterfly Valve  
VIC-300, PG. 5-14



## Accessories

Suction Diffuser  
SERIES W731-I, PG. 5-16



Vic-Strainer® –  
Tee Type  
SERIES W730, PG. 5-17



Wye Type Vic-Strainer®  
STYLE W732, PG. 5-18




SECTION 5: ADVANCED GROOVE SYSTEM



# Advanced Groove System




A complete piping system, for sizes 350–600 mm/14–24"

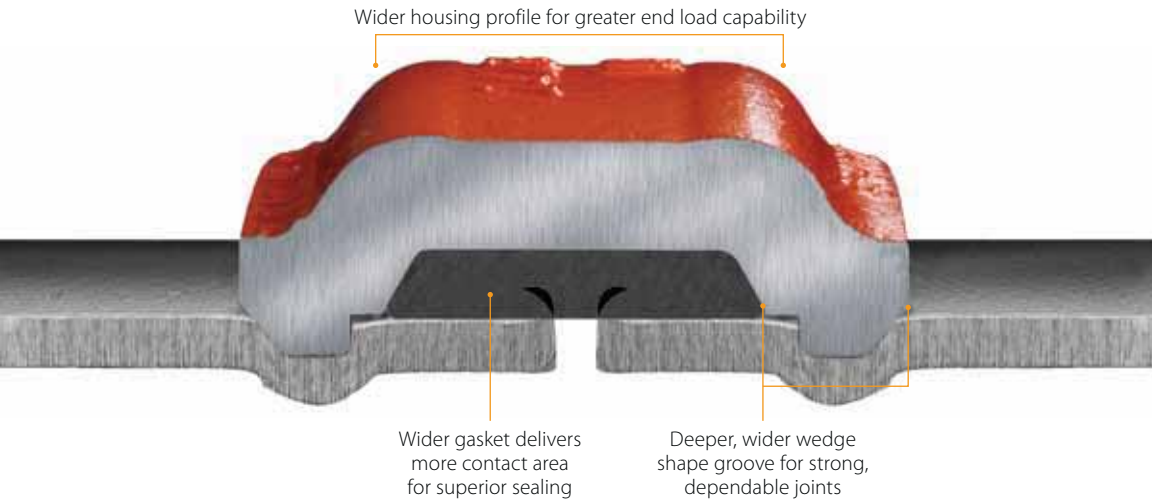


## PRODUCTS

- 1-12 Couplings
- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System**
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software

## Fittings



90° Elbow  
NO. W10, PG. 5-8



90° 1/2 D Long Radius Elbow  
NO. W100, PG. 5-8



True Wye  
NO. W33, PG. 5-8



Adapter Nipple  
AGS Grv. x Bev.  
NO. W42, PG. 5-11



45° Elbow  
NO. W11, PG. 5-8



45° 1/2 D Long Radius Elbow  
NO. W110, PG. 5-8



Cross  
NO. W35, PG. 5-8




Adapter Nipple  
AGS Grv. x AGS Grv.  
NO. W43, PG. 5-11



22 1/2° Elbow  
NO. W12, PG. 5-8



Tee  
NO. W20, PG. 5-8



45° Lateral  
NO. W30, PG. 5-10



Adapter Nipple  
AGS Grv. x Original Grv. \*  
NO. W49, PG. 5-11



Concentric Reducer  
NO. W50, PG. 5-12




Cap  
NO. W60, PG. 5-11



11 1/4° Elbow  
NO. W13, PG. 5-8



Reducing Tee  
NO. W25, PG. 5-9



45° Reducing Lateral  
NO. W30-R, PG. 5-10



Flanged Adapter Nipple  
NO. W45R, PG. 5-11



Eccentric Reducer  
NO. W51, PG. 5-12

\* Original Victaulic groove (not compatible with AGS couplings)



# Advanced Groove System – Couplings



## Rigid Coupling

### STYLE W07

For Complete Information  
Request Publication 20.02



- Style W07 is the first two-piece, flat pad, metal-to-metal rigid coupling in this size range
- Support and hanging requirements correspond to ASME B31.1 Power Piping code and ASME B31.9 Building Services code
- Pressure rated up to 2400 kPa/350 psi

Size		Max. Working Pressure* kPa/psi			Max. End Load* N/Lbs.			Allow. Pipe End Sep.#	Bolt/Nut No - Size	DimensionsØ – mm/Inches			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	Std. Wall	Light Wall	Extra Heavy mm ½"/12.7	Std. Wall	Light Wall	Extra Heavy mm ½"/12.7	mm Inches	Inches	X	Y	Z	kg Lbs.
350 14	355.6 14.000	2500 350	2500 350	– –	248310 55800	248310 55800	– –	6.4 0.25	2 - 1 x 5½	403 15.87	523 20.59	121 4.75	22.2 49
400 16	406.4 16.000	2500 350	2500 350	– –	324338 72885	324338 72885	– –	6.4 0.25	2 - 1 x 5½	460 18.12	597 23.51	121 4.75	27.7 61
450 18	457.0 18.000	2500 350	2500 350	– –	410490 92245	410490 92245	– –	6.4 0.25	2 - 1 x 5½	514 20.22	648 25.53	121 4.75	32.2 71
500 20	508.0 20.000	2500 350	2500 350	– –	506766 113880	506766 113880	– –	6.4 0.25	2 - 1½ x 5½	570 22.44	689 27.13	121 4.75	37.2 82
600 24	610.0 24.000	2500 350	2500 350	– –	729756 163990	467050 104955	– –	6.4 0.25	2 - 1½ x 5½	677 26.64	821 32.31	121 4.75	52.6 116
660 26	660.4 26.000	2065 300	–	2065 300	708508 159279	–	708508 159279	9.6 0.38	4 - 1⅝ x 6	764 30.07	895 35.23	144 5.68	93.0 205
710 28	711.2 28.000	2065 300	–	2065 300	821702 184726	–	821702 184726	9.6 0.38	4 - 1⅝ x 6	819 32.23	945 37.22	144 5.68	99.8 220
760 30	762.0 30.000	2065 300	–	2065 300	943281 212058	–	943281 212058	9.6 0.38	4 - 1¼ x 7	863 33.90	1007 39.64	144 5.68	103.0 227
810 32	812.8 32.000	2065 300	–	2065 300	1073240 241274	–	1073240 241274	9.6 0.38	4 - 1¼ x 7	916 36.07	1060 41.74	144 5.68	109.8 242
915 36	914.4 36.000	2065 300	–	2065 300	1358322 305363	–	1358322 305363	9.6 0.38	4 - 1¼ x 7	1022 40.23	1161 45.72	144 5.68	121.6 268
1015 40	1016.0 40.000	2065 300	–	2065 300	1676940 376991	–	1676940 376991	11.1 0.44	4 - 1½ x 7	1117 43.98	1283 50.51	165 6.50	154.2 340
1070 42	1066.8 42.000	2065 300	–	2065 300	1848823 415632	–	1848823 415632	11.1 0.44	4 - 1½ x 7	1168 45.98	1334 52.50	165 6.50	163.3 360
1170 46	1168.4 46.000	–	–	1600 232	–	–	1715746 385561	11.1 0.44	4 - 1½ x 7	1277 50.28	1435 56.48	165 6.50	188.2 415
1220 48	1219.2 48.000	–	–	1600 232	–	–	1868199 419820	11.1 0.44	4 - 1½ x 7	1328 52.28	1485 58.47	165 6.50	192.8 425
1370 54	1371.6 54.000	–	–	1200 175	–	–	1782803 400790	12.7 0.50	4 - 1½ x 7	1655 65.16	1499 59.03	254 10.00	293.9 648
1420 56	1422.2 56.000	–	–	1200 175	–	–	1917317 431030	12.7 0.50	4 - 1½ x 7	1718 67.65	1550 61.03	254 10.00	306.6 676
1525 60	1524.0 60.000	–	–	1200 175	–	–	2201025 494800	12.7 0.50	4 - 1½ x 7	1832 72.13	1652 65.03	254 10.00	326.6 720

\* Working Pressure and End Load are total, from all internal and external loads, based on standard weight (ANSI) steel pipe, AGS roll grooved in accordance with Victaulic® specifications. Contact Victaulic for performance on other pipe **Note:** Actual maximum working pressure is 363 psi/2500 kPa for 14 – 20"/350 – 500 mm on light wall; 232 psi/1600 kPa for 24"/600 mm on light wall; 363 psi/2500 kPa for 14 – 24"/350 – 500 mm on standard wall.

WARNING: FOR ONE TIME FIELD TEST ONLY, the Maximum Joint Working Pressure may be increased to 1½ times the figures shown.


‡ Light Wall for 14"/350 mm = 0.22"/5.6 mm; 16 – 24"/400 – 600 mm = 0.25"/6.35 mm

# For field installation only on roll grooved pipe. Style W07 AGS couplings are essentially rigid and do not permit expansion/contraction.

Ø Corresponding line drawings are on page 4.

NOTE: Metric thread size bolts are available (color coded gold) for all coupling sizes upon request. Contact Victaulic for details.

NOTE: Style W07 AGS couplings must not be used to join PVC pipe.

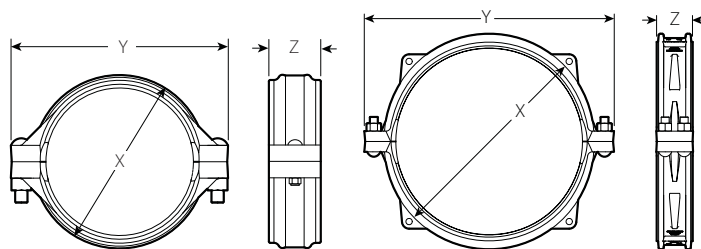

TYPICAL FOR ALL SIZES

TYPICAL 26 – 60"/660 – 1525 mm

# Advanced Groove System – Couplings



## Flexible Coupling

### STYLE W77

For Complete Information  
Request Publication 20.03



- Style W77 is the only flexible two-piece housing for this size range on the market today
- Style W77 provides limited linear angular movement to accommodate thermal pipe growth, vibration attenuation, seismic and other design considerations that require flexibility
- Pressure rated up to 2400kPa/350psi

Size		Max. Working Pressure* kPa/psi			Max. End Load* N/Lbs.			Allow. Pipe End Sep.†	Deflect. From CL †		Bolt/Nut No - Size	DimensionsØ – mm/Inches			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	Std. Wall	Light Wall	Extra Heavy mm ½"/12.7	Std. Wall	Light Wall	Extra Heavy mm ½"/12.7	mm Inches	Per Cplg. Deg.	Pipe mm/m In./Ft.	Inches	X	Y	Z	kg Lbs.
350 14	355.6 14.000	2500 350	2500 350	–	248310 55800	248310 55800	–	3.3 – 7.9 0.13 – 0.31	0.73	13 0.15	2 - 1 x 5½	406 1600	523 20.59	114 4.50	21.8 48
400 16	406.4 16.000	2500 350	2500 350	–	324338 72885	324338 72885	–	3.3 – 7.9 0.13 – 0.31	0.63	11 0.13	2 - 1 x 5½	462 18.18	597 23.51	114 4.50	26.3 58
450 18	457.0 18.000	2500 350	2500 350	–	410490 92245	410490 92245	–	3.3 – 7.9 0.13 – 0.31	0.57	10 0.12	2 - 1 x 5½	517 20.36	647 25.46	114 4.50	29.5 65.0
500 20	508.0 20.000	2500 350	2500 350	–	506766 113880	506766 113880	–	3.3 – 7.9 0.13 – 0.31	0.50	9 0.10	2 - 1 ½ x 5½	573 22.56	689 27.13	114 4.50	37.2 82
600 24	609.6 24.000	2500 350	2500 350	–	729756 163990	467050 104955	–	3.3 – 7.9 0.13 – 0.31	0.42	8 0.09	2 - 1 ½ x 5½	683 26.88	821 32.31	114 4.50	48.5 107
660 26	660.4 26.000	2065 300	–	2065 300	708508 159279	–	708508 159279	3.81-13.46 0.15-0.53	0.83	15 0.18	4 - 1 x 6	764 30.07	895 35.23	144 5.68	93.0 205
710 28	711.2 28.000	2065 300	–	2065 300	821702 184726	–	821702 184726	3.81-13.46 0.15-0.53	0.78	14 0.16	4 - 1 ½ x 6	819 32.23	945 37.22	144 5.68	99.8 220
760 30	762.0 30.000	2065 300	–	2065 300	943281 212058	–	943281 212058	3.81-13.46 0.15-0.53	0.73	13 0.16	4 - 1 ¼ x 7	863 33.90	1007 39.64	144 5.68	103.0 227
810 32	812.8 32.000	2065 300	–	2065 300	1073240 241274	–	1073240 241274	3.81-13.46 0.15-0.53	0.68	11 0.14	4 - 1 ¼ x 7	916 36.07	1060 41.74	144 5.68	109.8 242
915 36	914.4 36.000	2065 300	–	2065 300	1358322 305363	–	1358322 305363	3.81-13.46 0.15-0.53	0.60	11 0.13	4 - 1 ¼ x 7	1022 40.23	1161 45.72	144 5.68	121.6 268
1015 40	1016.0 40.000	2065 300	–	2065 300	1676940 376991	–	1676940 376991	5.33-14.99 0.21-0.59	0.55	10 0.12	4 - 1 ½ x 7	1117 43.98	1283 50.51	165 6.50	154.2 340
1070 42	1066.8 42.000	2065 300	–	2065 300	1848823 415632	–	1848823 415632	5.33-14.99 0.21-0.59	0.52	9 0.11	4 - 1 ½ x 7	1168 45.98	1334 52.50	165 6.50	163.3 360
1170 46	1168.4 46.000	–	–	1600 232	–	–	1715746 385561	5.33-14.99 0.21-0.59	0.47	8 0.10	4 - 1 ½ x 7	1277 50.28	1435 56.48	165 6.50	188.2 415
1220 48	1219.2 48.000	–	–	1600 232	–	–	1868199 419820	5.33-14.99 0.21-0.59	0.45	8 0.10	4 - 1 ½ x 7	1328 52.28	1485 58.47	165 6.50	192.8 425
1370 54	1371.6 54.000	–	–	1200 175	–	–	1782803 400790	7.11-16.76 0.28-0.66	0.40	7 0.08	4 - 1 ½ x 7	1655 65.16	1499 59.03	254 10.00	293.9 648
1420 56	1422.2 56.000	–	–	1200 175	–	–	1917317 431030	7.11-16.76 0.28-0.66	0.38	7 0.08	4 - 1 ½ x 7	1718 67.65	1550 61.03	254 10.00	306.6 676
1525 60	1524.0 60.000	–	–	1200 175	–	–	2201025 494800	7.11-16.76 0.28-0.66	0.36	7 0.08	4 - 1 ½ x 7	1832 72.13	1652 65.03	254 10.00	326.6 720

\* Working Pressure and End Load are total, from all internal and external loads, based on minimum nominal wall thicknesses shown within AGS Roll Groove Specifications 25.09, AGS roll grooved in accordance with Victaulic® specifications. Contact Victaulic for performance on other pipe. **Note:** Actual maximum working pressure is 363 psi/2500 kPa for 14 – 20"/350 – 500 mm on light wall; 232 psi/1600 kPa for 24"/600 mm on light wall; 363 psi/2500 kPa for 14 – 24"/350 – 500 mm on standard wall.

WARNING: FOR ONE TIME FIELD TEST ONLY, the Maximum Joint Working Pressure may be increased to 1½ times the figures shown.

‡ Light Wall for 14"/350 mm = 0.22"/5.6 mm; 16 – 24"/400 – 600 mm = 0.25"/6.35 mm

† Allowable Pipe End Separation and Deflection figures show the maximum nominal range of movement available at each joint for AGS roll grooved pipe.

These figures are maximums; for design and installation purposes these figures should be reduced by 25%.


Metric thread size bolts are available (color coded gold) for all coupling sizes upon request. Contact Victaulic for details.

Ø Corresponding line drawings are on page 4.

NOTE: Style W77 AGS couplings must not be used to join PVC pipe.

NOTE: The Style W77 coupling in 26-60"/660-1525 mm sizes can not be used anything larger than 0.5"/12.7 mm wall pipe.

NOTE: The outside diameter of roll grooved pipe shall not vary more than the limits of API 5L end tolerance. The maximum allowable tolerance from square cut ends is 0.125"/3.18 mm measured from a true square line.

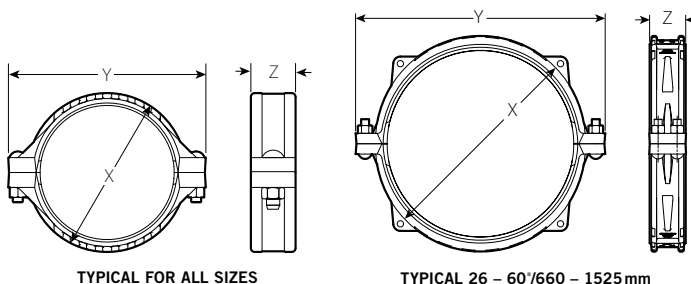

# Advanced Groove System – Couplings



## Rigid Coupling for Stainless Steel Pipe


### STYLE W89

For Complete Information  
Request Publication **20.15**



- Designed exclusively for stainless steel systems
- Coupling provides an essentially rigid joint
- Pressure rated up to 2065 kPa/300 psi

Size		Max. Work Pressure*	Max. End Load*	Allow. Pipe End Sep.†	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	kPa psi	N Lbs.	mm Inches	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
350 14	355.6 14.000	2065 300	205590 46200	6.4 0.25	419 16.50	543 21.38	122 4.81	29.5 65.0
400 16	406.4 16.000	2065 300	268424 60320	6.4 0.25	480 18.88	597 23.50	122 4.81	36.4 80.0
450 18	457.0 18.000	2065 300	339758 76350	6.4 0.25	533 21.00	651 25.63	122 4.81	42.3 93.0
500 20	508.0 20.000	2065 300	419413 94250	6.4 0.25	603 23.75	702 27.63	122 4.81	51.8 114.0
600 24	610.0 24.000	2065 300	603865 135700	6.4 0.25	762 30.00	813 32.00	122 4.81	82.6 182.0



TYPICAL FOR ALL SIZES

\* Working Pressure and End Load are total, from all internal and external loads, based on stainless steel pipe, AGS **roll** grooved in accordance with Victaulic specifications. "RWX" rolls must be used for Schedule 10S. Contact Victaulic for performance on other pipe.

WARNING: FOR ONE TIME FIELD TEST ONLY, the Maximum Joint Working Pressure may be increased to 1 ½ times the figures shown.

† For field installation only on roll grooved pipe. Style W89 AGS couplings are essentially rigid and do not permit expansion/contraction.

# Advanced Groove System – Couplings



## Vic-Flange® Adaptor

### STYLE W741

For Complete Information  
Request Publication **20.04**.



- Pressure rated up to 2065 kPa/300 psi
- Directly incorporates flanged components to AGS grooved piping systems
- Available in sizes 350-600mm/14-24"

Size		Max. Working Pressure*		Max. End Load*		Assembly Bolts †		Draw Bolts §		Sealing Surface mm/Inches		Dimensions mm/Inches								Aprx. Wgt Each
Nml Size	Actual Outside Diameter	Std. Wall	Light Wall ‡	Std. Wall	Light Wall	† No. Bolts Req'd.	Size Inches	No. Bolts	Size Inches	"A" Max.	"B" Min.	T	U	V	W	X	Y	Z	kg Lbs.	
350 14	355.6 14.000	2065 300	2065 300	205501 46180	205501 46180	12	1 x 4½	2	¾ x 3½	356 14.00	406 16.00	493 19.4	37 1.44	24 0.94	622 24.5	533 21.0	476 18.75	60 2.38	30 66	
400 16	406.4 16.000	2065 300	2065 300	268402 60315	268402 60315	16	1 x 4½	2	¾ x 3½	406 16.00	457 18.00	546 21.5	37 1.44	24 0.94	688 27.1	597 23.5	540 21.25	60 2.38	37 81	
450 18	457.0 18.000	2065 300	2065 300	339713 76340	339713 76340	16	1½ x 4¾	2	¾ x 4¼	457 18.00	508 20.00	566 22.3	40 1.56	25 1.00	737 29.0	635 25.0	578 22.75	65 2.56	38 84	
500 20	508.0 20.000	2065 300	2065 300	419413 94250	419413 94250	20	1½ x 5¼	2	¾ x 4¼	508 20.00	559 22.00	610 24.0	43 1.69	25 1.00	800 31.5	698 27.5	635 25.00	68 2.69	50 110	
600 24	610.0 24.000	2065 300	1600 225#	603932 135715	452943 101785	20	1½ x 5¾	2	¾ x 4¼	610 24.00	660 26.00	737 29.0	49 1.94	20 0.80	914 36.0	813 32.0	749 29.50	70 2.74	70 155	

\* Working Pressure and End Load are total, from all internal and external loads, based on carbon steel pipe AGS roll grooved in accordance with Victaulic specifications. Contact Victaulic for performance on other pipe.  
WARNING: FOR ONE TIME FIELD TEST ONLY, the Maximum Joint Working Pressure may be increased to 1 ½ times the figures shown.

† Total bolts required to be supplied by installer, may be ordered from Victaulic. Bolt sizes for conventional flange-to-flange connection. Longer bolts required when Vic-Flange utilized with wafer-type valves.


§ Draw bolts supplied with 350 – 600 mm/14 – 24" Vic-Flange adaptors.

‡ Lightwall 14"/350 mm = 5.6 mm/0.22"; 400 – 600 mm/16 – 24" = 6.35 mm/0.25"

# Rounded for global use. Actual maximum working pressure is 1600 kPa/232 psi.

#### IMPORTANT NOTE:

Style W741 AGS Vic-Flange adaptor provides rigid joints when used on pipe with AGS groove dimensions and consequently allows no linear or angular movement at the joint.

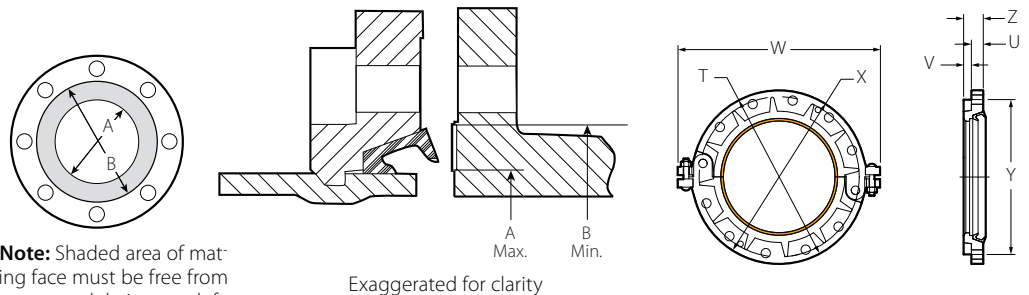


**Note:** Shaded area of mating face must be free from gouges undulations or deformities of any type for effective sealing

Exaggerated for clarity

## Elbows

- NO. W10** 90° Elbow
- NO. W11** 45° Elbow
- NO. W12** 22½° Elbow
- NO. W13** 11¼° Elbow
- NO. W100** 90° Long Radius
- NO. W110** 45° Long Radius (Ductile Iron#)

Request Publication  
**20.05**

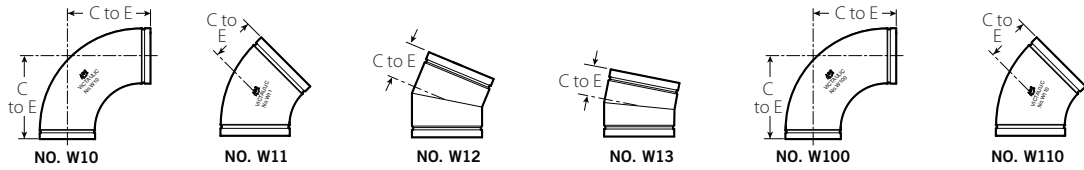


Size		No. W10 90° Elbow		No. W11 45° Elbow		No. W12 22½° Elbow (sw)		No. W13 11¼° Elbow (sw)		No. W100 90° Long Radius Elbow (S)		No. W110 45° Long Radius Elbow (S)	
Nominal Size mm Inches	Actual Outside Dia. mm Inches	C to E mm Inches	Approx. Wgt. Each kg Lbs.	C to E mm Inches	Approx. Wgt. Each kg Lbs.	C to E mm Inches	Approx. Wgt. Each kg Lbs.	C to E mm Inches	Approx. Wgt. Each kg Lbs.	C to E mm Inches	Approx. Wgt. Each kg Lbs.	C to E mm Inches	Approx. Wgt. Each kg Lbs.
350 14	355.6 14.000	355.6 14.00	68.4 150.8	147 5.80	28.7 63.0	127 5.00	20.9 46.0	89 3.50	14.5 32.0	533 21.00	71.7 158.0	222 8.75	37.6 83.0
400 16	406.4 16.000	406.4 16.00	83.6 184.3	168 6.63	42.5 93.8	127 5.00	23.6 52.1	102 4.00	19.1 42.0	610 24.00	92.7 204.3	254 10.00	45.8 101.1
450 18	457.0 18.000	457.0 18.00	123.5 272.3	189 7.46	58.5 129.0	140 5.50	29.5 65.0	114 4.50	24.1 53.2	686 27.00	118.0 260.0	286 11.25	57.6 127.0
500 20	508.0 20.000	508.0 20.00	141.5 312.0	210 8.28	75.0 165.3	152 6.00	36.0 78.6	127 5.00	29.5 65.0	762 30.00	149.0 328.5	318 12.50	75.7 167.0
600 24	610.0 24.000	610.0 24.00	253.9 559.8	252 9.94	120.0 264.5	178 7.00	50.0 110.3	152 6.00	42.9 94.5	914 36.00	222.3 490.0	381 15.00	110.1 244.8

# Ductile iron except those marked (sw) which are segmentally welded steel or (S) which are steel.

## Tees, Crosses and Wyes

- NO. W20** Tee
- NO. W35** Cross
- NO. W33** True Wye (Ductile Iron #)

For Complete Information  
Request Publication **20.05**

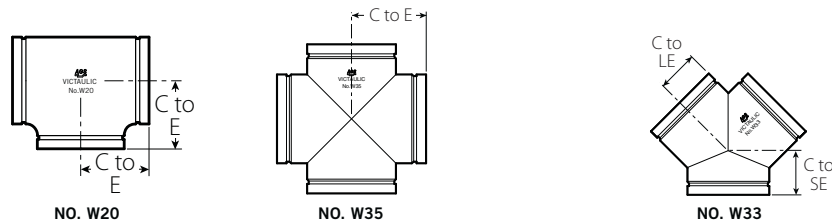

Size		No. W20 Tee		No. W35 Cross (sw)		No. W33 True Wye (sw)		
Nominal Size mm Inches	Actual Outside Diameter mm Inches	C to E mm Inches	Approx. Weight Each kg Lbs.	C to E mm Inches	Approx. Weight Each kg Lbs.	C to LE mm Inches	C to SE mm Inches	Approx. Weight Each kg Lbs.
350 14	355.6 14.000	279 11.00	46.3 102.0	279 11.00	54.9 121.0	279 11.00	191 7.50	44.4 98.0
400 16	406.4 16.000	305 12.00	56.0 123.5	305 12.00	66.4 146.4	305 12.00	203 8.00	54.1 119.3
450 18	457.0 18.000	343 13.50	127.5 281.0	343 13.50	84.1 185.4	343 13.50	216 8.50	67.3 148.3
500 20	508.0 20.000	381 15.00	158.7 350.0	381 15.00	103.9 229.1	381 15.00	229 9.00	81.8 180.4
600 24	610.0 24.000	432 17.00	228.5 503.7	432 17.00	135.5 298.7	432 17.00	254 10.00	108.1 238.3


# Ductile iron except those marked (sw) which are segmentally welded steel.

## Reducing Tee

### NO. W25

(Segmentally Welded Steel)

For Complete Information  
Request Publication **20.05**



NO. W25

Size			No. W25 Reducing Tee		Approx. Weight Each
Nominal Size mm	Inches	Inches	C to LE mm	C to SE mm	kg
					Lbs.
350 14	× 350 14	× 150 6	279	238	46.0
			11.00	9.38	101.4
			279	248	46.5
			11.00	9.75	102.5
			250	257	47.7
10	11.00	10.12	105.1		
400 16	× 400 16	× 150 6	305	264	57.2
			12.00	10.38	126.2
			305	273	57.8
			12.00	10.75	127.4
			250	282	58.9
10	12.00	11.12	129.8		
450 18	× 450 18	× 150 6	343	289	72.6
			13.50	11.38	160.0
			343	298	73.0
			13.50	11.75	161.0
			250	308	74.0
10	13.50	12.12	163.1		
300 12	× 300 12	× 150 6	343	321	75.1
			13.50	12.62	165.6
			343	330	76.0
			13.50	13.00	167.6
			400	330	76.3
16	13.50	13.00	168.2		

Size			No. W25 Reducing Tee		Approx. Weight Each	
Nominal Size mm	Inches	Inches	C to LE mm	C to SE mm	kg	
					Lbs.	
500 20	× 500 20	× 150 6	381	314	89.5	
			15.00	12.38	197.0	
			381	324	90.0	
			15.00	12.75	198.5	
			250	333	90.9	
			10	15.00	13.12	200.5
			300	346	92.0	
			12	15.00	13.62	202.9
			350	356	92.9	
			14*	15.00	14.00	204.7
600 24	× 600 24	× 150 6	381	356	93.0	
			15.00	14.00	205.0	
			400	368	94.5	
			16*	15.00	208.4	
			450	368	94.5	
			18	15.00	208.4	
			432	365	122.0	
			17.00	14.38	260.9	
			432	375	123.0	
			17.00	14.75	270.0	
250 10	× 250 10	× 150 6	432	384	123.2	
			17.00	15.12	271.7	
			432	397	124.2	
			17.00	15.62	273.8	
			300	406	125.0	
			12	17.00	275.4	
			350	406	125.0	
			14	17.00	275.4	
			400	406	125.0	
			16	17.00	275.4	
450 18	× 450 18	× 150 6	432	419	127.1	
			17.00	16.50	278.1	
			432	432	128.0	
			17.00	17.00	282.1	
			500	432	128.0	
20	17.00	282.1				

\* Cast fitting available. Contact Victaulic for details.

### IMPORTANT NOTE:

Outlets 300mm/12" and smaller will be provided with standard Victaulic roll or cut grooves, suitable for use with standard Victaulic grooved couplings in that size range.


# Advanced Groove System – Fittings



## 45° Lateral

**NO. W30**  
(Segmentally Welded Steel)


For Complete Information  
Request Publication **20.05**



## 45° Reducing Lateral

**NO. W30-R**  
(Segmentally Welded Steel)

For Complete Information  
Request Publication **20.05**



Size		No. W30 45° Lateral		
Nominal Size mm Inches	Actual Outside Diameter mm Inches	C to LE mm Inches	C to SE mm Inches	Approx. Weight Each kg Lbs.
350 14	355.6 14.000	673 26.50	191 7.50	99.4 219.1
	400 16	406.4 16.000	737 29.00	203 270.5
450 18	457.0 18.000	813 32.00	216 8.50	150.9 332.7
	500 20	508.0 20.000	889 35.00	229 401.3
600 24	610.0 24.000	1016 40.00	254 10.00	245.5 541.3

Size			No. W30-R Reducing Lateral		
Nominal Size mm Inches	C to LE mm Inches	C to SE mm Inches	Approx. Weight Each kg Lbs.		
350 14 × 350 14 ×	100 4	673 26.50	191 7.50	79.8 175.9	
	150 6	673 26.50	191 7.50	84.3 185.9	
	200 8	673 26.50	191 7.50	88.4 195.0	
	250 10	673 26.50	191 7.50	92.7 204.4	
	300 12	673 26.50	191 7.50	96.8 213.3	
400 16 × 400 16 ×	150 6	737 29.00	203 8.00	102.7 226.4	
	200 8	737 29.00	203 8.00	107.1 236.0	
	250 10	737 29.00	203 8.00	111.6 246.0	
	300 12	737 29.00	203 8.00	115.7 255.1	
	350 14	737 29.00	203 8.00	118.4 260.9	
450 18 × 450 18 ×	150 6	813 32.00	216 8.50	214.6 274.8	
	200 8	813 32.00	216 8.50	229.4 285.3	
	300 12	813 32.00	216 8.50	338.9 306.2	
	350 14	813 32.00	216 8.50	441.7 312.4	
	400 16	813 32.00	216 8.50	546.2 322.4	
500 20 × 500 20 ×	300 12	889 35.00	229 9.00	164.3 362.1	
	350 14	889 35.00	229 9.00	167.2 368.7	
	400 16	889 35.00	229 9.00	172.1 379.4	
600 24 × 600 24 ×	400 16	1016 40.00	254 10.00	224.5 494.9	
	600 20	1016 40.00	254 10.00	254.8 517.7	

**IMPORTANT NOTE:**

Outlets 300mm/12" and smaller will be provided with standard Victaulic roll or cut groove, suitable for use with standard Victaulic grooved couplings in that size range.

SECTION 5: ADVANCED GROOVE SYSTEM




# Advanced Groove System – Fittings




## Adapter Nipple

- NO. W42** AGS Grv. × Bev.
- NO. W43** AGS Grv. × AGS Grv.
- NO. W49** AGS Grv. × Original Grv. (Steel)


Request Publication **20.05**



NO. W42



NO. W43




NO. W49

Size		No. W42, W43, W49 Adapter Nipple (sw)	
Nominal Size mm Inches	Actual Outside Diameter mm Inches	E to E mm Inches	Approx. Weight Each kg Lbs.
350 14	355.6 14.000	203 8.00	16.3 36.0
400 16	406.4 16.000	203 8.00	19.1 42.0
450 18	457.0 18.000	203 8.00	21.3 47.0
500 20	508.0 20.000	203 8.00	23.6 52.0
600 24	610.0 24.000	203 8.00	28.6 63.0

## Flanged Adapter Nipple

- NO. W45R** ANSI Class 150 Raised Face (Steel)

For Complete Information Request Publication **20.05**




NO. W45R

Size		No. W45R Flanged Adapter Nipple	
Nominal Size mm Inches	Actual Outside Diameter mm Inches	E to E mm Inches	Approx. Weight Each kg Lbs.
350 14	355.6 14.000	203 8.00	55.3 122.0
400 16	406.4 16.000	203 8.00	61.7 136.0
450 18	457.0 18.000	203 8.00	76.2 168.0
500 20	508.0 20.000	203 8.00	94.3 208.0
600 24	610.0 24.000	203 8.00	124.3 274.0

## Cap

- NO. W60** (Steel)

For Complete Information Request Publication **20.05**



NO. W60

Size		No. W60 Cap	
Nominal Size mm Inches	Actual Outside Diameter mm Inches	T Thickness mm Inches	Approx. Weight Each kg Lbs.
350 14	355.6 14.000	165 6.50	15.1 33.2
400 16	406.4 16.000	178 7.00	18.7 41.2
450 18	457.0 18.000	203 8.00	24.8 54.6
500 20	508.0 20.000	229 9.00	30.6 67.5
600 24	610.0 24.000	267 10.50	43.5 96.0

## Concentric/Eccentric Reducer


**NO. W50** Concentric

**NO. W51** Eccentric  
(Steel†)

For Complete Information  
Request Publication **20.05**



NO. W50



NO. W51

Size	No. W50 Concentric Reducer		No. W51 Eccentric Reducer	
	Nominal Size mm Inches	E to E mm Inches	Approx. Weight Each kg Lbs.	Approx. Weight Each kg Lbs.
350 14 × 150 6	330 13.00	30.8 68.0	330 13.00	30.8 68.0
	330 13.00	31.8 70.0	330 13.00	31.8 70.0
	330 13.00	32.7 72.0	330 13.00	32.7 72.0
	330 13.00	33.6 74.0	330 13.00	33.6 74.0
400 16 × 200 8	356 14.00	39.9 88.0	356 14.00	39.9 88.0
	330 13.00	41.3 91.0	330 13.00	41.3 91.0
	356 14.00	42.2 93.0	356 14.00	42.2 93.0
	356 14.00	43.1 95.0	356 14.00	43.1 95.0
450 18 × 350 14	381 15.00	50.8 112.0	381 15.00	50.8 112.0
	381 15.00	52.2 115.0	381 15.00	52.2 115.0
	381 15.00	53.5 118.0	381 15.00	53.5 118.0
	381 15.00	54.9 121.1	381 15.00	54.9 121.1

Size	No. W50 Concentric Reducer		No. W51 Eccentric Reducer	
	Nominal Size mm Inches	E to E mm Inches	Approx. Weight Each kg Lbs.	Approx. Weight Each kg Lbs.
500 20 × 300 12	508 20.00	72.6 160.0	508 20.00	72.6 160.0
	508 20.00	74.4 164.0	508 20.00	74.4 164.0
	508 20.00	76.2 168.0	508 20.00	76.2 168.0
	508 20.00	78.0 172.0	508 20.00	78.0 172.0
600 24 × 400 16	508 20.00	89.9 198.0	508 20.00	89.9 198.0
	508 20.00	90.7 200.0	508 20.00	90.7 200.0
	508 20.00	92.5 204.0	508 20.00	92.5 204.0
	508 20.00	92.5 204.0	508 20.00	92.5 204.0

† Some fitting sizes are available in cast ductile iron.  
Contact Victaulic for details.

**IMPORTANT NOTE:**

Outlets 300mm/12" and smaller will be provided with standard Victaulic roll or cut grooves, suitable for use with standard Victaulic grooved couplings in that size range.

SECTION 5: ADVANCED GROOVE SYSTEM

# Advanced Groove System – Valves



## Dual Disc Vic Check Valve

### SERIES W715


For Complete Information  
Request Publication 20.08



Size		Dimensions			Approx. Weight Each	Flow Coefficient@ (Fully Open)
Nominal Size mm Inches	Actual Outside Diameter mm Inches	A End to End mm Inches	B mm Inches	C mm Inches	kg Lbs.	K <sub>v</sub> Values C <sub>v</sub> Values
350 14	355.6 14.000	273 10.75	430 16.93	366 14.38	64.0 140.0	5190.0 6000
400 16	406.4 16.000	305 12.00	505 19.88	416 16.38	73.0 160.0	7179.5 8300
450 18	457.0 18.000	362 14.25	547 21.54	467 18.38	82.0 180.0	9082.5 10500
500 20	508.0 20.000	368 14.50	628 24.75	518 20.38	91.0 200.0	11937.0 13800
600 24	610.0 24.000	394 15.50	732 28.81	620 24.38	109.0 240.0	17732.5 20500

@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/+60°F with valve fully open.

- Can be installed in both horizontal or vertical “flow up” positions
- Constructed of rugged ductile iron, the valve features an EPDM seat bonded to the body and a 304 stainless steel disc and shaft
- Utilizes a spring-assisted, dual disc design that achieves drop tight sealing over the full 16Bar/230psi pressure rating
- Sizes from 350–600mm/14–24"

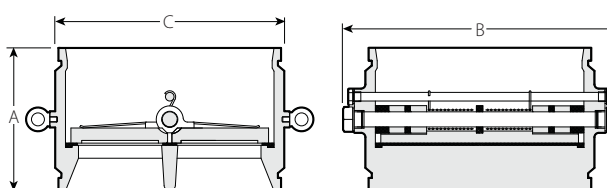


TYPICAL FOR ALL SIZES

# Advanced Groove System – Valves



## Vic-300 AGS Butterfly Valve

For Complete Information  
Request Publication 20.06

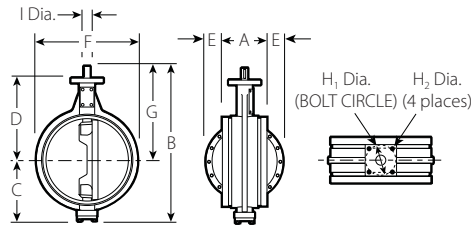

TYPICAL FOR ALL SIZES

### VIC-300 AGS BUTTERFLY VALVE WITHOUT GEAR OPERATOR

- Available with handwheel gear operator, electric, pneumatic or hydraulic actuators and two and three way configurations
- Easier to install than cumbersome multi-bolt wafer, lug type or flanged valves
- Features AGS grooved ends for 350–600mm/14–24" systems for 2065kPa/300psi bi-directional services

Size		Dimensions											Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Diameter mm Inches	A End to End mm Inches	B Overall Height mm Inches	C mm Inches	D mm Inches	E mm Inches	F mm Inches	G mm Inches	Mounting †			w/o Oper. kg Lbs.	
									H <sub>1</sub> Dia. mm Inches	H <sub>2</sub> Dia. mm Inches	I Dia. mm Inches		
350 14	355.6 14.000	254 10.00	621 24.45	246 9.68	327 12.89	29 1.16	406 16.00	375 14.77	126 4.96	15 0.578	35 1.38	56.7 125.0	
400 16	406.4 16.000	267 10.50	689 27.14	278 10.94	358 14.10	48 1.90	457 18.00	412 16.20	126 4.96	15 0.578	38 1.50	69.4 153.0	
450 18	457.0 18.000	279 11.00	751 29.56	313 12.31	381 15.00	59 2.64	508 20.00	438 17.25	126 4.96	15 0.578	45 1.75	90.3 199.0	
500 20	508.0 20.000	292 11.50	829 32.64	357 14.06	409 16.10	87 3.42	584 23.00	472 18.58	140 5.51	17 0.672	51 2.00	129.3 285.0	
600 24	610.0 24.000	305 12.00	988 38.89	408 16.06	511 20.10	131 5.17	678 26.70	580 22.83	165 6.50	21 0.844	57 2.25	204.6 451.0	

#### † MOUNTING KEY:

- 350 mm/14" – 3/8 Sq. × 1 7/8
- 400 mm/16" – 3/8 Sq. × 2 1/2
- 450 mm/18" – (2) 3/8 Sq. × 2
- 500 mm/20" – (2) 1/2 Sq. × 2 1/4
- 600 mm/24" – (2) 5/8 Sq. × 3

#### IMPORTANT NOTES:

Dimensions provided without operator are for sizing data only. Vic-300 AGS butterfly valves should never be installed without operators.


Vic-300 AGS butterfly valves have longer end to end dimensions and AGS groove dimensions and cannot be used to directly replace existing Series 706 butterfly valves.

# Advanced Groove System – Valves



## Vic-300 AGS Butterfly Valve

For Complete Information  
Request Publication **20.06**

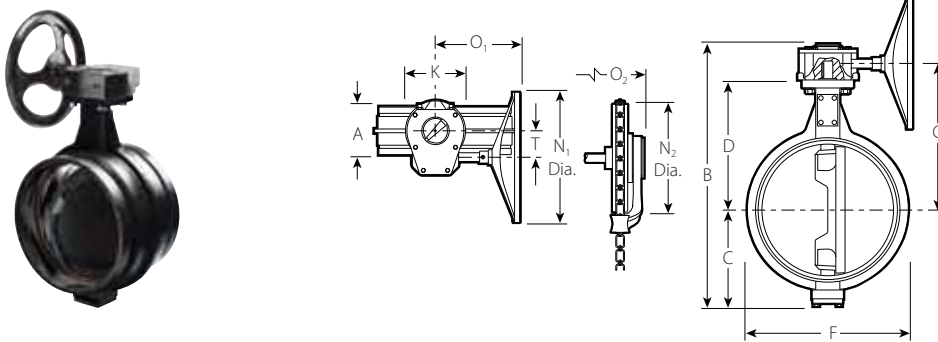

TYPICAL FOR ALL SIZES

### VIC-300 AGS BUTTERFLY VALVE WITH GEAR OPERATOR

Size		Dimensions													No. Turns to Close	Approx. Wgt. Each	Flow Coefficient@ (Fully Open) K <sub>v</sub> Values C <sub>v</sub> Values
Nominal Size mm Inches	Actual Outside Diameter mm Inches	A End to End mm Inches	B Overall Height mm Inches	C mm Inches	D mm Inches	F mm Inches	G mm Inches	K mm Inches	Handwheel		Chain Wheel		T mm Inches				
									N <sub>1</sub> Dia. mm Inches	O <sub>1</sub> mm Inches	N <sub>2</sub> Dia. mm Inches	O <sub>2</sub> mm Inches					
350 14	355.6 14.000	254 10.00	665 26.17	246 9.68	327 12.89	406 16.00	367 14.54	200 7.87	500 19.70	327 12.86	546 21.50	406 16.00	77 3.02	9.5	70.8 156.0	8096.4 9360	
400 16	406.4 16.000	267 10.50	737 29.00	278 10.94	358 14.10	457 18.00	406 15.99	220 8.66	500 19.70	364 14.34	546 21.50	444 17.47	86 3.38	13.75	91.2 201.0	10726.0 12400	
450 18	457.0 18.000	279 11.00	817 32.17	313 12.31	381 15.00	508 20.00	436 17.17	285 11.22	700 27.60	395 15.55	762 30.00	474 18.68	111 4.38	21	122.2 269.5	13753.5 15900	
500 20	508.0 20.000	292 11.50	920 36.23	357 14.06	409 16.10	584 23.00	464 18.27	285 11.22	700 27.60	468 18.43	762 30.00	549 21.60	137 5.38	52	174.3 384.2	17127.0 19800	
600 24	610.0 24.000	305 12.00	1017 42.41	408 16.06	511 20.10	678 26.70	569 22.42	370 14.57	700 27.60	521 20.51	762 30.00	599 23.60	137 5.38	79.25	274.4 605.0	24998.5 28900	

@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/+60°F with valve fully open.

# Advanced Groove System – Accessories



## Suction Diffuser


### Series W731-I

For Complete Information  
Request Publication 20.13



- Series W731-I provides optimum flow conditions at the inlet side of the pump
- Bosses are provided on either side for pressure measurement
- Coupling secures closure cap greatly reducing down time for maintenance
- Pressure rated up to 2065 kPa/300 psi

Size		Dimensions Inches/mm									Approx. Wgt. Each
System Side Inlet	Pump Side Outlet	C-E1	C-E2	CLR	C-O	D	L	OAL	OAW	kg Lbs.	
350 14	250 10	–	588 23.13	711 28.00	435 17.13	135 5.32	227 8.93	737 29.00	438 17.25	186.0 410.0	
	300 12	279 11.00	–	889 35.00	613 24.13	149 5.88	253 9.95	953 37.50	514 20.25	196.9 434.0	
	350 14	–	664 26.13	991 39.00	664 26.13	175 6.88	280 11.03	1030 40.56	622 24.50	322.5 711.0	
400 16	300 12	–	664 26.13	889 35.00	613 24.13	149 5.88	253 9.95	953 37.50	438 17.25	264.5 583.0	
	350 14	305 12.00	–	991 39.00	664 26.13	175 6.88	280 11.03	1030 40.56	622 24.50	249.9 551.0	
450 18	400 16	343 13.50	–	1092 43.00	727 28.63	200 7.88	308 12.14	1130 44.50	689 27.13	307.5 678.0	
600 24	600 24	432 17.00	–	1397 55.00	943 37.13	276 10.88	397 15.63	1378 54.25	800 13.50	499.9 1102.0	

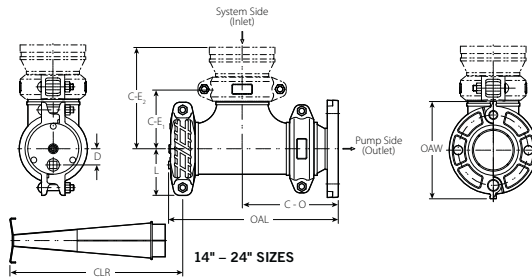

† Pump side flange ANSI Class 150.

**Important Note:** Maximum differential pressure from inlet to outlet must not exceed 69 kPa/10 psi.

## Vic-Strainer – Tee Type

### SERIES W730

For Complete Information Request Publication 20.11



- Series W730 provides straight-through flow for low pressure drop
- Access cap permits easy cleaning
- Pressure rated up to 2065 kPa/300psi


Size		Max. Work Pressure kPa psi	Dimensions					Approx. Wgt. Each kg Lbs.	Flow Coefficient@ (Fully Open) K <sub>v</sub> Values C <sub>v</sub> Values
Nominal Size mm Inches	Actual Outside Diameter mm Inches		A mm Inches	B mm Inches	X* mm Inches	Y* mm Inches	H N.P.T. mm Inches		
350 14	355.6 14.000	2065 300	559 22.00	451 17.75	311 12.25	450 17.70	51 2.00	136.1 300.0	4368.3 5050
400 16	406.4 16.000	2065 300	610 24.00	476 18.75	349 13.75	521 20.50	51 2.00	158.8 350.0	6920.0 8000
450 18	457.0 18.000	2065 300	787 31.00	591 23.25	387 15.25	592 23.30	51 2.00	181.4 400.0	9117.1 10540
500 20	508.0 20.000	2065 300	876 34.50	657 25.88	430 16.94	648 25.50	51 2.00	256.3 565.0	10345.4 11960
600 24	610.0 24.000	2065 300	1016 40.00	765 30.13	506 19.94	719 28.30	51 2.00	376.5 830.0	14897.0 17222

@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/+60°F.

\* See minimum clearance requirement table below.


#### IMPORTANT NOTE:

Maximum differential pressure from inlet to outlet must not exceed 69 kPa/10 psi.



TYPICAL FOR ALL SIZES

## Series W730 Recommended Minimum Clearance Required to Remove Diffuser Basket



Recommended Minimum Clearance Required to Remove Strainer Basket		
Nominal Size mm Inches	Actual Outside Diameter mm Inches	C Strainer Basket Clearance† Dimensions mm Inches
350 14	355.6 14.000	762 30.00
400 16	406.4 16.000	813 32.00
450 18	457.0 18.000	889 35.00
500 20	508.0 20.000	965 38.00
600 24	610.0 24.000	1118 44.00

† Measurement is from the center line to the top of the basket during removal.

#### IMPORTANT NOTES:

Sizes shown are nominal DN sizes, except where actual mm sizes are shown.

## Wye Type Vic-Strainer®

### STYLE W732

For Complete Information  
Request Publication 20.19.




Size		Max. Work Pressure kPa psi	Dimensions – mm/Inches												Approx. Wgt. Each kg Lbs.
Nominal Size mm Inches	Actual Outside Diameter mm Inches		End to End									"TAP"			
			A	B	C	D	E	F	G	H	J	K	L	M	
350 14	355.60 14.00	2065 300	863.6 34.00	658.6 25.93	205 8.07	641.8 25.27	739.8 29.13	461 18.15	523.0 20.59	2 NPT	180 7.09	NPT ¼"	85 3.35	200.0 7.87	192.8 425
400 16	406.40 16.00	2065 300	939.8 37.00	694.8 27.35	245 9.65	689.5 27.15	779.8 30.70	520 20.47	597.2 23.51	2 NPT	200 7.87	NPT ¼"	95 3.74	225.5 8.88	272.2 600
450 18	457.20 18.00	2065 300	1028.9 40.51	768.9 30.27	260 10.24	760.5 29.94	853.8 33.61	594 23.39	648.5 25.53	2 NPT	200 7.87	NPT ¼"	95 3.74	251.0 9.88	362.9 800


#Working pressure is maximum and will be governed by couplings used for installation and related system components. Maximum differential pressure from inlet to outlet must not exceed 10 psi/69 kPa.

\*Dimensions will vary depending upon coupling orientation.

- Provides straight through flow for lower pressure drop
- Access cap provides easy cleaning
- Pressure rated up to 2065 kPa/ 300 psi
- Available in sizes 350-450 mm/14-18"

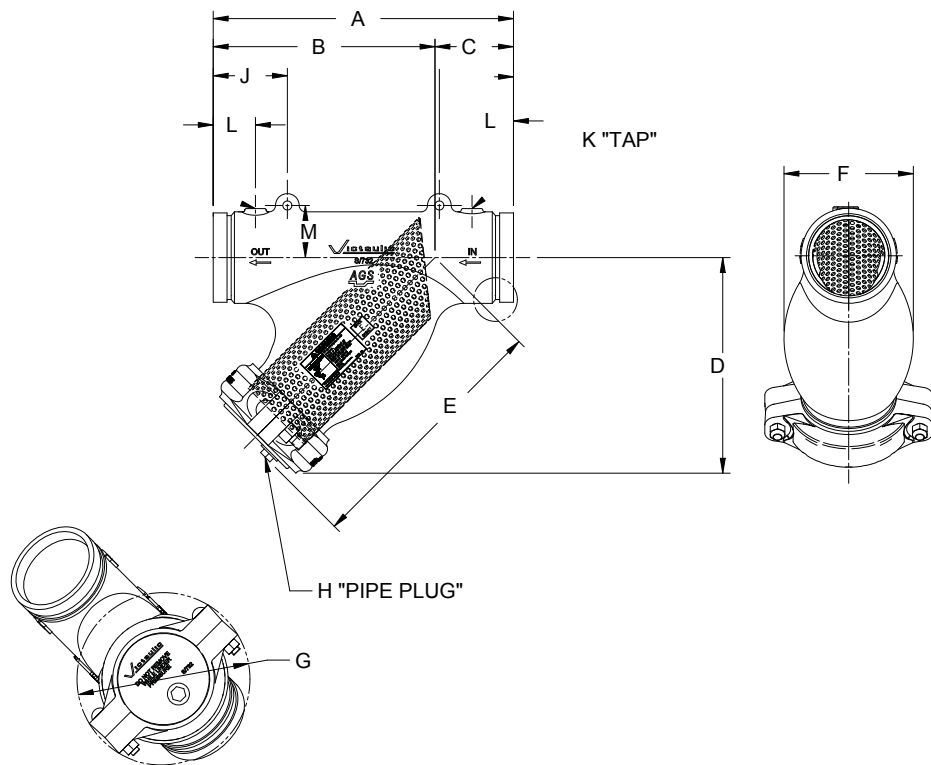

### MINIMUM CLEARANCE REQUIREMENTS FOR REMOVAL OF SUCTION DIFFUSER BASKETS



Pipe Size		"C" Strainer Basket Minimum Clearance mm/inches
Nominal Diameter mm/inches	Actual Outside Diameter mm/inches	Series W732
14	355.6	762
350	14.000	30.00
16	406.4	813
400	16.000	32.00
18	457.0	889
450	18.000	35.00





# Hole Cut Piping System

- Victaulic developed the concept of a fast, easy mid-pipe outlet that would not require welding
- Gaskets are molded to conform to the O.D. of the pipe and are of a pressure responsive design
- Request publication 11.01
- Victaulic hole cut products are mounted to the pipe using either a locating collar (Style 920 and 920N) or a toe and heel (Style 923/924), and provide a smooth flow area

## Hole Cutting Tools



The Vic-Tap is perfect for applications where systems cannot be shut down to add branch connections. Capable of tapping into steel pipe systems under pressures up to 3450 kPa/500 psi Vic-Tap automatically removes the piping coupon avoiding possible damage to equipment in the pipe line, see pg.15-10.

### Mechanical-T® Bolted Branch Outlet

STYLE 920 AND STYLE 920N GROOVED OUTLET, PG. 6-2



### Mechanical-T Bolted Branch Outlet

STYLE 920 AND STYLE 920N FEMALE THREADED OUTLET, PG. 6-2



### Mechanical-T Bolted Branch Outlet

STYLE 920 AND STYLE 920N CROSS, PG. 6-4



### Vic-Let™ Strapless Outlet

STYLE 923, PG. 6-5



### Vic-O-Well™ Strapless Thermometer Outlet

STYLE 924, PG. 6-6



### Mechanical-T® Bolted Branch Outlet and Crosses for Copper

STYLE 622, PG. 11-7



## PRODUCTS

- 1-1 Couplings
- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System**
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software



# Hole Cut Piping System

## Mechanical-T Bolted Branch Outlet


### STYLE 920/920N

Grooved Outlet/Female Thd. Outlet

For Complete Information  
Request Publication **11.02**



GROOVED OUTLET



FEMALE THREADED OUTLET

- Provides a direct branch connection at any location where a hole can be cut in the pipe
- A pressure responsive gasket provides the seal
- Pressure rated up to 2750 kPa/400 psi
- Sizes from 50×15 mm/2×½" through 219.1×76.1 mm/8×4"

#### IMPORTANT NOTES:

Style 920 and Style 920N housings cannot be mated to one another to achieve cross connections.

Sizes shown are nominal DN sizes, except where actual mm sizes are shown.

Size	Style No.	Max. Work Pressure@	Dimensions							Approx. Weight Each				
			Run × Branch Nominal Size mm Inches	920 or 920N	psi kPa	Hole Diameter +0.13 -0.00	T ** mm Inches	V †# Threaded mm Inches	V † Grooved mm Inches	W mm Inches	Y mm Inches	Z mm Inches	Female Threaded kg Lbs.	Grooved kg Lbs.
50 2	×	15 ½ (a) □	920N	2750 400	38.1 1.50	51 2.00	64 2.53	—	41 1.61	136 5.35	70 2.75	1.5 3.1	—	
			920N	2750 400	38.1 1.50	50 1.97	64 2.53	—	41 1.61	136 5.35	70 2.75	1.5 3.1	—	
	×	25 1 (a) □	920N	2750 400	38.1 1.50	47 1.85	64 2.53	—	41 1.61	136 5.35	70 2.75	1.4 3.0	—	
			920N	2750 400	44.5 1.75	52 2.05	70 2.75	76 3.00	41 1.61	136 5.35	76 3.00	1.7 3.5	1.5 3.2	
	×	40 1 ½ (a) † □	920N	2750 400	44.5 1.75	52 2.03	70 2.75	79 3.12	41 1.61	136 5.35	83 3.25	1.7 3.6	1.5 3.2	—
			920N	2750 400	38.1 1.50	56 2.21	70 2.74	—	46 1.82	143 5.64	70 2.75	1.4 3.0	—	
2 ½ 65	×	15 ½ (a) § □	920N	2750 400	38.1 1.50	55 2.18	70 2.74	—	46 1.82	143 5.64	70 2.75	1.4 3.0	—	
			920N	2750 400	38.1 1.50	52 2.06	70 2.74	—	46 1.82	143 5.64	70 2.75	1.4 2.9	—	
	×	20 ¾ (a) § □	920N	2750 400	44.5 1.75	58 2.30	76 3.00	83 3.25	46 1.82	160 6.29	76 3.00	1.7 3.5	1.5 3.2	
			920N	2750 400	50.8 2.00	58 2.28	76 3.00	83 3.25	46 1.82	159 6.26	83 3.25	1.7 3.6	1.6 3.3	
	×	32 1 ¼ (a) † □	920N	2750 400	44.5 1.75	58 2.30	76 3.00	84 3.31	49 1.92	160 6.29	76 3.00	1.6 3.5	1.5 3.2	—
			920N	2750 400	50.8 2.00	58 2.28	76 3.00	84 3.31	49 1.92	160 6.29	83 3.25	1.6 3.5	1.5 3.3	—
76.1	×	15 ½ (a)	920N	2065 300	38.1 1.50	56 2.22	70 2.75	—	57 2.25	164 6.46	81 3.18	1.8 3.9	—	
			920N	2065 300	38.1 1.50	56 2.19	70 2.75	—	57 2.25	164 6.46	81 3.18	1.8 3.9	—	
	×	25 1 (a)	920N	2065 300	38.1 1.50	53 2.07	70 2.75	—	57 2.25	164 6.46	81 3.18	1.7 3.8	—	
			920N	2750 400	44.5 1.75	58 2.30	76 3.00	84 3.31	49 1.92	160 6.29	76 3.00	1.6 3.5	1.5 3.2	
	×	40 1 ½ (a) † □	920N	2750 400	50.8 2.00	58 2.28	76 3.00	84 3.31	49 1.92	160 6.29	83 3.25	1.6 3.5	1.5 3.3	—
			920N	2750 400	38.1 1.50	64 2.52	78 3.05	—	58 2.28	156 6.15	70 2.75	1.6 3.4	—	
80 3	×	20 ¾ (a) □	920N	2750 400	38.1 1.50	63 2.49	78 3.05	—	58 2.28	156 6.15	70 2.75	1.6 3.4	—	
			920N	2750 400	38.1 1.50	61 2.38	78 3.06	—	58 2.28	156 6.15	70 2.75	1.6 3.3	—	
	×	32 (b) 1 ¼ (a) † □	920N	2750 400	44.5 1.75	65 2.55	83 3.25	90 3.56	58 2.28	156 6.15	76 3.00	1.8 3.8	1.8 3.7	
			920N	2750 400	50.8 2.00	71 2.78	89 3.50	90 3.56	58 2.28	156 6.15	83 3.25	1.9 4.1	1.8 3.8	
	×	40 (b) 1 ½ (a) † □	920N	2750 400	63.5 2.50	70 2.75	89 3.50	90 3.56	58 2.28	172 6.75	99 3.88	2.3 4.9	2.1 4.6	
			920N	2750 400	63.5 2.50	70 2.75	89 3.50	90 3.56	58 2.28	172 6.75	99 3.88	2.3 4.9	2.1 4.6	
×	50 2 (a) † □	920N	2750 400	63.5 2.50	—	—	95 3.75	62 2.44	171 6.72	99 3.88	—	1.8 3.8		
		920N	2750 400	38.1 1.50	77 3.03	90 3.56	—	68 2.69	178 7.01	70 2.75	1.8 3.7	—		
100 4	×	20 ¾ (a) □	920N	2750 400	38.1 1.50	76 3.00	90 3.56	—	68 2.69	178 7.01	70 2.75	1.8 3.7	—	
			920N	2750 400	38.1 1.50	73 2.88	90 3.56	—	68 2.69	178 7.01	70 2.75	1.8 3.6	—	
	×	25 1 (a) □	920N	2750 400	44.5 1.75	78 3.08	96 3.78	102 4.00	68 2.69	178 7.01	76 3.00	1.9 4.0	1.8 3.6	
			920N	2750 400	50.8 2.00	83 3.28	102 4.00	102 4.00	68 2.69	178 7.01	83 3.25	2.0 4.2	1.9 3.9	
	×	32 (b) 1 ¼ (a) † □	920N	2750 400	63.5 2.50	83 3.25	102 4.00	102 4.00	68 2.69	178 7.01	83 3.25	2.0 4.2	1.9 4.6	
			920N	2750 400	69.9 2.75	73 2.88	102 4.00	102 4.00	68 2.69	186 7.34	118 4.63	2.6 5.8	2.3 5.0	
×	40 (b) 1 ½ (a) † □	920N	2750 400	69.9 2.75	—	—	102 4.00	68 2.69	186 7.34	118 4.63	—	2.9 6.4		
		920N	2750 400	88.9 3.50	84 3.31	114 4.50	105 4.12	68 2.69	196 7.73	130 5.12	3.8 8.4	2.9 6.4		

TABLE CONTINUED ON PG. 6-3, SEE FOOTNOTES ON PG. 6-4





# Hole Cut Piping System

## Mechanical-T Bolted Branch Outlet (cont'd)


### STYLE 920/920N

Grooved Outlet/Female Thd. Outlet

For Complete Information  
Request Publication **11.02**



GROOVED OUTLET



FEMALE THREADED OUTLET

- Provides a direct branch connection at any location where a hole can be cut in the pipe
- A pressure responsive gasket provides the seal
- Pressure rated up to 2750 kPa/400 psi
- Sizes from 50×15 mm/2×½" through 219.1×76.1 mm/8×4"

#### IMPORTANT NOTES:

Style 920 and Style 920N housings cannot be mated to one another to achieve cross connections.

Sizes shown are nominal DN sizes, except where actual mm sizes are shown.

Size	Style No.	Max. Work Pressure@	Dimensions							Approx. Weight Each		
			Run × Branch Nominal Size mm Inches	920 or 920N	psi kPa	Hole Diameter +0.13 -0.00	T ** mm Inches	V †# Threaded mm Inches	V † Grooved mm Inches	W mm Inches	Y mm Inches	Z mm Inches
TABLE CONTINUED FROM PG. 6-2												
108.0 ×	32 1¼ (a) □	920N	2750 400	44.5 1.75	78 3.08	96 3.78	—	67 2.63	194 7.64	78 3.05	2.3 5.0	—
	40 1½ (a) □	920N	2750 400	50.8 2.00	83 3.28	102 4.00	—	67 2.63	194 7.64	83 3.25	2.3 5.0	—
	50 2 (a)	920N	2750 400	63.5 2.50	83 3.25	102 4.00	—	67 2.63	194 7.64	102 4.00	1.9 4.0	—
	76.1 mm	920	2750 400	69.9 2.75	73 2.88	102 4.00	102 4.00	67 2.63	194 7.64	109 4.29	3.6 8.0	—
	80 3 (a)	920	2750 400	88.9 3.50	84 3.31	114 4.50	—	67 2.63	194 7.64	124 4.88	3.1 6.8	3.0 6.5
125 5 ×	40 1½ (a) †	920	2750 400	50.8 2.00	102 4.03	121 4.75	121 4.75	80 3.16	246 9.70	94 3.69	3.4 7.4	3.4 7.6
	50 2 (a) †	920	2750 400	63.5 2.50	102 4.00	121 4.75	121 4.75	80 3.16	246 9.70	111 4.38	3.7 8.2	3.6 8.0
	65 2½ (a) †	920	2750 400	69.9 2.75	92 3.63	121 4.75	121 4.75	80 3.16	246 9.70	118 4.63	3.8 8.3	3.6 7.9
	76.1 mm □	920	2750 400	69.9 2.75	—	—	121 4.75	80 3.16	246 9.70	118 4.63	—	3.6 8.0
	80 3 (a) †	920	2750 400	88.9 3.50	97 3.81	127 5.00	118 4.63	80 3.16	246 9.70	135 5.31	3.8 8.4	4.0 8.8
133.0 ×	50 2	920N	2750 400	63.5 2.50	95 3.75	114 4.50	—	81 3.17	203 8.00	99 3.88	3.6 8.0	—
	80 3	920	2750 400	88.9 3.50	97 3.81	127 5.00	—	76 3.00	240 9.46	135 5.31	3.6 8.0	—
139.7 ×	40 1½ †	920N	2750 400	50.8 2.00	96 3.78	114 4.50	—	84 3.30	209 8.23	83 3.25	3.2 7.0	—
	50 2 †	920N	2750 400	63.5 2.50	95 3.75	114 4.50	—	84 3.30	209 8.23	99 3.88	4.1 9.0	—
	76.1 mm	920	2750 400	69.9 2.75	92 3.63	121 4.75	—	80 3.13	250 9.85	118 4.63	4.0 8.8	—
	76.1 mm	920	2750 400	88.9 3.50	—	—	118 4.63	80 3.16	246 9.70	135 5.31	—	5.0 11.0
	88.9 3	920	2750 400	88.9 3.50	96.80 3.81	127 5.00	118 4.63	80 3.16	250 9.85	137 5.38	6.4 14.0	6.4 14.2
150 6 ×	32 (b) 1¼ (a)	920N	2750 400	44.5 1.75	112 4.43	—	—	96 3.79	232 9.15	83 3.25	—	2.2 4.8
	40 (b) 1½ (a) † □	920N	2750 400	50.8 2.00	112 4.40	130 5.13	130 5.13	96 3.79	232 9.15	83 3.25	2.4 5.4	2.3 5.1
	50 2 (a) † □	920N	2750 400	63.5 2.50	111 4.38	130 5.13	130 5.13	96 3.79	232 9.15	99 3.88	2.7 6.0	2.5 5.6
	65 2½ (a) †	920	2750 400	69.9 2.75	110 4.01	130 5.13	130 5.12	94 3.69	267 10.51	118 4.63	3.8 8.3	3.4 7.6
	76.1 mm □	920	2750 400	69.9 2.75	—	—	132 5.12	94 3.69	267 10.51	118 4.63	—	3.8 8.4
	80 3 (a) †	920	2065 300	88.9 3.50	110 4.31	140 5.50 □	130 5.13	94 3.69	267 10.51	135 5.31	4.5 9.9	3.8 8.4
159.0 ×	100 4 (a) † □	920	2065 300	114.3 4.50	97 3.81	146 5.75	137 5.38	94 3.69	267 10.51	159 6.25	4.6 10.1	4.6 10.1
	32 1¼	920N	2750 400	44.5 1.75	113 4.43	130 5.13	—	92 3.63	239 9.40	83 3.25	4.1 9.0	4.0 8.7
	40 1½ (a)	920N	2750 400	50.8 2.00	112 4.41	130 5.13	—	92 3.63	239 9.40	83 3.25	3.5 7.8	—
	50 2 (a)	920N	2750 400	63.5 2.50	111 4.38	130 5.13	—	92 3.63	239 9.40	99 3.88	3.6 8.0	—
	76.1 mm	920	2750 400	69.9 2.75	111 4.38	140 5.50	130 5.13	92 3.63	239 9.40	118 4.63	4.3 9.5	4.3 9.5
	80 3	920	2750 400	88.9 3.50	110 4.31	140 5.50	130 5.13	92 3.63	239 9.40	135 5.31	3.7 8.1	6.4 14.0
	108.1 mm	920	2750 400	114.3 4.50	—	—	137 5.38	92 3.63	239 9.40	155 6.12	—	4.5 10.0
165.1 ×	100 4	920	2750 400	114.3 4.50	96.80 3.81	146 5.75	—	92 3.63	239 9.40	159 6.25	8.2 18.0	—
	25 1	920N	2750 400	38.1 1.50	99 3.88	116 4.56	—	96 3.79	237 9.34	70 2.75	3.6 8.0	—
	32 1¼ □	920N	2750 400	44.5 1.75	113 4.43	130 5.13	—	96 3.79	237 9.34	83 3.25	3.8 8.4	—
40 1½ (a) †	920N	2750 400	50.8 2.00	112 4.41	130 5.13	—	96 3.79	237 9.34	83 3.25	3.8 8.4	—	



TABLE CONTINUED ON PG. 6-4, SEE FOOTNOTES ON PG. 6-4

# Hole Cut Piping System



## Mechanical-T Bolted Branch Outlet (cont'd)

### STYLE 920/920N Grooved Outlet/Female Thd. Outlet

For Complete Information  
Request Publication **11.02**



GROOVED OUTLET



FEMALE THREADED OUTLET

- Provides a direct branch connection at any location where a hole can be cut in the pipe
- A pressure responsive gasket provides the seal
- Pressure rated up to 2750 kPa/400 psi
- Sizes from 50×15mm/2×½" through 219.1×76.1mm/8×4"

#### IMPORTANT NOTES:

Style 920 and Style 920N housings cannot be mated to one another to achieve cross connections.

Sizes shown are nominal DN sizes, except where actual mm sizes are shown.

Size	Style No.	Max. Work Pressure@	Dimensions							Approx. Weight Each		
			Run × Branch Nominal Size mm Inches	920 or 920N	psi kPa	Hole Diameter +0.13 -0.00	T ** mm Inches	V †# Threaded mm Inches	V ‡ Grooved mm Inches	W mm Inches	Y mm Inches	Z mm Inches
<b>TABLE CONTINUED FROM PG. 6-3</b>												
165.1 ×	50 2 (a) †	920N	2750 400	63.5 2.50	111 4.38	130 5.13 <sup>‡</sup>	—	96 3.79	237 9.34	99 3.88	3.9 8.5	—
	65 2½ † <sup>‡</sup>	920	2750 400	69.9 2.75	110 4.01	130 5.13	—	92 3.63	267 10.51	118 4.63	3.9 8.6	3.4 7.6
	76.1 mm	920	2750 400	69.9 2.75	110 4.01	130 5.13	132 5.21 <sup>‡</sup>	92 3.63	267 10.51	118 4.63	3.9 8.6	3.4 7.6
	80 3 (a) †*	920	2750 400	88.9 3.50	110 4.31	140 5.50	130 5.13 <sup>‡</sup>	92 3.63	267 10.51	135 5.31	4.6 10.2	3.8 8.4
	100 4 (a) † <sup>‡</sup>	920	2750 400	114.3 4.50	97 3.81	146 5.75	137 5.38	92 3.63	267 10.51	159 6.25	4.8 10.5	3.8 8.4
200 8 ×	50 2 (a) †	920	2750 400	69.9 2.75	138 5.44	157 6.19	159 6.25 <sup>‡</sup>	122 4.81	316 12.42	114 4.50	5.3 11.6	5.3 11.6
	65 2½ (a) †	920	2750 400	69.9 2.75	129 5.07	157 6.19	157 6.19	122 4.81	316 12.42	114 4.50	5.3 11.6	5.3 11.6
	76.1 mm <sup>‡</sup>	920	2750 400	69.9 2.75	—	—	159 6.25	122 4.81	316 12.42	116 4.56	—	5.3 11.6
	80 3 (a) † <sup>‡</sup>	920	2065 300	88.9 3.50	135 5.31	165 6.50	165 6.50	122 4.81	316 12.42	135 5.31	5.7 12.6	5.3 11.6
	100 4 (a) † <sup>‡</sup>	920	2065 300	114.3 4.50	122 4.81	171 6.75	162 6.38	122 4.81	316 12.42	159 6.25	6.9 15.3	5.7 12.5

\*\* Center of run to engaged pipe end, female threaded outlet only (dimensions approximate).

† Available with grooved or female threaded outlet. Specify choice on order.

‡ Center of run to end of fitting.

# Female threaded outlets are available to NPT and BSPT specifications.

@ These pressure ratings are general guidelines. Please consult Publication 10.01 for specific pressure ratings by type of pipe.

(a) British Standard female pipe threaded outlet is available as listed. Specify "BSPT" clearly on order.

(b) For 76.1 mm threaded outlet, specify 2½" BSPT clearly on order.

§ VdS approved for fire protection services.

‡ LPCB approved for fire protection services.

\* Approved for use in China by Tianjin Approvals Company.

## Mechanical-T Bolted Branch Outlet

### STYLE 920 CROSS

For Complete Information  
Request Publication **11.03**

Mechanical-T Cross assemblies can be achieved with the use of two Style 920 or 920N of the same run size and the same or differing outlet size. Most sizes of Mechanical-T are available with either grooved or female threaded outlets. Your choice must be specified on each order.

**NOTE: Style 920 and Style 920N housings cannot be mated to achieve cross connections.**



# Hole Cut Piping System

## Vic-Let Strapless Outlet

### STYLE 923

For Complete Information  
Request Publication **11.05**



TYPICAL 100–200 mm/4–8" SIZES

Size	Max. Work Pressure	Dimensions						Approx. Weight Each
		Hole Dimensions		Vic-Let Dimensions				
Run × Branch Nominal Size mm Inches	kPa psi *	Hole Saw Size mm Inches	Max. Perm. Dia. mm Inches	T ** mm Inches	X mm Inches	Y *** mm Inches	kg Lbs.	
100 – 200 × 15 4 – 8 × ½	2065	38.1	39.6	63	76	78	0.9	
	300	1.50	1.56	2.47	3.00	3.09	1.9	
20	2065	38.1	39.6	62	76	78	0.7	
	300	1.50	1.56	2.44	3.00	3.09	1.6	
250 – larger × 15 10 – larger × ½	2065	38.1	39.6	63	76	76	0.9	
	300	1.50	1.56	2.47	3.00	3.00	1.9	
20	2065	38.1	39.6	62	76	76	0.7	
	300	1.50	1.56	2.44	3.00	3.00	1.6	

\* On schedule 40 pipe 100 – 200 mm/4 – 8" and Schedule 10 – 40 for sizes 250 mm/10" and larger. Minimum 4.2 mm/0.165", maximum 9.5 mm/0.375" wall thickness on large pipe or flat plate. Pressure rating is for Vic-Let outlet only, pipe used must also be rated at this pressure or higher. Pressure rating is 1375 kPa/200 psi for standard wall aluminum pipe.

\*\* Inside wall of run to engaged pipe end.

\*\*\* Width of collar is as supplied, width assembled changes due to collar deformation at assembly.

#### IMPORTANT NOTES:


Flow Data: Flow area equivalent to 20 mm/¾" pipe. Accepts 11 mm/⅞" diameter probe.

Warning: Always depressurize system and drain before disassembly.


**Due to deformation of the collar, Vic-Let outlet should not be re-used after initial installation.**



TYPICAL 250 mm/10" AND LARGER SIZES



TYPICAL 100–200 mm/4–8" SIZES



TYPICAL 250 mm/10" AND LARGER SIZES



- Fast, easy pipe outlet eliminates the need for welded outlets
- Pressure rated up to 2065 kPa/300 psi
- Standard wall pipe steel pipe for sizes 100–200 mm/4–8" and Schedules 10 – 40 steel pipe for sizes 250 mm/10" and larger

# Hole Cut Piping System

## Vic-O-Well Strapless Thermometer Outlet

### STYLE 924

For Complete Information  
Request Publication **11.06**



TYPICAL 100–200 mm/4–8" SIZES



TYPICAL 250 mm/10" AND LARGER SIZES

Size	Max. Work Pressure	Dimensions					Approx. Weight Each
		Hole Dimensions		Vic-O-Well Dimensions			
Run x Branch Nominal Size mm Inches	kPa psi*	Hole Saw Size mm Inches	Max. Perm. Dia. mm Inches	T** mm Inches	X mm Inches	Y*** mm Inches	kg Lbs.
100 – 200 for 150 mm Stem 4 – 8 for 6" Stem †	2065 300	38.1 1.50	39.6 1.56	76 3.00	180 7.09	78 3.09	1.1 2.4
250 – larger for 150 mm Stem 10 – larger for 6" Stem †	2065 300	38.1 1.50	39.6 1.56	76 3.00	180 7.09	78 3.09	1.0 2.3

\* On schedule 40 pipe 100–200 mm/4–8" and Schedule 10 – 40 for sizes 250 mm/10" and larger. Minimum 4.2 mm/0.165", maximum 9.5 mm/0.375" wall thickness on large pipe or flat plate. Pressure rating is for Vic-O-Well outlet only, pipe used must also be rated at this pressure or higher. Pressure rating is 1375 kPa/200 psi for standard wall aluminum pipe.

\*\* Inside wall of run to end of probe.

\*\*\* Width of collar is as supplied, width assembled changes due to collar deformation at assembly.


† 1 1/4" outlet – 1 1/4" – NEF18 – 2B.

#### IMPORTANT NOTES:

Flow Data: Flow characteristics for Vic-O-Well Style 924 and Vic-Let Style 923 are superior to standard welded or threaded outlets of equivalent branch sizes.

Warning: Always depressurize system and drain before disassembly.

**Due to deformation of the collar, Vic-O-Well thermometer and Vic-Let outlet should not be re-used after initial installation.**

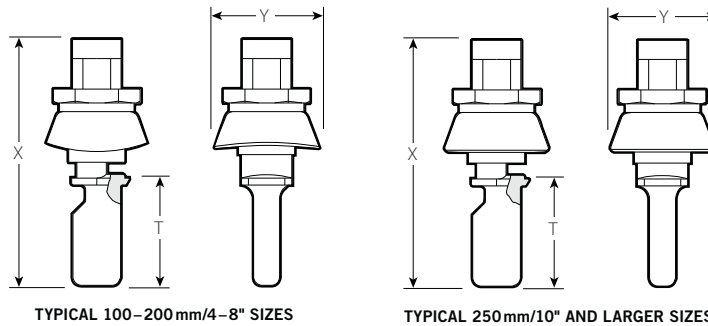

- Fast, easy connection combining features of thermowell and strapless mechanical outlet
- Eliminates the need for welded outlets
- Ideal for a variety of industrial glass thermometers with a 150 mm/6" nominal bulb length
- Provides 65 mm/2 1/2" for insulation and lagging
- Pressure rated up to 2065 kPa/300 psi on steel pipe
- Sizes from 100–200 mm/4–8" through 250 mm/10" and larger

# Plain End Piping System


The Victaulic plain end piping method is ideal for maintenance and repairs as well as new systems such as roof drains, slurries, tailings and oil field services. Roust-A-Bout couplings and plain end fittings are UL and ULC Listed for fire protection services.

Victaulic plain end couplings are primarily designed for use on standard weight steel pipe (Schedule 40), but may be used on lightwall steel or other metallic pipe such as aluminum or stainless steel. They are not intended for use on plastic pipe, plastic-coated pipe or brittle pipe, such as asbestos cement or cast iron. Nor are they intended for use on pipe with a surface hardness greater than 150 Brinell.



## Roust-A-Bout® Coupling


STYLE 99, PG. 7-3



*All illustrations shown are exaggerated for clarity*


### RELIABLE AND LEAK-FREE

- Pressure responsive gasket design seals under pressure or vacuum
- Standard gaskets cover most services
- Special gaskets available for many chemical services




### UNION AT EVERY JOINT

- Permits easy access to existing lines
- Removal of only two couplings permits removal of pipe, valves or equipment
- Permits rotation of pipe



### JAWS CONFORM TO PIPE

- Roust-A-Bout jaws are circumferentially curved to match pipe contour
- Provide greater pipe contact for positive grip
- Pinned into housing to prevent loss before installation



### ROUST-A-BOUT JAWS RIGID TO GRIP PIPE


- Set at right angle to the pipe for gripping efficiency



# Plain End Piping System

## Plain End Fittings Required Tangent Length


- Use chart to the right to figure out tangent length
- For use with Style 99 Roust-A-Bout couplings
- With plain end or beveled end pipe
- Cast of ductile iron and finished with a dip coat of enamel
- Request Publication 14.04

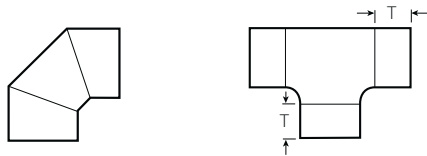


Size		Tangent Length
Nominal Size mm Inches	Actual Outside Dia. mm Inches	T Minimum mm Inches
40 1½	48.3 1.900	38 1.50
50 2	60.3 2.375	45 1.75
65 2½	73.0 2.875	45 1.75
80 3	88.9 3.500	45 1.75
90 3½	101.6 4.000	45 1.75
100 4	114.3 4.500	51 2.00
125 5	141.3 5.563	54 2.13

Size		Tangent Length
Nominal Size mm Inches	Actual Outside Dia. mm Inches	T Minimum mm Inches
165.1 mm	165.1 6.500	54 2.13
150 6	168.3 6.625	54 2.13
200 8	219.1 8.625	57 2.25
250 10	273.0 10.750	57 2.25
300 12	323.9 12.750	57 2.25
350 14	355.6 14.000	57 2.25
400 16	406.4 16.000	57 2.25


### Fittings



90° Elbow  
NO. 10P, PG. 7-4




45° Elbow  
NO. 11P, PG. 7-4




True Wye  
NO. 33P, PG. 7-5




Swaged Nipple  
NO. 53P, PG. 7-7



Tee  
NO. 20P, PG. 7-5



Reducing Tee  
NO. 25P, PG. 7-6




45° Lateral  
NO. 30P, PG. 7-6




Adapter Nipple  
Plain End × Thd.  
NO. 40P, PG. 7-8



Steel Bull Plug  
NO. 61P, PG. 7-5



Adapter Nipple  
Plain End × Grv.  
NO. 43P, PG. 7-8



Cross  
NO. 35P, PG. 7-5



Adapter Nipple  
Plain End × Bev.  
NO. 42P, PG. 7-8

### PRODUCTS


- 1-1 Couplings
- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System**
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software

# Plain End Piping System – Couplings

## Roust-A-Bout Coupling

### STYLE 99


For Complete Information Request Publication 14.02



- Specifically designed for plain end steel and stainless steel pipe
- Gripping teeth provide a strong component for joining plain and beveled end (including Schedule 80 steel pipe)
- Not to be used on plastic pipe, pipe with brittle linings, cast or ductile iron pipe nor any pipe with a surface hardness greater than 150 Brinell
- Pressure rated up to 5175 kPa/750 psi
- Sizes from 25–450 mm/1–18"

Size		Max. Work Pressure*	Max. End Load*	Dimensions			Approx. Weight Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	kPa psi	kg Lbs.	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
25	33.7	4130	3560	65	108	57	0.8
1	1.315	600	800	2.56	4.25	2.25	1.7
40	48.3	5175	9345	83	140	73	1.6
1 1/2	1.900	750	2100	3.25	5.50	2.88	3.6
50	60.3	5175	14685	95	171	86	2.4
2	2.375	750	3300	3.75	6.75	3.38	5.3
65	73.0	4130	17310	108	181	86	2.5
2 1/2	2.875	600	3890	4.25	7.13	3.38	5.7
76.1 mm	76.1	2700	12500	119	159	70	2.0
	3.000	400	2825	4.69	6.25	2.75	4.4
80	88.9	4130	25676	127	216	86	3.9
3	3.500	600	5770	5.00	8.50	3.38	8.7
90	101.6	3450	27946	140	235	92	4.8
3 1/2	4.000	500	6280	5.50	9.25	3.63	10.6
100	114.3	3100	31840	156	254	102	5.8
4	4.500	450	7155	6.13	10.00	4.00	12.8
139.7 mm	139.7	1700	26440	200	260	81	4.1
	5.500	250	5940	7.80	10.75	3.19	9.0
125	141.3	2400	37825	184	289	111	7.8
5	5.563	350	8500	7.25	11.38	4.38	17.3
165.1 mm	165.1	2065	44300	213	337	111	10.1
	6.500	300	9955	8.38	13.25	4.38	22.2
150	168.3	2065	46013	216	340	111	10.5
6	6.625	300	10340	8.50	13.38	4.38	23.2
200	219.1	1700	64970	276	365	127	16.9
8	8.625	250	14600	10.88	14.38	5.00	37.2
250	273.0	1700	101015	340	416	127	21.9
10	10.750	250	22700	13.38	16.38	5.00	48.2
300	323.9	1700	141955	394	499	130	27.2
12	12.750	250	31900	15.50	19.63	5.13	60.0
350	355.6	1400	137060	425	527	137	40.4
14	14.000	200	30800	16.75	20.75	5.38	89.0
400	406.4	1000	134390	483	575	137	47.6
16	16.000	150	30200	19.00	22.63	5.38	105.0
450	457.0	1000	169990	533	597	137	56.7
18	18.000	150	38200	21.00	23.50	5.38	125.0

\* Working Pressure and End Load are total, from all internal and external loads, based on coupling properly assembled, with bolts fully torqued to listed specifications, on plain end or beveled end standard weight (ANSI) steel pipe and Victaulic plain end fittings. Couplings are designed to be used with plain end pipe and Victaulic plain end fittings only.

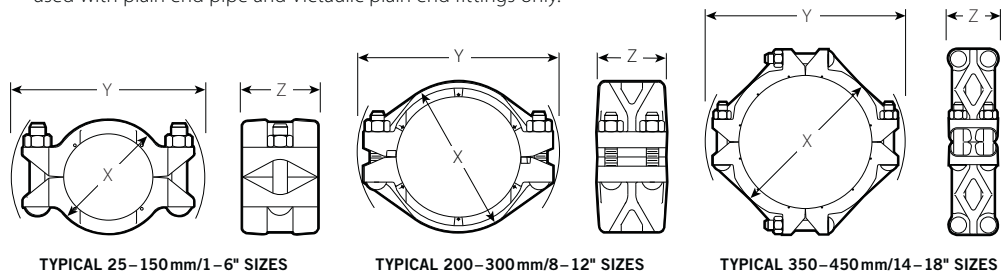


# Plain End Piping System – Fittings

## Elbow

**NO. 10P** 90° Elbow  
**NO. 11P** 45° Elbow  
 (Segmentally welded steel #)

For Complete  
 Information Request  
 Publication **14.04**



Size		No. 10P 90° Elbow		No. 11P 45° Elbow	
Nominal Size mm Inches	Actual Outside Dia. mm Inches	C to E mm Inches	Approx. Wgt. Each kg Lbs.	C to E mm Inches	Approx. Wgt. Each kg Lbs.
25 1	33.7 1.315	57 2.25 (d)	0.3 0.6	44 1.75 (d)	0.3 0.6
40 1½	48.3 1.900	102 4.00	0.6 1.4	73 2.88	0.5 1.0
50 2	60.3 2.375	121 4.75	1.3 2.9	80 3.13	0.6 1.4
65 2½	73.0 2.875	140 5.50	1.8 3.9	89 3.50	1.0 2.3
80 3	88.9 3.500	159 6.25	2.8 6.15	95 3.75	2.0 4.3
90 3½	101.6 4.000	178 7.00	3.2 7.0	102 4.00	2.5 5.5
100 4	114.3 4.500	197 7.75	4.5 9.9	108 4.25	3.2 7.0
125 5	141.3 5.563	241 9.50 (d)	9.3 20.4	130 5.13	8.2 18.0
150 6	168.3 6.625	165 6.50 (d)	9.3 20.4	89 3.50 (d)	5.4 11.9
200 8	219.1 8.625	254 10.00	19.1 42.0	152 6.00	12.9 28.5
250 10	273.0 10.750	292 11.50	22.7 50.0	165 6.50	18.6 41.0
300 12	323.9 12.750	343 13.50	70.8 156.0	178 7.00	26.2 57.8

# Segmentally welded steel except those marked (d) which are ductile iron.

# Plain End Piping System – Fittings

## Tee, Cross, True Wye, and Bull Plug


**NO. 20P** Tee

**NO. 35P (sw)** Cross


**NO. 33P (sw)** True Wye

**NO. 61P** Bull Plug  
(Ductile Iron#)


For Complete Information  
Request Publication **14.04**




NO. 20P



NO. 35P (SW)



NO. 33P (SW)



NO. 61P

Size		No. 20P Tee		No. 35P (sw) Cross		No. 33P (sw) True Wye			No. 61P Steel Bull Plug	
Nominal Size mm Inches	Actual Outside Dia. mm Inches	C to E mm Inches	Approx. Wgt. Each kg Lbs.	C to E mm Inches	Approx. Wgt. Each kg Lbs.	C to LE mm Inches	C to SE mm Inches	Approx. Wgt. Each kg Lbs.	E to E mm Inches	Approx. Wgt. Each kg Lbs.
25	33.7	57	0.5	83	0.8	83	57	0.5	76	0.3
1	1.315	2.25	1.0	3.25	1.7	3.25	2.25	1.1	3.00	0.7
40	48.3	70	0.8	102	1.6	102	70	0.8	89	0.5
1½	1.900	2.75 (sw)	1.7	4.00	3.5	4.00	2.75	1.8	3.50	1.2
50	60.3	83	1.4	108	2.4	108	70	1.3	102	0.9
2	2.375	3.25 (sw)	3.0	4.25	5.2	4.25	2.75	2.9	4.00	2.0
65	73.0	95	3.1	121	2.4	121	76	4.1	127	1.4
2½	2.875	3.75 (sw)	6.8	4.75	5.4	4.75	3.00	9.0	5.00	3.0
80	88.9	108	4.1	130	3.9	130	83	3.9	152	2.0
3	3.500	4.25 (sw)	9.0	5.13	8.5	5.13	3.25	8.5	6.00	4.5
90	101.6	140	5.7	140	4.1	140	89	4.5	165	2.7
3½	4.000	5.50 (sw)	12.5	5.50	9.0	5.50	3.50	10.0	6.50	6.0
100	114.3	127	5.4	149	4.9	149	95	6.4	178	3.4
4	4.500	5.00	11.9	5.88	10.8	5.88	3.75	14.0	7.00	7.5
125	141.3	175	7.8	175	9.1	175	102	9.8	216	5.2
5	5.563	6.88 (sw)	17.1	6.88	20.0	6.88	4.00	21.6	8.50	11.5
150	168.3	165	13.3	194	13.6	194	114	14.2	254	7.7
6	6.625	6.50	29.5	7.63	30.0	7.63	4.50	31.2	10.00	17.0
200	219.1	254	32.4	254	30.1	254	152	16.3	279	13.2
8	8.625	10.00 (sw)	71.5	10.00	66.4	10.00	6.00	36.0	11.00	29.0
250	273.0	292	52.6	292	46.7	292	165	23.6	330	21.8
10	10.750	11.50 (sw)	116.0	11.50	103.0	11.50	6.50	52.0	13.00	48.0
300	323.9	343	54.4	343	71.7	343	178	36.8	356	27.2
12	12.750	13.50 (sw)	120.0	13.50	158.0	13.50	7.00	81.2	14.00	60.0


# Ductile iron except those marked (sw) which are segmentally welded steel.

# Plain End Piping System – Fittings

## Reducing Tee

**NO. 25P**  
(Ductile Iron)

For Complete Information  
Request Publication **14.04**




**NO. 25P**

## 45° Lateral

**NO. 30P (SW)**  
(Segmentally Welded Steel)

For Complete Information  
Request Publication **14.04**



**NO. 30P (SW)**

Size			No. 25P Reducing Tee			
Nominal Size mm Inches			C to E mm Inches	Approx. Weight Each kg Lbs.		
40 1½	×	40 1½	×	25 1	102 4.00	1.0 2.2
50 2	×	50 2	×	25 1	108 4.25	1.3 2.9
				40 1½	108 4.25	1.4 3.1
80 3	×	80 3	×	25 1	130 5.13	3.0 6.7
				40 1½	130 5.13	3.1 6.9
				50 2	130 5.13	3.2 7.1
100 4	×	100 4	×	25 1	149 5.88	4.9 10.9
				40 1½	149 5.88	5.0 11.1
				50 2	149 5.88	5.1 11.3
				65 2½	149 5.88	5.3 11.6
				80 3	149 5.88	5.4 11.9
150 6	×	150 6	×	50 2	194 7.63	11.2 24.7
				80 3	194 7.63	11.5 25.4
				100 4	194 7.63	11.9 26.2
200 8	×	200 8	×	50 2	254 10.00	15.2 42.0
				80 3	254 10.00	20.0 44.0
				100 4	254 10.00	20.9 46.0
				125 5	254 10.00	21.8 48.0
				150 6	254 10.00	22.7 50.0
250 10	×	250 10	×	100 4	292 11.50	33.6 74.0
				150 6	292 11.50	35.4 78.0
				200 8	292 11.50	39.0 86.0
300 12	×	300 12	×	150 6	343 13.50	50.8 112.0
				200 8	343 13.50	53.5 118.0
				250 10	343 13.50	59.0 130.0


Size		No. 30P (sw) 45° Lateral		
Nominal Size mm Inches	Actual Outside Diameter mm Inches	C to LE mm Inches	C to SE mm Inches	Approx. Weight Each kg Lbs.
25 1	33.7 1.315	127 5.00	57 2.25	1.6 3.5
40 1½	48.3 1.900	159 6.25	70 2.75	1.6 3.5
50 2	60.3 2.375	184 7.25	70 2.75	2.3 5.1
65 2½	73.0 2.875	197 7.75	76 3.00	4.2 9.3
80 3	88.9 3.500	222 8.75	83 3.25	5.8 12.8
90 3½	101.6 4.000	254 10.00	89 3.50	9.1 20.0
100 4	114.3 4.500	263 10.75	95 3.75	8.6 19.0
125 5	141.3 5.563	324 12.75	102 4.00	13.6 30.0
150 6	168.3 6.625	356 14.00	114 4.50	19.6 43.3
200 8	219.1 8.625	457 18.00	152 6.00	41.7 92.0
250 10	273.0 10.750	527 20.75	165 6.50	48.1 106.0
300 12	323.9 12.750	622 24.50	178 7.00	75.8 167.0

# Plain End Piping System – Fittings

## Swaged Nipple

**NO. 53P**  
(Steel)

For Complete Information  
Request Publication **14.04**



**NO. 53P**

Size		No. 53P Swaged Nipple	
Nominal Size mm Inches		E to E mm Inches	Approx. Weight Each kg Lbs.
40 1½	x 25 1	114 4.50	0.6 1.2
		165 6.50	0.9 2.0
50 2	x 40 1½	165 6.50	0.9 2.0
		178 7.00	1.4 3.0
		178 7.00	1.4 3.0
65 2½	x 40 1½	178 7.00	1.4 3.0
		178 7.00	1.4 3.0
		203 8.00	2.0 4.5
80 3	x 40 1½	203 8.00	2.0 4.5
		203 8.00	2.0 4.5
		203 8.00	2.0 4.5
90 3½	x 80 3	203 8.00	3.1 6.8
		229 9.00	3.4 7.5
100 4	x 40 1½	229 9.00	3.4 7.5
		229 9.00	3.4 7.5
		229 9.00	3.4 7.5
		229 9.00	3.4 7.5
		229 9.00	3.4 7.5
		229 9.00	3.4 7.5
125 5	x 50 2	279 11.00	5.2 11.5
		279 11.00	5.2 11.5
		279 11.00	5.2 11.5

Size		No. 53P Swaged Nipple	
Nominal Size mm Inches		E to E mm Inches	Approx. Weight Each kg Lbs.
150 6	x 25 1	305 12.00	7.3 16.0
		305 12.00	7.3 16.0
		305 12.00	7.7 17.0
		305 12.00	7.7 17.0
		305 12.00	7.7 17.0
		305 12.00	7.7 17.0
		305 12.00	7.7 17.0
		305 12.00	7.7 17.0
200 8	x 80 3	330 13.00	13.2 29.0
		330 13.00	13.2 29.0
		330 13.00	13.2 29.0
		330 13.00	21.8 48.0
		330 13.00	21.8 48.0
		330 13.00	21.8 48.0
250 10	x 80 3	381 15.00	21.8 48.0
		381 15.00	21.8 48.0
		381 15.00	21.8 48.0
		381 15.00	21.8 48.0
		381 15.00	21.8 48.0
		381 15.00	21.8 48.0
300 12	x 150 6	406 16.00	26.8 59.0
		406 16.00	26.8 59.0
		406 16.00	26.8 59.0
		406 16.00	26.8 59.0

# Plain End Piping System – Fittings

## Adapter Nipple

**NO. 40P** Plain End × Thd.

**NO. 42P** Plain End × Bev.

**NO. 43P** Plain End × Grv.  
(Steel)


For Complete Information  
Request Publication **14.04**



**NO. 40P@**



**NO. 42P**



**NO. 43P**

Size		Dimensions		Approx. Weight Each
Nominal Size mm Inches	Actual Outside Diameter mm Inches	E to E mm Inches		kg Lbs.
25 1	33.7 1.315	76 3.00		0.4 0.9
40 1½	48.3 1.900	102 4.00		0.4 0.9
50 2	60.3 2.375	102 4.00		0.5 1.2
65 2½	73.0 2.875	102 4.00		0.9 1.9
80 3	88.9 3.500	102 4.00		1.1 2.5
100 4	114.3 4.500	152 6.00		2.5 5.4
150 6	168.3 6.625	152 6.00		4.3 9.4

@ Available with British Standard Pipe Threads, specify "BSP" clearly on order.

# Grooved System for Stainless Steel Pipe

- Fast, easy and reliable method for joining Sch. 5S, 10S or 40S stainless pipe
- Fittings are supplied with grooves, ready to install
- Couplings available for rigid or flexible joints



## Couplings

Rigid Coupling  
STYLE 489, PG. 8-3



Rigid Coupling  
STYLE 89, PG. 8-4  
AGS STYLE W89, PG. 5-5



Flexible Coupling  
STYLE 77S, PG. 8-5



Flexible Coupling  
STYLE 475, PG. 8-6



Vic-Flange Adapter  
ANSI Class 150  
STYLE 441, PG. 8-7





# Grooved System for Stainless Steel Pipe

## Fittings


### Type 316




90° Elbow  
NO. 410SS,  
PG. 8-8




45° Elbow  
NO. 411SS,  
PG. 8-8



Cap  
NO. 460SS,  
PG. 8-8



Tee  
NO. 420SS,  
PG. 8-8



Reducing Tee  
NO. 425SS,  
PG. 8-9



Concentric Reducer  
NO. 450SS,  
PG. 8-9

## Valves

### Butterfly Valve

SERIES 763, PG. 8-10



### Swinger Check Valve

SERIES 712S, PG. 8-12



### Vic-Ball Valve

SERIES 726S, PG. 8-13



## PRODUCTS

- 1-1 Couplings
- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe**
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software

# Grooved System for Stainless Steel Pipe – Couplings

## Rigid Coupling

### STYLE 489

For Complete Information  
Request Publication 17.25



- CF8M (316SS) stainless steel housing for corrosion resistance and strength
- Provides an essentially rigid joint
- Pressure rated up to 1200psi/4136kPa for Schedule 40S duplex or super duplex, 600psi/4136 kPa for Schedule 40S, 300psi/2065 kPa for Schedule 10S, and 200psi/1375 kPa for Schedule 5S;  
For specific pressure ratings by size and schedule, please refer to Publication 17.25
- Sizes from 40–300mm/1½–12"


Size		Max. End Load * N Lbs.				Allow. Pipe End Sep. * mm Inches	Dimensions			Approx. Wgt. Each kg Lbs.
Nominal Size mm Inches	Actual Outside Dia. mm Inches	Schedule 40S	Schedule 40††	Schedule 10S	Schedule 5S		X mm Inches	Y mm Inches	Z mm Inches	
40 1½	48.3 1.900	7565 1700	–	3783 850	2537 570	1.3 0.05	73 2.86	118 4.42	47 1.84	0.7 1.6
50 2	60.3 2.375	11837 2660	–	5919 1330	3961 890	1.3 0.05	85 3.34	132 5.19	47 1.86	0.7 1.6
65 2½	73.0 2.875	17355 3900	–	8678 1950	5785 1300	1.3 0.05	100 3.92	143 5.62	47 1.86	0.9 1.9
76.1 mm	76.1 3.000	18868 4240	–	9434 2120	6297 1415	1.3 0.05	102 4.02	145 5.72	47 1.86	0.9 2.0
80 3	88.9 3.500	25699 5775	–	12861 2890	8566 1925	1.3 0.05	115 4.54	172 6.78	47 1.86	1.3 2.8
100 4	114.3 4.500	42453 9540	–	21249 4775	14151 3180	4.8 0.19	147 5.77	201 7.90	53 2.07	1.8 4.0
139.7 mm	139.7 5.500	63413 14250	8273 1200††	31729 7130	21138 4750	6.4 0.25	180 7.07	283 11.13	60 2.38	5.5 12.0
150 6	168.3 6.625	92026 20680	184030 41370††	46015 10340	30685 6895	6.4 0.25	207 8.16	321 12.68	64 2.50	7.0 15.5
165.1 mm	165.1 6.500	88600 19910	8273 1200††	44300 9955	29548 6640	6.4 0.25	207 8.16	321 12.68	64 2.50	7.0 15.5
200 8	219.1 8.625	155995 35055	311870 70110††	78010 17530	52000 11685	6.4 0.25	270 10.63	381 15.00	70 2.75	10.9 24.0
216.3 mm	216.3 8.515	152079 34175	–	76051 17090	50686 11390	6.4 0.25	270 10.63	381 15.00	70 2.75	10.9 24.0
250 10	273.0 10.750	242345 54460	484500 108920††	121175 27230	80770 18150	6.4 0.25	332 13.09	438 17.25	76 3.00	15.0 33.0
267.4 mm	267.4 10.528	232424 52230	–	116212 26115	77475 17410	6.4 0.25	332 13.09	438 17.25	76 3.00	15.0 33.0
300 12	323.9 12.750	340890 76605	681520 153210††	170435 38300	113630 25535	6.4 0.25	384 15.13	486 19.13	80 3.13	18.1 40.0
318.5 mm	318.5 12.539	329745 74100	–	164873 37050	109915 24700	6.4 0.25	384 15.13	486 19.13	80 3.13	18.1 40.0

\* Refer to General Notes on pg. 1-3.

†† Cut grooved, sch. 40S duplex pipe

#### IMPORTANT NOTES:

Sizes shown are nominal DN sizes, except where actual mm sizes are shown.

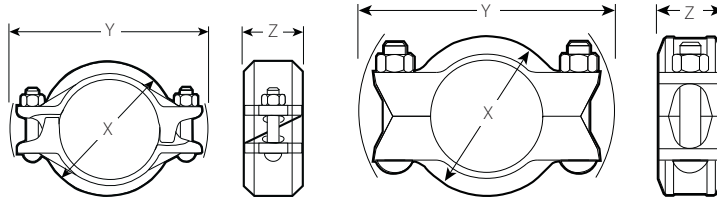

TYPICAL 40–100mm/1½–4" SIZES

TYPICAL 139.7–300mm/6–12" SIZES

# Grooved System for Stainless Steel Pipe – Couplings

## Rigid Coupling

### STYLE 89

For Complete Information  
Request Publication **17.24**



- Heavy-duty, galvanized ductile iron housing designed for use specifically with stainless steel systems
- Wider housing key than standard coupling
- Provides an essentially rigid joint
- Pressure rated up to 1200 psi/8273 kPa for Schedule 40S duplex or Standard Wall, 750 psi/5175 kPa for Schedule 40S, 300 psi/2065 kPa for Schedule 10S, and 200 psi/1375 kPa for Schedule 5S;  
For specific pressure ratings by size and schedule, please refer to Publication 17.24
- Sizes from 50–300 mm/2–12"


Size		Max. End Load *				Allow. Pipe End Sep. *	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	N Lbs.					mm Inches	X mm Inches	Y mm Inches	
		Schedule 40S	Schedule 40S Duplex †	Schedule 10S	Schedule 5S					
50 2	60.3 2.375	14774 3320	23676 5320	5919 1330	3961 890	3.6 0.14	89 3.50	168 6.68	51 2.00	1.4 3.1
65 2½	73.0 2.875	21694 4875	34712 7800	8678 1950	5785 1300	3.6 0.14	105 4.13	181 7.13	51 2.00	1.8 4.0
76.1 mm	76.1 3.000	23585 5300	37736 8480	9434 2120	6297 1415	3.6 0.14	105 4.13	184 7.25	51 2.00	1.9 4.1
80 3	88.9 3.500	32107 7215	51444 11560	12861 2890	8566 1925	3.6 0.14	121 4.75	197 7.75	51 2.00	2.0 4.3
100 4	114.3 4.500	53089 11930	84996 19100	21249 4775	14151 3180	6.4 0.25	152 6.00	245 9.63	54 2.13	3.4 7.5
139.7 mm	139.7 5.500	79299 17820	126916 28520	31729 7130	21138 4750	6.4 0.25	181 7.13	270 10.63	60 2.38	5.7 12.5
150 6	168.3 6.625	115035 25850	177200 39820	46015 10340	30685 6895	6.4 0.25	219 8.63	321 12.68	64 2.50	7.3 16.0
165.1 mm	165.1 6.500	110761 24890	184060 41360	44300 9955	29548 6640	6.4 0.25	219 8.63	321 12.68	60 2.38	7.2 15.8
200 8	219.1 8.625	155995 35055	304204 68360	78010 17530	52000 11685	6.4 0.25	279 11.00	381 15.00	70 2.75	11.8 26.1
216.3 mm	216.3 8.515	152079 34175	311940 70100	76051 17090	50686 11390	6.4 0.25	279 11.00	381 15.00	67 2.63	11.4 25.2
250 10	273.0 10.750	242345 54460	464848 104460	121175 27230	80770 18150	6.4 0.25	343 13.50	438 17.25	76 3.00	14.9 32.8
267.4 mm	267.4 10.528	232424 52230	484600 108900	116212 26115	77475 17410	6.4 0.25	340 13.38	432 17.00	700 2.75	14.7 32.5
300 12	323.9 12.750	340890 76605	659492 148200	170435 38300	113630 25535	6.4 0.25	397 15.63	499 19.63	73 2.88	20.9 46.0
318.5 mm	318.5 12.539	329745 74100	681740 153200	164873 37050	109915 24700	6.4 0.25	397 15.63	499 19.63	73 2.88	19.1 42.0
350 – 600 14 – 24	<b>AGS™</b> See Style W89, pg. 5-5, Request Publication 20.15									

\* Refer to General Notes on pg. 1-3.

† Cut grooved, Standard Wall or Schedule 40S stainless steel duplex pipe

#### IMPORTANT NOTES:

Sizes shown are nominal DN sizes, except where actual mm sizes are shown.



TYPICAL FOR ALL SIZES

# Grooved System for Stainless Steel Pipe – Couplings

## Flexible Coupling

### STYLE 77S

For Complete Information  
Request Publication 17.03



- CF8M (316SS) stainless steel housing for corrosion resistance and strength
- Provides rugged, flexible mechanical joint for grooved stainless steel piping systems
- Pressure dependent on pipe size and wall thickness
- Pressure rated up to 5175 kPa/750 psi for Schedule 40S, 3450 kPa/500 psi for Schedule 10S, and 2240 kPa/325 psi for Schedule 5S; For specific pressure ratings by size and schedule, please refer to Publication 17.03
- Sizes from 20–450 mm/¾–18"

Size		Max Perm. End Load				Allow. Pipe End Sep. *	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	N / Lbs.					mm Inches	X mm Inches	Y mm Inches	Z mm Inches
		Schedule 40S	Schedule 40††	Schedule 10S	Schedule 5S					
20 ¾	26.9 1.050	2893 650	–	1915 430	1245 280	0 – 1.6 0 – 0.06	53 2.08	99 3.89	43 1.70	0.6 1.2
25 1 ‡	33.7 1.315	4450 1000	7120 1600	3025 680	1960 440	0 – 1.6 0 – 0.06	65 2.54	114 4.50	42 1.66	0.8 1.8
32 1¼ ‡	42.4 1.660	7120 1600	11120 2500	4805 1080	3115 700	0 – 1.6 0 – 0.06	73 2.87	122 4.79	45 1.76	0.9 2.0
40 1½ ‡	48.3 1.900	9345 2100	15120 3400	6295 1415	4095 920	0 – 1.6 0 – 0.06	82 3.24	122 4.80	45 1.76	1.0 2.2
50 2 ‡	60.3 2.375	14685 3300	23757 5300	9855 2215	6408 1440	0 – 1.6 0 – 0.06	94 3.70	135 5.33	47 1.84	1.2 2.6
65 2½ ‡	73.0 2.875	21805 4900	34250 7700	14440 3245	9390 2110	0 – 1.6 0 – 0.06	107 4.20	147 5.79	47 1.84	1.4 3.0
80 3 ‡	88.9 3.500	32040 7200	51150 11500	17133 3850	10702 2405	0 – 1.6 0 – 0.06	123 4.83	178 6.99	47 1.84	1.9 4.1
100 4 ‡	114.3 4.500	28302 6360	84500 19000	24764 5565	15931 3580	0 – 3.2 0 – 0.13	151 5.93	229 9.00	52 2.06	3.1 6.8
150 6	168.3 6.625	46013 10340	–	30705 6900	19135 4300	0 – 3.2 0 – 0.13	211 8.30	281 11.06	52 2.06	3.9 8.5
200 8	219.1 8.625	77896 17525	–	32485 7300	19491 4380	0 – 3.2 0 – 0.13	229 11.38	374 14.74	62 2.44	10.7 23.5
250 10	273.0 10.750	121151 27225	–	30305 6810	20203 4540	0 – 3.2 0 – 0.13	343 13.50	440 17.33	67 2.63	15.0 33.0
300 12	323.9 12.750	170435 38300	–	71022 15960	42609 9575	0 – 3.2 0 – 0.13	394 15.50	486 19.15	65 2.56	15.9 35.0
350 14 †	355.6 14.000	137060 30800	–	68530 15400	44500 10000	0 – 3.2 0 – 0.13	421 16.56	519 20.44	71 2.81	16.8 37.0
400 16 †	406.4 16.000	111829 25130	–	40273 9050	31328 7040	0 – 3.2 0 – 0.13	481 18.94	572 22.52	75 2.94	24.0 53.0
450 18 †	457.0 18.000	113253 25450	–	45301 10180	33976 7635	0 – 3.2 0 – 0.13	540 21.25	625 24.62	78 3.06	25.0 62.0

\* Refer to General Notes on pg. 1-4.


‡ Sizes 25-100mm/1-4" come standard in CE8MN duplex stainless steel. 20mm/¾", 150-450mm/6-18" come standard in CF8M Type 316 Stainless Steel.

† Not for use with AGS (Advance Groove System) products.

†† Cut grooved, sch. 40S duplex.

#### IMPORTANT NOTES:

Sizes shown are nominal DN sizes, except where actual mm sizes are shown.

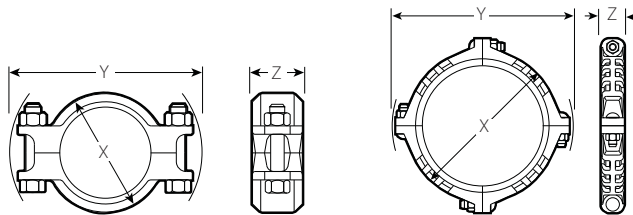

TYPICAL 20–350 mm/¾–14" SIZES

TYPICAL 400–450 mm/16–18" SIZES

# Grooved System for Stainless Steel Pipe – Couplings

## Flexible Coupling

### STYLE 475

For Complete Information  
Request Publication 17.14



Size		Max. End Load *			Allow. Pipe End Sep. *	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	N Lbs.				mm Inches	X mm Inches	Y mm Inches	Z mm Inches
		Schedule 40S	Schedule 10S	Schedule 5S					
25 1	33.7 1.315	4539 1020	3026 680	1958 440	0 – 1.6 0 – 0.06	62 2.45	111 4.36	41 1.63	0.7 1.6
32 1¼	42.4 1.660	7231 1625	4806 1080	3115 700	0 – 1.6 0 – 0.06	72 2.84	119 4.67	44 1.72	1.1 2.4
40 1½	48.3 1.900	9456 2125	6295 1415	4094 920	0 – 1.6 0 – 0.06	82 3.22	120 4.74	44 1.72	1.2 2.6
50 2	60.3 2.375	9857 2215	6898 1550	4450 1000	0 – 1.6 0 – 0.06	84 3.30	128 5.03	46 1.80	0.8 1.7
65 2½	73.0 2.875	14463 3250	10124 2275	6497 1460	0 – 1.6 0 – 0.06	99 3.88	142 5.59	46 1.80	0.9 1.9
76.1 mm	76.1 3.000	15731 3535	11014 2475	7076 1590	0 – 1.6 0 – 0.06	102 4.00	146 5.73	46 1.80	0.9 2.0
80 3	88.9 3.500	21405 4810	14997 3370	9657 2170	0 – 1.6 0 – 0.06	114 4.50	169 6.67	46 1.80	1.3 2.9
100 4	114.3 4.500	23007 5170	21250 4775	14150 3180	0 – 3.2 0 – 0.13	146 5.75	202 7.96	51 2.00	1.9 4.2
139.7 mm	139.7 5.500	21138 4750	21138 4750	13217 2970	0 – 3.2 0 – 0.13	173 6.81	228 8.97	51 2.00	2.2 4.9
165.1 mm ‡	165.1 6.500	29550 6640	29550 6640	18470 4150	0 – 3.2 0 – 0.13	200 7.87	268 10.53	51 2.00	3.1 6.8


- CF8M (316SS) stainless steel housing for corrosion resistance and strength
- Flexible system accommodates expansion/contraction/deflection
- Pressure rated up to 5175 kPa/750 psi for Schedule 40S, 3450 kPa/500 psi for Schedule 10S, and 2240 kPa/325 psi for Schedule 5S; For specific pressure ratings by size and schedule, please refer to Publication 17.14
- Sizes from 25–165.1 mm/1–4"

\* Refer to General Notes on pg. 1-4.

‡ Denotes JIS pipe size.

#### IMPORTANT NOTES:

Sizes shown are nominal DN sizes, except where actual mm sizes are shown.



TYPICAL FOR ALL SIZES

# Grooved System for Stainless Steel Pipe – Couplings

## Vic-Flange Adapter ANSI Class 150

### STYLE 441

For Complete Information  
Request Publication 17.27




Size		Max. End Load *	Sealing Surface		Dimensions				Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches		A Min. mm Inches	B Max. mm Inches	W mm Inches	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
50	60.3	5429	61	86	174	152	121	21	1.4
2	2.375	1220	2.40	3.40	6.84	6.00	4.75	0.82	3.0
65	73.0	7943	74	99	196	178	140	22	2.0
2½	2.875	1785	2.90	3.90	7.72	7.00	5.50	0.88	4.3
80	88.9	11770	89	114	209	191	152	24	2.2
3	3.500	2645	3.50	4.50	8.22	7.50	6.00	0.94	4.8
100	114.3	19469	114	140	247	229	191	24	3.1
4	4.500	4375	4.50	5.50	9.72	9.00	7.50	0.94	6.9
150	168.3	30683	168	198	299	279	241	25	4.3
6	6.625	6895	6.60	7.80	11.78	11.00	9.50	1.00	9.5

\* Refer to Publication 17.27 for more details.

#### IMPORTANT NOTE:

For restrictions on where and how Vic-Flange adapters and flange washers can be used, refer to Publication 17.27.



#### TYPICAL FOR ALL SIZES

Orange area of mating face must be free from gouges, undulations or deformities of any type for effective sealing.

- Designed to directly incorporate stainless flanged components with ANSI Class 150 bolt hole patterns into grooved stainless steel pipe system
- Pressure rated up to 1380 kPa/200psi for Schedule 40S, and 1900 kPa/275 psi for Schedules 10S and 5S; For specific pressure ratings by size and schedule, please refer to Publication 17.27
- Sizes from 50–150 mm/2–6"

# Grooved System for Stainless Steel Pipe – Fittings

## Type 316L Fittings #


No. 410 SS 90° Elbow

No. 411 SS 45° Elbow


No. 420 SS Tee

No. 460 SS Cap


For Complete Information  
Request Publication 17.16




No. 410 SS



No. 411 SS



No. 420 SS



No. 460 SS

Size	No. 410 SS 90° Elbow		No. 411 SS 45° Elbow		No. 420 SS Tee		No. 460 SS Cap	
	Nominal Size mm Inches	C to E mm Inches	Approx. Weight Each kg Lbs.	C to E mm Inches	Approx. Weight Each kg Lbs.	C to E mm Inches	Approx. Weight Each kg Lbs.	T Thickness Actual mm
26.9 ¾	—	—	—	—	—	—	20.0 0.79	0.05 0.12
33.7 1	73.2 2.88*	0.3 0.7	50.8 2.00*	0.3 0.6	—	—	20.0 0.79	0.08 0.18
42.4 1¼	79.5 3.13	0.5 1.0	50.8 2.00*	0.4 0.8	—	—	20.0 0.79	0.10 0.26
48.3 1½	88.9 3.50*	0.6 1.3	55.6 2.19*	0.4 1.0	113.6 3.38*	1.0 2.2	20.0 0.79	0.20 0.38
60.3 2	114.3 4.50*	1.0 2.2	69.9 2.75*	0.7 1.6	69.6 2.75*	1.1 2.4	25.0 0.98	0.30 0.57
73.0 2½	127 5.00*	1.5 3.3	71.4 2.81*	1.0 2.2	78.0 3.07*	1.7 3.7	27.0 1.08	0.40 0.90
88.9 3	114.3 4.50	1.2 2.6	50.8 2.00	0.6 1.3	95.7 3.77	0.4 3.1	26.0 1.03	0.50 1.10
114.3 4	152.4 6.00	2.1 4.7	63.5 2.50	2.5 2.3	113.6 4.47	2.2 4.9	31.1 1.22	0.80 1.80
168.3 6	228.6 9.00	5.0 11.0	95.3 3.75	2.5 5.5	150.00 5.91	5.3 11.7	44.0 1.75	1.80 4.00
219.1 8	304.8 12.00	9.6 21.2	127 5.00	5.0 11.0	197.8 7.79	9.3 20.4	57.0 2.23	3.20 7.00
273.0 10	381 15.00	16.6 36.6	158.8 6.25	8.4 18.5	225.9 8.89	15.6 34.4	69 2.72	8.10 17.8
323.9 12	457.2 18.00	25.8 59.6	190.5 7.50	12.9 28.4	264.0 10.39	23.8 52.4	83 3.17	12.10 26.7

### Important Notes:

Schedule 10S, Type 304 or 316 stainless steel, roll grooved from material conforming to ASTM A-403.

\*Schedule 10S, Grade CF8M (Type 316 stainless steel) conforming to ASTM A-351, A743 and A-744.


- Offered in a variety of standard fitting configurations
- Sizes to 300mm/12”

# Grooved System for Stainless Steel Pipe – Fittings

## Type 316L Concentric Reducer

No. 450 SS

For Complete Information  
Request Publication **17.16**



No. 450 SS

Size		No. 450 SS Concentric Reducer	
Nominal Size mm Inches		E to E mm Inches	Approx. Weight Each kg Lbs.
50 2	× 40 1½	127 5.00	1.1 2.5
65 2½	× 50 2	127 5.00	0.49 1.1
80 3	× 65 2½	127 5.00	0.7 1.5
100 4	× 80 3	127 5.00	0.9 2.0
150 6	× 80 3	139.7 5.50	3.1 6.9
	× 100 4	139.7 5.50	3.2 7.0
200 8	× 100 4 (sw)	152.4 6.00	1.9 4.2
	× 150 6	152.4 6.00	3.2 7.0
250 10	× 150 6 (sw)	177.8 7.00	8.2 18.0
	× 200 8 (sw)	177.8 7.00	8.9 19.6
300 12	× 200 8 (sw)	203.2 8.00	12.0 26.4
	× 250 10 (sw)	203.2 8.00	12.9 28.4

**Important Note:**

Schedule 10S, Type 304 or 316 stainless steel, roll grooved from material conforming to ASTM A-403.


\*Schedule 10S, Grade CF8M (Type 316 stainless steel) conforming to ASTM A-351, A743 and A-744.

(sw) Segmentally welded, not CR class fitting. Exception is 8"x4" concentric reducers which are CR class.

## Type 316L Reducing Tee

No. 425 SS

For Complete Information  
Request Publication **17.16**



No. 425 SS

Size			No. 425 SS Reducing Tee		
Nominal Size mm Inches			C to E Run mm Inches	C to E Branch mm Inches	Approx. Weight Each kg Lbs.
50 2	× 50 2	× 40 1½	70.0 2.75	70.0 2.75	0.9 2.0
65 2½	× 65 2½	× 50 2	77.9 3.07	77.9 3.07	1.1 2.4
80 3	× 80 3	× 65 2½	95.7 3.77	82.0 3.23	1.4 3.1
100 4	× 100 4	× 80 3	113.5 4.47	98.5 3.88	2.2 4.9
		× 150 6	150.0 5.91	123.9 4.88	4.0 8.8
150 6	× 150 6	× 100 4	150.0 5.91	130.0 5.12	4.3 9.5
		× 200 8	197.8 7.79	160.2 6.31	8.2 18.1
200 8	× 200 8	× 100 4	197.8 7.79	168.1 6.62	8.4 18.5
		× 150 6	225.8 8.89	195.5 7.70	12.8 28.2
250 10	× 250 10	× 150 6	225.8 8.89	218.1 8.59	14.2 31.3
		× 200 8	263.9 10.39	241.5 9.51	18.2 40.1
300 12	× 300 12	× 200 8	263.9 10.39	251.2 9.89	21.6 47.6
		× 250 10	263.9 10.39	251.2 9.89	21.6 47.6

**Important Note:**

No. 425 SS is manufactured from material conforming to ASTM A-403 Schedule 10S 304L or 316L.

SECTION 8: GROOVED SYSTEM FOR SS PIPE



# Grooved System for Stainless Steel Pipe – Valves


## Butterfly Valve

### SERIES 763


For Complete Information  
Request Publication 17.23




SERIES 763  
WITH LEVER HANDLE

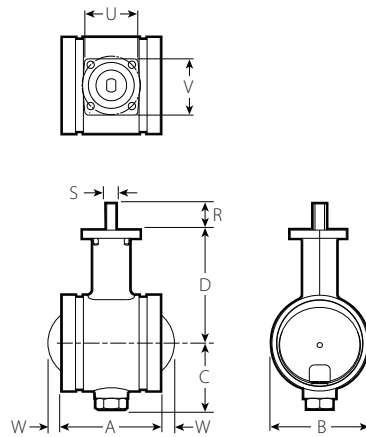


SERIES 763 BUTTERFLY VALVE BARE  
TYPICAL FOR ALL SIZES

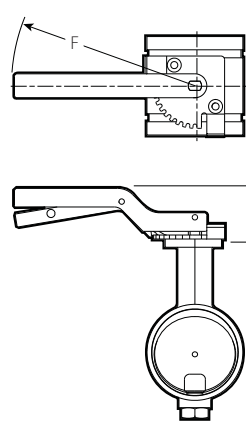

SERIES 763 BUTTERFLY VALVE  
WITH LEVER LOCK HANDLE  
TYPICAL FOR ALL SIZES



ENLARGED MOUNTING FLANGE  
TYPICAL 50-200mm/2-8" SIZES  
(VALVE SHOWN CLOSED)



ENLARGED MOUNTING FLANGE  
TYPICAL 250mm/10" SIZES  
(VALVE SHOWN CLOSED)

### BARE VALVE AND WITH LEVER LOCK HANDLE

Size		Dimensions														Approx. Wgt. Each		Flow Coefficient@ (Fully Open) K <sub>v</sub> Values C <sub>v</sub> Values
Nominal Size mm Inches	Actual Out. Dia. mm Inches	A mm Inches	B mm Inches	C mm Inches	D mm Inches	E mm Inches	F mm Inches	P mm Inches	Q mm Inches	R mm Inches	S mm Inches	T mm Inches	U mm Inches	V mm Inches	W mm Inches	Bare Valve kg Lbs.	Lever Handle kg Lbs.	
50 2	60.3 2.375	81 3.20	60 2.37	53 2.09	106 4.17	60 2.38	216 8.51	9 0.34	70 2.76	32 1.25	8 0.31	11 0.43	63 2.48	67 2.65	—	1.6 3.5	2.1 4.7	95.2 110
65 2½	73.0 2.875	96 3.77	76 3.00	63 2.47	111 4.38	60 2.38	216 8.51	9 0.34	70 2.76	31 1.25	8 0.31	11 0.43	63 2.48	67 2.65	—	2.0 4.5	2.6 5.7	173.0 200
76.1 mm	76.1 3.000	96 3.77	76 3.00	63 2.47	111 4.38	60 2.38	216 8.51	9 0.34	70 2.76	31 1.25	8 0.31	11 0.43	63 2.48	67 2.65	—	2.0 4.5	2.6 5.7	173.0 200
80 3	88.9 3.500	96 3.77	89 3.50	66 2.60	126 4.97	60 2.38	216 8.51	9 0.34	70 2.76	31 1.23	8 0.31	11 0.43	63 2.48	67 2.65	—	2.3 5.0	2.8 6.2	216.3 250
100 4	114.3 4.500	118 4.64	115 4.52	80 3.14	135 5.33	60 2.38	216 8.51	9 0.34	70 2.76	31 1.23	11 0.43	16 0.63	63 2.47	67 2.65	—	4.1 9.0	4.6 10.2	519.0 600
165.1 mm	165.1 6.500	149 5.88	169 6.64	121 4.76	184 7.25	35 1.37	305 12.01	11 0.43	102 4.02	35 1.37	13 0.50	19 0.75	89 3.51	98 3.85	—	11.8 26.0	12.9 28.4	1211.0 1400
150 6	168.3 6.625	149 5.88	169 6.64	121 4.76	184 7.25	35 1.37	305 12.01	11 0.43	102 4.02	35 1.37	13 0.50	19 0.75	89 3.51	98 3.85	—	11.8 26.0	12.9 28.4	1211.0 1400
200 8	219.1 8.625	135 5.32	248 9.75	145 5.73	218 8.57	35 1.37	305 12.01	11 0.43	102 4.02	35 1.37	19 0.75	25 1.00	86 3.40	98 3.85	32 1.24	18.6 41.0	19.7 43.4	2941.0 3400
250 10	273.0 10.750	163 6.40	307 12.10	179 7.05	256 10.09	—	—	13 0.53	125 4.92	54 2.13	—	32 1.25	117 4.62	121 4.77	44 1.72	29.5 65.0	—	4757.5 5500

- Stainless steel body with cast neck to accommodate insulation requirements
- ISO top flange will accept mounting of all major manual and power operators
- Seat options include EPDM, nitrile, fluoroelastomer, and lubricated nitrile (air and gas services only)
- Disc is stainless steel and provides bubble-tight shut-off at full rated pressure and temperature
- Pressure rates 2065kPa/300psi bi-directional and dead-end service
- Sizes from 50–250mm/2–10"

@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/+60°F with valve fully open.



SERIES 763  
WITH POWER ACTUATOR




SERIES 763  
WITH GEAR OPERATOR

# Grooved System for Stainless Steel Pipe – Valves

## Butterfly Valve

### SERIES 763

For Complete Information  
Request Publication 17.23



TYPICAL FOR ALL SIZES

### ALUMINUM GEAR OPERATOR

Size		Dimensions						Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	G mm Inches	H mm Inches	K mm Inches	L mm Inches	M mm Inches	N mm Inches	kg Lbs.
50 2	60.3 2.375	92 2.64	44 1.75	178 7.00	109 4.29	40 1.58	100 3.94	3.4 7.4
65 2½	73.0 2.875	92 2.64	44 1.75	182 7.18	109 4.29	40 1.58	100 3.94	3.8 8.4
76.1 mm	76.1 3.000	92 2.64	44 1.75	182 7.18	109 4.29	40 1.58	100 3.94	3.8 8.4
80 3	88.9 3.500	92 2.64	44 1.75	197 7.77	109 4.29	40 1.58	100 3.94	4.0 8.9
100 4	114.3 4.500	112 4.43	58 2.28	227 8.93	118 4.65	50 1.97	125 4.92	5.9 12.9
165.1 mm	165.1 6.500	160 6.30	82 3.25	320 12.62	197 7.75	73 2.87	200 7.87	15.1 33.2
150 6	168.3 6.625	160 6.30	82 3.25	320 12.62	197 7.75	73 2.87	200 7.87	15.1 33.2
200 8	219.1 8.625	160 6.30	82 3.25	354 13.95	197 7.75	73 2.87	200 7.87	21.9 48.2
250 10	273.0 10.750	160 6.30	82 3.25	393 15.47	197 7.75	73 2.87	200 7.87	33.6 74.0

### STAINLESS STEEL GEAR OPERATOR

Size		Dimensions						Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	G mm Inches	H mm Inches	K mm Inches	L mm Inches	M mm Inches	N mm Inches	kg Lbs.
50 2	60.3 2.375	100 3.93	71 2.80	185 7.28	130 5.13	56 2.22	100 3.94	2.0 6.4
65 2½	73.0 2.875	100 3.93	71 2.80	190 7.49	130 5.13	56 2.22	100 3.94	3.4 7.4
76.1 mm	76.1 3.000	100 3.93	71 2.80	190 7.49	130 5.13	56 2.22	100 3.94	3.4 7.4
80 3	88.9 3.500	100 3.93	71 2.80	205 8.08	130 5.13	56 2.22	100 3.94	3.6 7.9
100 4	114.3 4.500	125 4.92	71 2.80	239 9.42	135 5.32	56 2.22	150 5.90	5.4 11.9
165.1 mm	165.1 6.500	167 6.59	90 3.54	328 12.92	229 9.00	75 2.97	215 8.46	14.6 32.2
150 6	168.3 6.625	167 6.59	90 3.54	328 12.92	229 9.00	75 2.97	215 8.46	14.6 32.2
200 8	219.1 8.625	167 6.59	90 3.54	362 14.24	229 9.00	75 2.97	215 8.46	21.4 47.2
250 10	273.0 10.750	237 9.33	102 4.02	451 17.76	204 8.03	94 3.70	315 12.40	36.6 80.4

# Grooved System for Stainless Steel Pipe – Valves


## Swinger Check Valve

### SERIES 712S

For Complete Information  
Request Publication **17.08**



- Series 712S Swinger Check valves must not be installed in vertical pipe lines
- Supplied with bonnet cap drilled and tapped with 15 mm/½" NPT pipe plug for chemical injection or other auxiliary connections
- Type 316 stainless steel body and trim in 50mm/2" size



TYPICAL FOR 50mm/2" SIZE

Size		Dimensions					Approx. Weight Each without Operator
Nominal Size mm Inches	Actual Outside Diameter mm Inches	A End to End mm Inches	C mm Inches	D mm Inches	E mm Inches	F mm Inches	kg Lbs.
50 2	60.3 2.375	229 9.00	45 1.75	124 4.88	86 3.38	162 6.38	5.4 12.0

# Grooved System for Stainless Steel Pipe – Valves

## Vic-Ball Valve


### SERIES 726S

For Complete Information  
Request Publication 17.22




Size		Dimensions											Approx. Wgt. Each	Flow Coefficient@ (Fully Open)
Nominal Size mm Inches	Actual Out. Dia. mm Inches	A mm Inches	B mm Inches	C mm Inches	D mm Inches	DA mm Inches	E mm Inches	F mm Inches	H mm Inches	J mm Inches	K mm Inches	L mm Inches	kg Lbs.	K <sub>v</sub> Values C <sub>v</sub> Values
40 1½	48.3 1.900	130 5.12	51 2.00	60 2.36	32 1.25	38 1.50	45 1.78	48 1.90	76 3.00	7 0.28	14 0.56	177 6.97	2.2 4.0	112.5 130
50 2	60.3 2.375	140 5.50	67 2.64	63 2.48	38 1.50	51 2.00	57 2.25	60 2.38	84 3.31	9 0.34	14 0.56	177 6.97	3.4 7.5	155.7 180
65 2½	73.0 2.875	159 6.25	77 3.03	71 2.80	50 1.97	64 2.50	69 2.72	73 2.88	102 4.00	9 0.34	14 0.56	250 9.84	5.3 11.6	294.1 340
80 3	88.9 3.500	167 6.56	89 3.50	80 3.15	64 2.50	76 3.00	85 3.34	89 3.50	115 4.53	9 0.34	14 0.56	250 9.84	7.8 17.2	519.0 600
100 4	114.3 4.500	210 8.25	—	85 3.35	76 2.99	102 4.00	111 4.33	115 4.52	139 5.48	9 0.34	15 0.61	398 15.67	20.5 45.0	562.3 650
150 6	168.3 6.625	257 10.10	—	115 4.53	102 4.00	152 6.00	164 6.46	169 6.64	165 6.48	9 0.34	15 0.61	459 18.07	37.3 82.0	692.0 800

@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/+60°F with valve fully open.

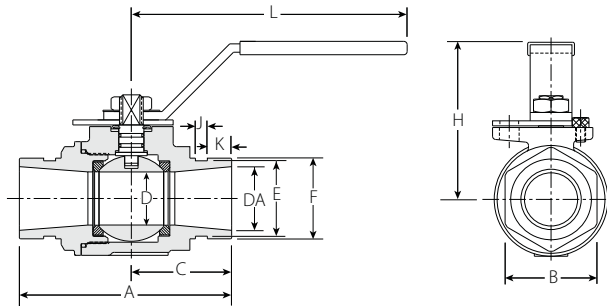

TYPICAL 40–80mm/1½–3" SIZES

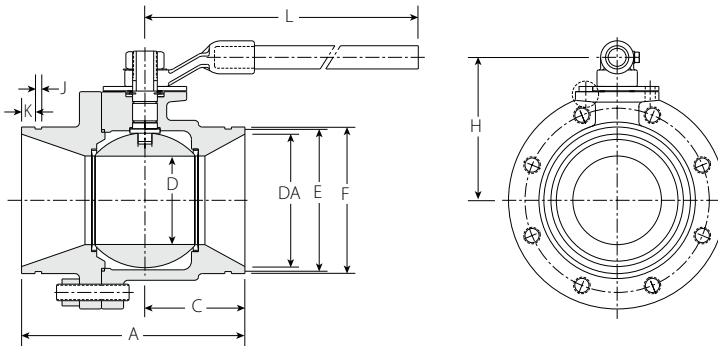

TYPICAL 100mm/4" AND 150mm/6" SIZES

- High-pressure standard port ball valve with grooved ends
- Two-piece, end-entry features floating ball for lower torque requirements
- NACE compliant
- Streamline internal design provides excellent flow characteristics
- Valve features stainless steel ball and stem
- Pressure rated up to 6900kPa/1000psi for sizes 40–80mm/1½–3"
- Pressure rated up to 5515kPa/800psi for sizes 100–150mm/4–6"
- Sizes from 40–150mm/1½–6"



# Pressfit System for Stainless Steel Pipe

AVAILABLE IN AUSTRALIA  
AND NEW ZEALAND ONLY

The Pressfit system is a small diameter, quick-connect piping system solution that delivers speed, economy and reliability to building owners, contractors, and specifying engineers.

Pressfit delivers real on-the-job pipe joining advantages to fitters and installers – benefits that you won't find in standard threaded, welded or flanged systems.

The Pressfit system is ideal for a wide variety of process and utility applications requiring the corrosion-resistant properties of stainless steel. Pressfit integrates well with larger stainless steel piping systems, especially those designed with our grooved end products.




## Product Line




Standard Coupling, pg. 9-4




Slip Coupling, pg. 9-4




90° Elbow, pg. 9-5




Short Tangent 90° Elbow, pg. 9-5



45° Elbow, pg. 9-5




Tee, pg. 9-6



Tee with Thd. Branch, pg. 9-6

Pressfit	<b>304</b>	Style 597		Style 590	Style 586	Style 591	Style 592	Style 588
	<b>316</b>	Style 507	Style 508	Style 570	Style 568	Style 571	Style 572	Style 578



Tee with Reducing Branch, pg. 9-7



Male Adapter, pg. 9-7




Female Thd. Adapter, pg. 9-8



Weld Adapter, pg. 9-8



Threaded Union, pg. 9-8



Grooved End Union, pg. 9-9



Flange Adapter, pg. 9-9

Pressfit	<b>304</b>	Style 593	Style 596	Style 599	Style 561	Style 584	Style 547	Style 595
	<b>316</b>	Style 573	Style 576	Style 579		Style 585	Style 548	Style 575



Van Stone Flange Adapter, pg. 9-9




Transition Nipple, pg. 9-10



Reducer Insert, pg. 9-10



Concentric Reducer, pg. 9-10




Ball Valve, pgs. 9-11, 12

Pressfit	<b>304</b>	Style 565	Style 587	Style 582	Style 594	Style 589
	<b>316</b>	Style 566	Style 577	Style 583	Style 574	Style 569

# Pressfit System for Stainless Steel Pipe

AVAILABLE IN AUSTRALIA  
AND NEW ZEALAND ONLY

## How It Works

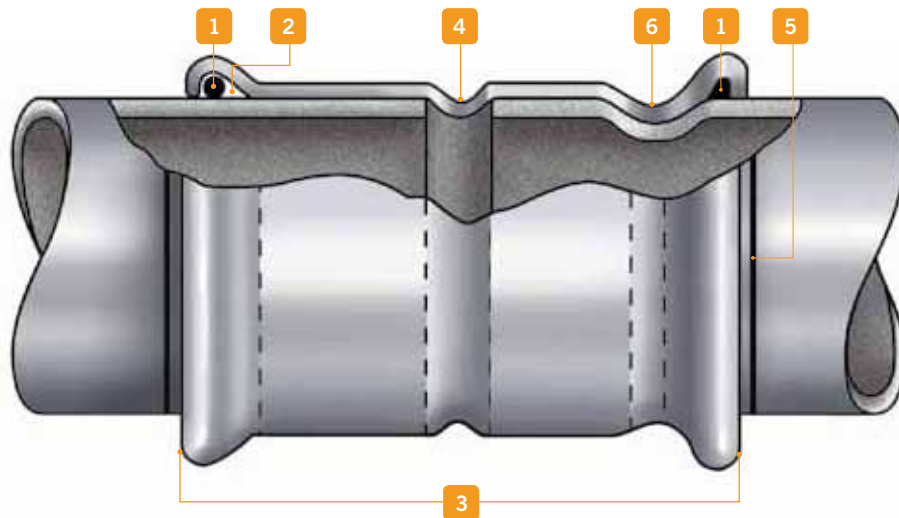

### 1 O-ring

Precisely molded gasket made of synthetic rubber in several application grades for a variety of wet and dry services.

### 2 O-ring pocket

Sized to contain the ring before assembly, the pocket is deformed around the o-ring during compression to fully surround the pipe for a leak-free seal.

### 3 Housing

Precision formed stainless steel construction incorporating the pipe stop and o-ring. Adapters are available for easy field make-up of fitting combinations to threaded components.

### 4 Pipe stop

An internal pipe stop locates pipe position to ensure positive joining.

### 5 Insertion mark

A witness mark on the pipe ensures visual verification that the pipe has been fully inserted for proper installation.

### 6 Tool indent

The Pressfit hand tool engages the entire circumference of the bead on the fitting housing to ensure a secure attachment of pipe to fitting.



## Pressfit Tools



PFT 509



PFT 505

The Pressfit System requires a Pressfit tool designed for securing Pressfit products onto pipe. The Pressfit tool packages include the actual pressing tool and any customer-specified press jaws. Jaws are available separately for rental or purchase. The PFT505 and PFT509 Pressfit tools are designed for industrial and trade use only. See pg. 17-11 for more details.

# Pressfit System for Stainless Steel Pipe

AVAILABLE IN AUSTRALIA  
AND NEW ZEALAND ONLY

## Stainless Steel Pipe System – Performance

- Available for Type 304 or Type 316 stainless steel systems
- Full range of couplings, fittings and valves
- Handheld tools used to join pipe in seconds
- Up to four times faster than stainless steel socket weld systems
- UL classified in accordance with ANSI/NSF 61 for cold +86°F/+30°C and hot +180°F/+82°C potable water service
- Meets hanging requirements of ASME B31.1, B31.3 and B31.9
- Request Publication 18.01 for Type 316 or 18.02 for Type 304
- Pressure rated up to 300 psi/2065 kPa in all sizes
- Sizes from ½–2" 15–50 mm Schedule 5 stainless steel piping is fast, easy, clean and reliable method for joining


### PRODUCTS

- 1-1 Couplings
- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe


### 9-1 Pressfit System for Stainless Steel Pipe

- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software

## Vic-Press 304

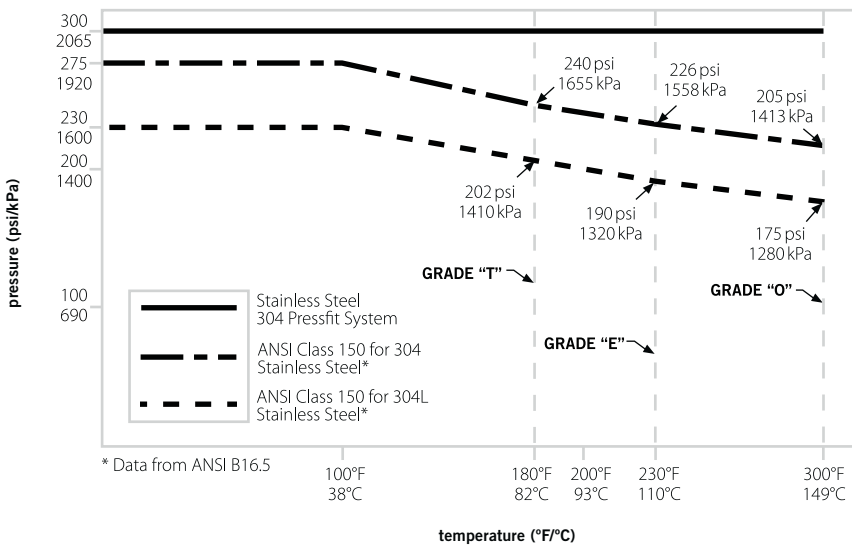

## Vic-Press 316

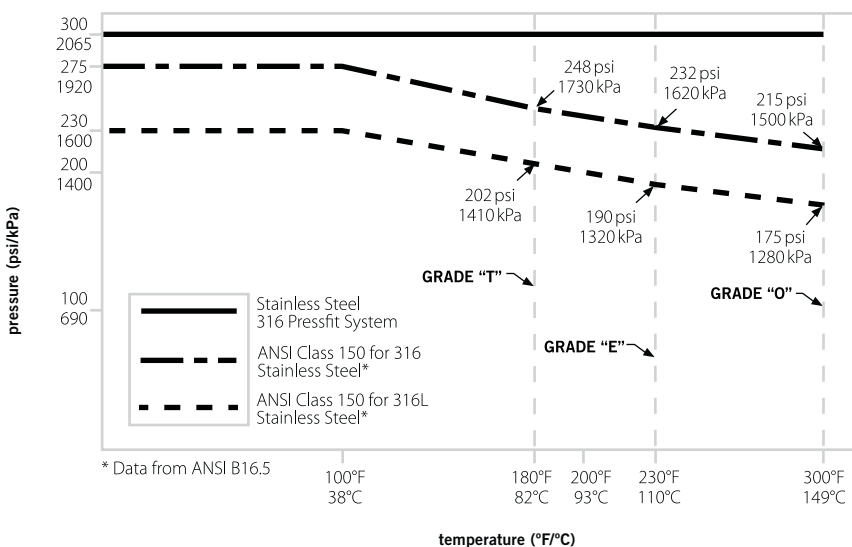




# Pressfit System for Stainless Steel Pipe

AVAILABLE IN AUSTRALIA AND NEW ZEALAND ONLY

## Dimensional Information

Products in the Vic-Press 304/316 System have unique center-to-end or end-to-end dimensions which incorporate specific, uniform “takeout” dimensions for easy fabrication calculations.

Use of threaded products employing special features such as probes, escutcheon cups, etc., should be checked to be certain the thread standard and length of insertion are compatible with fitting dimensions. Failure to verify dimensional suitability in advance may result in difficulties in assembly.




### END TYPE CODE

- P = Pressfit
- F = Female Pipe Thread
- M = Male Pipe Thread
- T = Plain End
- L = Flanged
- G = Grooved

## Standard Coupling

Style 597 (P x P)  
Style 507 (P x P)



Style 597 & 507


Size		Dimensions		Approx. Weight Each
Nominal Size mm Inches	Actual Outside Diameter mm Inches	E to E mm Inches	U Takeout mm Inches	kg Lbs.
15	21.3	51	9	0.1
1/2	0.840	2.00	0.35	0.1
20	26.7	55	7	0.1
3/4	1.050	2.17	0.28	0.2
25	33.7	62	10	0.1
1	1.315	2.44	0.39	0.2
40	48.3	80	8	0.2
1 1/2	1.900	3.15	0.32	0.5
50	60.3	100	8	0.3
2	2.375	3.94	0.33	0.7

standard coupling

Pressfit	<b>304</b>	Style 597	Request Publication 18.02
	<b>316</b>	Style 507	Request Publication 18.01

## Slip Coupling

Style 508 (P x P)



Style 508

Size		Dimensions		Approx. Weight Each
Nominal Size mm Inches	Actual Outside Diameter mm Inches	E to E mm Inches	I Min. Tube Insert mm Inches	kg Lbs.
15	21.3	84	25	0.1
1/2	0.840	3.31	1.00	0.1
20	26.7	90	25	0.1
3/4	1.050	3.54	1.00	0.2
25	33.7	100	25	0.1
1	1.315	3.94	1.00	0.3
40	48.3	120	25	0.3
1 1/2	1.900	4.72	1.00	0.6
50	60.3	140	32	0.4
2	2.375	5.51	1.25	0.9

slip coupling

Pressfit	<b>316</b>	Style 508	Request Publication 18.01
----------	------------	-----------	---------------------------

# Pressfit System for Stainless Steel Pipe

AVAILABLE IN AUSTRALIA  
AND NEW ZEALAND ONLY

## Elbows

**Style 590** 90° Elbow (P × P)


**Style 570** 90° Elbow (P × P)

**Style 586** Short Tangent 90° Elbow (P × P)


**Style 568** Short Tangent 90° Elbow (P × P)

**Style 591** 45° Elbow (P × P)


**Style 571** 45° Elbow (P × P)



Style 590 & 570



Style 586 & 568



Style 591 & 571

Size		Style 590 & 570 90° Elbow			Style 586 & 568 Short Tangent 90° Elbow			Style 591 & 571 45° Elbow		
Nominal Size mm Inches	Actual Outside Diameter mm Inches	C to PE mm Inches	U Takeout mm Inches	Approx. Weight Each kg Lbs.	C to PE mm Inches	U Takeout mm Inches	Approx. Weight Each kg Lbs.	C to PE mm Inches	U Takeout mm Inches	Approx. Weight Each kg Lbs.
15 ½	21.3 0.840	68 2.67	48 1.88	0.1 0.3	—	—	—	42 1.65	21 0.82	0.1 0.2
20 ¾	26.7 1.050	87 3.43	63 2.48	0.2 0.4	72 2.83	48 1.88	0.2 0.3	62 2.44	38 1.50	0.1 0.3
25 1	33.7 1.315	110 4.33	84 3.31	0.3 0.6	85 3.36	59 2.34	0.2 0.5	79 3.11	53 2.09	0.2 0.5
40 1½	48.3 1.900	171 6.73	135 5.32	0.6 1.4	117 4.60	81 3.19	0.5 1.0	127 5.00	91 3.59	0.6 1.3
50 2	60.3 2.375	208 8.19	162 6.38	1.0 2.3	145 5.71	99 3.90	0.7 1.5	153 6.02	107 4.22	0.9 2.0

### 90° Elbow

Pressfit	<b>304</b>	<b>Style 590</b>	Request Publication 18.02
	<b>316</b>	<b>Style 570</b>	Request Publication 18.01

### short tangent 90° Elbow

Pressfit	<b>304</b>	<b>Style 586</b>	Request Publication 18.02
	<b>316</b>	<b>Style 568</b>	Request Publication 18.01

### 45° Elbow


Pressfit	<b>304</b>	<b>Style 591</b>	Request Publication 18.02
	<b>316</b>	<b>Style 571</b>	Request Publication 18.01

# Pressfit System for Stainless Steel Pipe

AVAILABLE IN AUSTRALIA AND NEW ZEALAND ONLY

## Tee


Style 592 (P × P × P)  
Style 572 (P × P × P)



Style 592 & 572

## Tee with Threaded Branch

Style 588 (P × P × F)  
Style 578 (P × P × F)



Style 588 & 578

\* Length of effective thread.

Size		Dimensions				Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	C to PE mm Inches	U <sub>1</sub> mm Inches	C to EOB mm Inches	U <sub>2</sub> mm Inches	kg Lbs.
15	21.3	36	26	41	18	0.1
1/2	0.840	1.40	1.04	1.60	0.72	0.2
20	26.7	48	48	48	24	0.1
3/4	1.050	1.89	1.89	1.89	0.95	0.3
25	33.7	54	55	55	29	0.2
1	1.315	2.11	2.17	2.15	1.13	0.4
40	48.3	70	68	71	35	0.4
1 1/2	1.900	2.76	2.69	2.80	1.39	0.9
50	60.3	86	81	92	46	0.6
2	2.375	3.39	3.17	3.62	1.81	1.4

tee

Pressfit	<b>304</b>	<b>Style 592</b>	Request Publication 18.02
	<b>316</b>	<b>Style 572</b>	Request Publication 18.01

Size		Dimensions				Approx. Wgt. Each	
Nominal Size mm Inches		C to PE mm Inches	U <sub>1</sub> mm Inches	C to EOB mm Inches	U <sub>2</sub> mm Inches	kg Lbs.	
15	15	15	38	34	38	25	0.1
1/2	1/2	1/2	1.50	1.35	1.50	0.97	0.2
20	20	15	48	48	42	28	0.2
		1/2	1.89	1.89	1.64	1.11	0.3
		20	48	48	43	29	0.2
3/4	3/4	1/2	1.89	1.89	1.71	1.16	0.4
		20	48	48	43	29	0.2
		3/4	1.89	1.89	1.71	1.16	0.4
25	25	15	54	55	45	32	0.2
		1/2	2.11	2.17	1.78	1.25	0.4
		20	54	55	47	33	0.2
1	1	3/4	2.11	2.17	1.85	1.30	0.5
		25	54	55	51	34	0.3
		1	2.11	2.17	2.02	1.34	0.6
40	40	15	70	68	53	39	0.4
		1/2	2.76	2.69	2.07	1.54	0.8
		20	70	68	54	40	0.4
1 1/2	1 1/2	3/4	2.76	2.69	2.14	1.59	0.9
		25	70	68	59	40	0.4
		1	2.76	2.69	2.31	1.63	0.9
50	50	15	86	80	59	45	0.5
		1/2	3.39	3.16	2.31	1.78	1.2
		20	86	80	60	46	0.6
2	2	3/4	3.39	3.16	2.38	1.83	1.3
		25	86	80	65	48	0.6
		1	3.39	3.16	2.55	1.87	1.3

tee with threaded branch


Pressfit	<b>304</b>	<b>Style 588</b>	Request Publication 18.02
	<b>316</b>	<b>Style 578</b>	Request Publication 18.01

# Pressfit System for Stainless Steel Pipe

AVAILABLE IN AUSTRALIA  
AND NEW ZEALAND ONLY

## Tee with Reducing Branch


Style 593 (P × P × P)  
Style 573 (P × P × P)



Style 593 & 573

## Male Threaded Adapter

Style 596 (P × M)  
Style 576 (P × M)



Style 596 & 576

\* Length of effective thread.

Size			Dimensions				Approx. Weight Each
Nominal Size mm Inches			C to PE mm Inches	U <sub>1</sub> mm Inches	C to EOB mm Inches	U <sub>2</sub> mm Inches	kg Lbs.
20 ¾ × 20 ¾ × 15 ½	20 ¾ × 20 ¾ × 15 ½	15 ½	48	48	53	32	0.1
			1.90	1.91	2.10	1.27	0.3
25 1 × 25 1 × 20 ¾	25 1 × 25 1 × 20 ¾	15 ½	53	55	58	37	0.1
			2.10	2.15	2.30	1.47	0.3
			54	55	52	28	0.2
			2.11	2.17	2.03	1.09	0.4
40 1½ × 40 1½ × 20 ¾	40 1½ × 40 1½ × 20 ¾	15 ½	70	68	66	45	0.3
			2.76	2.69	2.60	1.77	0.6
			70	68	59	43	0.3
			2.76	2.69	2.32	1.68	0.7
50 2 × 50 2 × 25 1	50 2 × 50 2 × 25 1	15 ½	86	81	71	50	0.5
			3.39	3.17	2.80	1.97	1.2
			86	81	65	41	0.6
			3.39	3.17	2.56	1.62	1.3
50 2 × 50 2 × 25 1	50 2 × 50 2 × 25 1	25 1	86	81	68	42	0.5
			3.39	3.17	2.68	1.66	1.1
			86	81	77	41	0.6
			3.39	3.17	3.03	1.62	1.3

Size		Dimensions			Approx. Weight Each
Nominal Size mm Inches		E to E mm Inches	U Takeout mm Inches	IL Insert. Length mm Inches	kg Lbs.
15 ½ × 15 ½	15 ½	93	59	21	0.1
		3.68	2.32	0.83	0.2
20 ¾ × 20 ¾	15 ½	82	44	24	0.1
		3.22	1.75	0.95	0.3
		94	56	24	0.1
		3.72	2.22	0.95	0.3
25 1 × 25 1	20 ¾	82	41	24	0.2
		3.22	1.60	0.95	0.4
		102	59	26	0.2
40 1½ × 40 1½	20 ¾	85	45	26	0.1
		3.34	1.77	1.02	0.4
40 1½ × 40 1½	25 1	102	59	26	0.2
		4.02	2.32	1.02	0.4
		94	44	36	0.3
50 2 × 50 2	20 ¾	3.69	1.73	1.42	0.6
		112	58	36	0.3
		4.40	2.27	1.42	0.7
50 2 × 50 2	50 2	128	62	46	0.5
		5.03	2.46	1.81	1.0

male threaded adapter

tee with reducing branch †

Pressfit	<b>304</b>	<b>Style 593</b>	Request Publication 18.02
	<b>316</b>	<b>Style 573</b>	Request Publication 18.01

Pressfit	<b>304</b>	<b>Style 596</b>	Request Publication 18.02
	<b>316</b>	<b>Style 576</b>	Request Publication 18.01


† Available with female threaded outlet. Contact Victaulic.

# Pressfit System for Stainless Steel Pipe

AVAILABLE IN AUSTRALIA AND NEW ZEALAND ONLY

## Female Threaded Adapter

Style 599 (P × F)  
Style 579 (P × F)




Style 599 & 579

\* Length of effective thread.

## Weld Adapter

Style 561 (P × T)



Style 561

Size		Dimensions			Approx. Weight Each
Nominal Size mm Inches		E to E mm Inches	U Takeout mm Inches	IL Insert Length mm Inches	kg Lbs.
15	× 15	55	20	21	0.1
		2.15	0.79	0.83	0.2
20	× 15	56	18	24	0.1
		2.20	0.71	0.95	0.2
	× 20	56	20	24	0.1
		2.20	0.79	0.95	0.2
25	× 15	58	19	26	0.2
		2.30	0.75	1.02	0.4
	× 20	58	19	26	0.1
		2.30	0.73	1.02	0.3
× 25	61	19	26	0.2	
	2.40	0.75	1.02	0.4	
40	× 25	75	23	36	0.4
		2.96	0.92	1.42	0.8
	× 40	75	22	36	0.4
		2.96	0.87	1.42	0.8
50	× 40	95	32	46	0.5
		3.75	1.27	1.81	1.1
	× 50	95	32	46	0.5
		3.75	1.27	1.81	1.0

Size		Dimensions			Approx. Weight Each
Nominal Size mm Inches		E to E mm Inches	U Takeout mm Inches	IL Insert Length mm Inches	kg Lbs.
15	× 15	93	72	21	0.1
		3.68	2.85	0.83	0.2
20	× 20	94	70	24	0.1
		3.72	2.77	0.95	0.3
25	× 25	102	76	26	0.2
		4.02	3.00	1.02	0.4
40	× 40	112	76	36	0.3
		4.40	2.98	1.42	0.7
50	× 50	128	82	46	0.5
		5.03	3.22	1.81	1.0

weld adapter


Pressfit	<b>304</b>	Style 561	Request Publication 18.02
----------	------------	-----------	---------------------------

female threaded adapter

Pressfit	<b>304</b>	Style 599	Request Publication 18.02
	<b>316</b>	Style 579	Request Publication 18.01

## Threaded Union

Style 584 (P × P)  
Style 585 (P × P)



Style 584 & 585

Size		Dimensions		Approx. Weight Each
Nominal Size mm Inches	Actual Outside Diameter mm Inches	E to E mm Inches	U Takeout mm Inches	kg Lbs.
15	21.3	178	134	1.3
1/2	0.840	7.02	5.27	2.80
20	26.7	181	131	1.6
3/4	1.050	7.14	5.14	3.50
25	33.7	184	134	1.7
1	1.315	7.26	5.26	3.80
40	48.3	214	138	2.4
1 1/2	1.900	8.44	5.44	5.40
50	60.3	213	119	2.8
2	2.375	8.38	4.67	6.10

threaded union

Pressfit	<b>304</b>	Style 584	Request Publication 18.02
	<b>316</b>	Style 585	Request Publication 18.01


# Pressfit System for Stainless Steel Pipe

AVAILABLE IN AUSTRALIA  
AND NEW ZEALAND ONLY

## Grooved End Union

Style 547  
style 548

Request Publication 06.02 for Style 77 Flexible Joint  
Request Publication 06.04 for Style 07 Rigid Joint  
Request Publication 17.03/17.14 for Style 77S/475 Flexible Joints  
Request Publication 17.25 for Style 489 Rigid Joints




Pressfit	Size	Style	Request Publication
	<b>304</b>	Style 547	Request Publication 18.02
	<b>316</b>	Style 548	Request Publication 18.01

- Style 547/548 grooved end union can be formed with two Style 577 transition nipples and a variety of grooved end couplings with varied gaskets to meet service requirements
- Standard ductile iron couplings request Style 77 for flexible joints or Style 07 for rigid joints
- Where external corrosion is a concern request Style 77S/475 for flexible joints or Style 489 for rigid joints

## Flange Adapter

Style 595 (P × L)  
Style 575 (P × L)



Style 595 & 575


Size		Dimensions					Approx. Weight Each
Nominal Size mm Inches	Actual Out. Dia. mm Inches	U Takeout mm Inches	W mm Inches	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
15	21.3	59	35	60	89	82	1.1
1/2	0.840	2.34	1.38	2.38	3.50	3.22	2.3
20	26.7	58	43	70	99	82	0.8
3/4	1.050	2.27	1.69	2.75	3.88	3.22	1.7
25	33.7	58	51	79	108	84	1.0
1	1.315	2.27	2.00	3.12	4.25	3.29	2.2
40	48.3	53	73	99	127	88	1.6
1 1/2	1.900	2.07	2.88	3.88	5.00	3.48	3.6
50	60.3	46	92	121	152	92	2.4
2	2.375	1.80	3.62	4.75	6.00	3.60	5.4

flange adapter

Pressfit	Size	Style	Request Publication
	<b>304</b>	Style 595	Request Publication 18.02
	<b>316</b>	Style 575	Request Publication 18.01

## Van Stone Flange Adapter

Style 565 (P × L)  
Style 566 (P × L)



Style 565 & 566

Size		Dimensions	Approx. Weight Each
Nominal Size mm Inches	Actual Outside Diameter mm Inches	E to E mm Inches	kg Lbs.
15	21.3	79	1.4
1/2	0.840	3.12	3.00
20	26.7	81	1.5
3/4	1.050	3.17	3.30
25	33.7	83	1.6
1	1.315	3.28	3.60
40	48.3	93	2.3
1 1/2	1.900	3.64	5.00
50	60.3	120	2.7
2	2.375	4.73	5.90

van stone flange adapter †

Pressfit	Size	Style	Request Publication
	<b>304</b>	Style 565	Request Publication 18.02
	<b>316</b>	Style 566	Request Publication 18.01


† Available with carbon steel (standard) or 316 stainless steel (optional) back-up flange. Specify choice on order.

# Pressfit System for Stainless Steel Pipe

AVAILABLE IN AUSTRALIA AND NEW ZEALAND ONLY

## Transition Nipple

Style 587 (G × T)  
Style 577 (G × T)



Style 587 & 577


Size		Dimensions		Approx. Weight Each
Nominal Size mm Inches	Actual Outside Diameter mm Inches	E to E mm Inches	L <sub>1</sub> Minimum mm Inches	kg Lbs.
20	26.7	102	25	0.1
3/4	1.050	4.00	1.00	0.2
25	33.7	102	25	0.1
1	1.315	4.00	1.00	0.3
40	48.3	102	38	0.2
1 1/2	1.900	4.00	1.50	0.4
50	60.3	102	48	0.2
2	2.375	4.00	1.88	0.5

transition nipple

Pressfit	Size	Style	Request Publication
	<b>304</b>	Style 587	Request Publication 18.02
	<b>316</b>	Style 577	Request Publication 18.01

## Concentric Reducer

Style 594 (T × T)  
Style 574 (T × T)



Style 594 & 574


Size		Dimensions			Approx. Weight Each
Nominal Size mm Inches		E to E mm Inches	L <sub>1</sub> Minimum mm Inches	L <sub>2</sub> Minimum mm Inches	kg Lbs.
20	15	89	25	22	0.1
3/4	1/2	3.50	1.00	0.88	0.2
25	15	90	26	22	0.1
1	1/2	3.56	1.03	0.88	0.2
	20	90	26	25	0.1
	3/4	3.56	1.03	1.00	0.2
40	15	108	37	22	0.1
1 1/2	1/2	4.25	1.44	0.88	0.3
	20	108	37	25	0.2
	3/4	4.25	1.44	1.00	0.4
	25	108	37	26	0.2
	1	4.25	1.44	1.03	0.4
50	15	127	46	22	0.3
2	1/2	5.00	1.81	0.88	0.6
	20	127	46	25	0.3
	3/4	5.00	1.81	1.00	0.6
	25	127	46	26	0.3
	1	5.00	1.81	1.03	0.6
	40	127	46	37	0.3
	1 1/2	5.00	1.81	1.44	0.7

concentric reducer

Pressfit	Size	Style	Request Publication
	<b>304</b>	Style 594	Request Publication 18.02
	<b>316</b>	Style 574	Request Publication 18.01

## Reducer Insert

Style 582 (T × P)  
Style 583 (T × P)



Style 582 & 583

Size		Dimensions			Approx. Weight Each
Nominal Size mm Inches		E to E mm Inches	U Takeout mm Inches	IL Insertion Length mm Inches	kg Lbs.
25	20	75	25	24	0.1
1	3/4	2.95	0.98	0.95	0.2
50	40	110	28	36	0.3
2	1 1/2	4.33	1.11	1.42	0.6

reducer insert

Pressfit	Size	Style	Request Publication
	<b>304</b>	Style 582	Request Publication 18.02
	<b>316</b>	Style 583	Request Publication 18.01

# Pressfit System for Stainless Steel Pipe

AVAILABLE IN AUSTRALIA  
AND NEW ZEALAND ONLY

## Vic-Press 304™ Brass Body Ball Valve with Stainless Steel Pressfit Ends

Series 589 (P × P)


Request Publication 18.02



Size		Dimensions				Approx. Weight Each	Flow Coefficient@ (Fully Open)  K <sub>v</sub> Values C <sub>v</sub> Values
Nominal Size mm Inches	Actual Outside Diameter mm Inches	A End to End mm Inches	C mm Inches	F mm Inches	U Takeout mm Inches		
15 ½	21.3 0.840	216 8.49	34 1.33	78 3.07	174 6.84	0.4 0.9	8.7 10
20	26.7	226	46	96	178	0.6	21.6
¾	1.050	8.88	1.79	3.78	6.99	1.3	25
25	33.7	247	50	96	195	0.8	32.0
1	1.315	9.74	1.95	3.78	7.69	1.8	37
40	48.3	282	68	138	210	1.5	75.3
1½	1.900	11.09	2.68	5.43	8.26	3.4	87
50	60.3	328	73	138	236	2.0	95.2
2	2.375	12.90	2.89	5.43	9.29	4.4	110

@ C<sub>v</sub>/K<sub>v</sub> values for flow of water at +60°F/+16°C with valve fully open.

- Valve body constructed of forged brass
- Chrome plated brass ball and seals on TFE seats
- Standard port valve with Pressfit ends
- Pressure rated up to 300psi/2065kPa
- Sizes from ½–2"/15–50mm

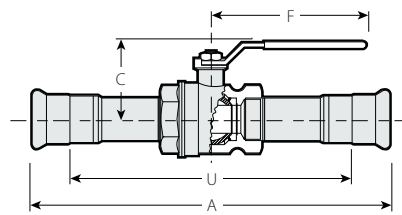

Typical for all sizes



# Pressfit System for Stainless Steel Pipe

AVAILABLE IN AUSTRALIA AND NEW ZEALAND ONLY

## Vic-Press 316™ Type 316 Stainless Steel Ball Valve

### Series 569

Request Publication 18.01






- Body and trim constructed of rugged Type 316 (CF8M) stainless steel with PTFE seats
- Blow-out proof stem self-adjusting floating ball
- Full-port design minimizes pressure drop for flow efficiency
- Three-piece swing-out design permits easy in-line maintenance
- Pressure rated up to 300 psi/2065 kPa with plain ends
- Pressure rated up to 400 psi/2750 kPa with grooved ends
- Sizes from ½–2"/15–50 mm
- Repair Kits and replacement parts are available for the Series 569 valve
- The Repair Kit consists of two seats, two gaskets, one stem seal, and one thrust washer, all made of PTFE. A replacement ball of CF8M stainless steel is also available
- For replacement stem information, contact Victaulic

Size		Dimensions				Approx. Weight Each
Nominal Size mm Inches	Actual Outside Diameter mm Inches	A End to End mm Inches	B mm Inches	C mm Inches	E mm Inches	kg Lbs.
15	21.3	200.0	59.9	22.4	130.0	0.7
½*	0.840	7.98	2.36	0.88	5.12	1.5
20	26.7	217.2	64.0	25.4	130.0	1.1
¾	1.050	8.57	2.52	1.00	5.12	2.4
25	33.7	225.8	71.1	25.4	165.1	1.6
1	1.315	8.89	2.80	1.00	6.50	3.6
40	48.3	284.5	86.1	38.1	190.0	3.1
1½	1.900	11.20	3.39	1.50	7.48	6.9
50	60.3	318.0	95.0	47.8	190.0	4.3
2	2.375	12.52	3.74	1.88	7.48	9.5

\* ½"/15 mm only available in plain end x plain end.

#### Important Note:

For dimensions and weights with gear operator contact Victaulic.

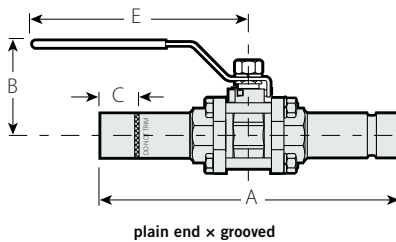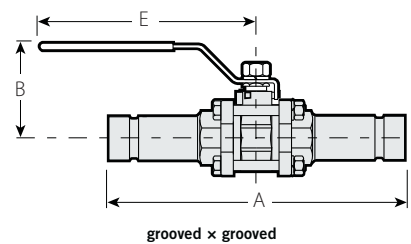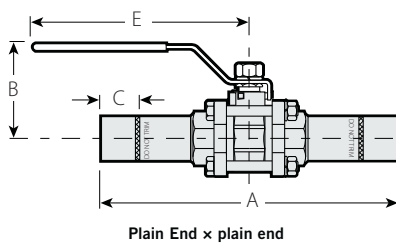


#### Repair Kits and replacement parts for series 569 ball valve

Size		Repair Kit	Replacement Ball
Nominal Size mm Inches	Actual Outside Diameter mm Inches	Part No.	Part No.
15	21.3	K-004-569-001	K-004-569-000
½	0.840		
20	26.7	K-006-569-001	K-006-569-000
¾	1.050		
25	33.7	K-010-569-001	K-010-569-000
1	1.315		
40	48.3	K-014-569-001	K-014-569-000
1½	1.900		
50	60.3	K-020-569-001	K-020-569-000
2	2.375		



# Plain End Piping System for HDPE Pipe

- Victaulic HDPE products have integral rows of gripping teeth that bite into the entire circumference of the HDPE pipe
- Eliminates the need for special heat fusion, solvent joining or special adapters
- Victaulic products are rated to the working pressure of the pipe
- Fast, easiest way to mechanically join HDPE pipe at wall thicknesses from SDR 32.5 to 7.3
- Sizes from 50–500 mm/2–20"

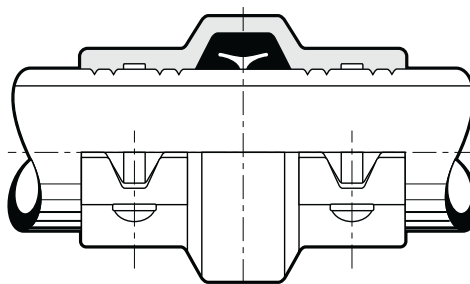

EXAGGERATED FOR CLARITY

### IMPORTANT NOTES:

Victaulic HDPE products are not intended for use on PVC pipe or other materials. Victaulic lubricant should **NOT** be used with HDPE pipe.

## Coupling STYLE 995, PG. 10-2



## Transition Coupling – HDPE to Steel

STYLE 997, PG. 10-3



## Vic-Flange Adapter ANSI Class 150

STYLE 994, PG. 10-4



### PRODUCTS

- 1-1 Couplings
- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe

## HDPE Pipe Dimensions

Size		Dimensions		
Nominal Size mm Inches	Actual Outside Diameter mm Inches	Outside Diameter		Maximum Out of Round Tol.* mm Inches
		Size mm Inches	Tol.* mm Inches	
50 2	60.3 2.375	60.3 2.375	0.406 ± 0.016	1.016 ± 0.040
80 3	88.9 3.500	88.9 3.500	0.406 ± 0.016	1.016 ± 0.040
100 4	114.3 4.500	114.3 4.500	0.508 ± 0.020	1.016 ± 0.040
125 5	141.3 5.563	141.3 5.563	0.635 ± 0.025	1.270 ± 0.050
150 6	168.3 6.625	168.3 6.625	0.762 ± 0.030	1.270 ± 0.050
200 8	219.1 8.625	219.1 8.625	0.990 ± 0.039	1.905 ± 0.075

Size		Dimensions		
Nominal Size mm Inches	Actual Outside Diameter mm Inches	Outside Diameter		Maximum Out of Round Tol.* mm Inches
		Size mm Inches	Tol.* mm Inches	
250 10	273.0 10.750	273.0 10.750	1.219 ± 0.048	1.905 ± 0.075
300 12	323.9 12.750	323.9 12.750	1.448 ± 0.057	1.905 ± 0.075
350 14 †	355.6 14.000	355.6 14.000	1.600 ± 0.063	1.905 ± 0.075
400 16	406.4 16.000	406.4 16.000	1.830 ± 0.072	§
450 18	457.0 18.000	457.0 18.000	2.060 ± 0.081	§
500 20	508.0 20.000	508.0 20.000	2.290 ± 0.090	§

\* At ambient temperatures.

§ See pipe manufacturer for maximum out of round tolerance.

† Contact Victaulic for special bolt/nut requirements.

### 10-1 Plain End Piping System for HDPE Pipe

- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software

# Plain End Piping System for HDPE Pipe

## Coupling

### STYLE 995


For Complete Information  
Request Publication **19.02**



- Sharp gripping teeth on both housing sides grip into outside diameter of HDPE pipe
- Design permits direct joining without fusing equipment
- Sizes from 50–500mm/2–20"

Size		Dimensions			Approx. Weight Each
Nominal Size mm Inches	Actual Outside Diameter mm Inches	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
50 2	60.3 2.375	94 3.69	151 5.94	92 3.63	1.6 3.5
80 3	88.9 3.500	118 4.63	178 7.00	116 4.56	3.5 7.7
90†	90.9	116	178	116	3.4
110†	111.0	145	202	146	5.3
100 4	114.3 4.500	149 5.88	207 8.13	148 5.81	5.3 11.6
140†	141.3	176	250	149	6.8
125 5	141.3 5.563	176 6.94	251 9.88	149 5.88	6.8 15.0
160†	161.5	195	268	149	7.3
150 6	168.3 6.625	203 8.00	276 10.88	149 5.88	7.4 16.4
200†	201.8	259	336	152	9.7
200 8	219.1 8.625	259 10.19	377 13.25	152 6.00	11.3 24.9
225†	227.1	265	345	152	10.9
250†	252.3	314	402	165	17.0
250 10	273.0 10.750	314 12.38	403 15.88	165 6.50	17.0 37.4
280†	282.6	321	408	165	17.6
315†	317.9	356	448	178	20.7
300 12	323.9 12.750	365 14.38	457 18.00	178 7.00	22.2 49.0
350 14	355.6 14.000	413 16.25	505 19.88	218 8.58	36.7 81.0
355†	358.2	414	525	218	36.7
400†	403.6	465	605	229	45.5
400 16	406.4 16.000	465 18.30	607 23.88	229 9.00	45.5 100.0
450†	453.8	516	650	241	57.7
450 18	457.0 18.000	516 20.30	651 25.63	241 9.50	57.7 127.0
500†	504.0	566	699	254	64.5
500 20	508.0 20.000	566 22.30	697 27.44	254 10.00	64.5 142.0

† Available in metric sizes only.

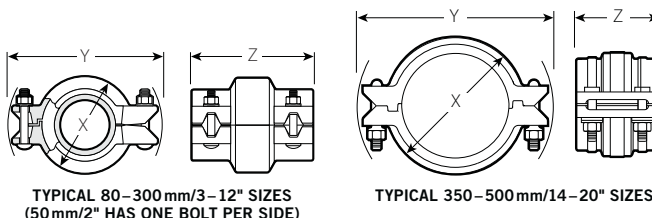

# Plain End Piping System for HDPE Pipe

## Transition Coupling – HDPE to Steel

### STYLE 997


For Complete Information  
Request Publication **19.03**




Size		Dimensions			Approx. Weight Each
Nominal Size mm Inches	Actual Outside Diameter mm Inches	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
50 2	60.3 2.375	84 3.31	133 5.22	71 2.78	1.4 3.0
80 3	88.9 3.500	111 4.38	178 6.99	81 3.20	3.0 6.6
100 4	114.3 4.500	144 5.68	210 8.25	99 3.90	4.0 8.7
125 5	141.3 5.563	172 6.75	248 9.77	101 3.97	5.2 11.5
150 6	168.3 6.625	199 7.84	286 11.25	102 4.00	6.7 14.8
200 8	219.1 8.625	259 10.18	355 13.96	106 4.16	9.8 21.7
250 10	273.0 10.750	321 12.63	427 16.81	116 4.56	15.6 34.3
300 12	323.9 12.750	370 14.58	477 18.76	123 4.85	17.0 37.5



- Fastest and easiest way to join plain end HDPE pipe to grooved steel pipe, valves, and fittings
- Designed for use with HDPE with pipe wall thickness from SDR 32.5 to 7.3
- Grooved side has conventional key section to engage standard roll or cut grooved steel pipe of same size as mating HDPE pipe
- Sizes from 50–300mm/2–12"

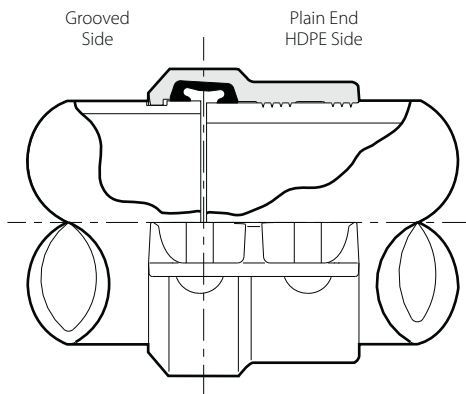

EXAGGERATED FOR CLARITY

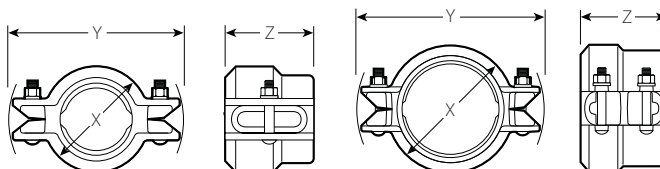

TYPICAL 50 mm/2" SIZE

TYPICAL 80–300 mm/3–12" SIZES

# Plain End Piping System for HDPE Pipe

## Vic-Flange Adapter ANSI Class 150

### STYLE 994


For Complete Information  
Request Publication **19.04**



- Permits direct connection of ANSI Class 125 and 150 flanged components into HDPE systems
- Sizes from 100–200mm/4–8"

Size		Sealing Surface*		Dimensions		Approx. Weight Each
Nominal Size mm Inches	Actual Outside Diameter mm Inches	A Minimum mm Inches	B Maximum mm Inches	X mm Inches	Z mm Inches	kg Lbs.
100 4	114.3 4.500	114 4.50	147 5.78	229 9.00	86 3.38	5.7 12.5
150 6	168.3 6.625	168 6.63	202 7.97	279 11.00	102 4.00	7.8 17.3
200 8	219.1 8.625	220 8.63	254 10.00	343 13.50	114 4.50	14.0 30.8

\* Minimum/maximum sealing surface on mating flange must be available for proper gasket seating. Entire area must be flat. Heavy serrated (phonograph record) finishes are not acceptable. When used with rubber seated wafer butterfly valves, a flat metal adapter plate is needed.



#### TYPICAL FOR ALL SIZES

Orange area of mating face must be free from gouges, undulations or deformities of any type for effective sealing.

# Grooved Copper

- Cold formed system eliminates the need for soldering or brazing
- Full line of couplings, fittings and valves for systems rated to 2065 kPa/300 psi
- Line of roll grooving tools available for on-site grooving
- Copper connection system joins 50–200 mm/2–8" copper tubing



## Couplings

### Rigid Coupling

STYLE 606-CTS, PG. 11-3  
 STYLE 606-AS, PG. 11-4  
 STYLE 606-EN1057, PG. 11-5



### Vic-Flange Adapter

STYLE 641-CTS, PG. 11-6  
 STYLE 641-EN1057, PG. 11-6



## Valves

### Butterfly Valve

SERIES 608-CTS, PG. 11-12  
 SERIES 608-AS, PG. 11-13  
 SERIES 608-EN1057, PG. 11-14



## PRODUCTS

- 1-1 Couplings
- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper**
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software

### Mechanical-T Bolted Branch Outlet

STYLE 622, PG. 11-7



### Mechanical-T Bolted Branch Crosses

STYLE 622, PG. 11-7



# Grooved Copper



## Style 47 Clearflow Dielectric Waterway Fittings

Style 47 Clearflow dielectric waterway fittings provide a simple and effective transition from copper tubing to steel pipe. Available in groove by groove, groove by thread, and thread by thread end configurations, Style 47 dielectric waterways essentially eliminate galvanic cell and stray current problems that lead to corrosion. The inside of the fitting is insulated with a thermoplastic lining that inhibits the internal formation of galvanic cell corrosion that is common when dissimilar metals are in contact.


For details see page 4-13 or request publication 09.07.

## Fittings




90° Elbow

**NO. 610-CTS, PG. 11-8**  
**NO. 610-EN1057, PG. 11-9**




Tee

**NO. 620-CTS, PG. 11-8**  
**NO. 620-EN1057, PG. 11-9**



Reducing Tee  
Grv. x Grv. x Grv.

**NO. 625-CTS, PG. 11-10**  
**NO. 625-EN1057, PG. 11-10**



Reducing Tee  
Grv. x Grv. x Cup

**NO. 626-CTS, PG. 11-10**  
**NO. 626-EN1057, PG. 11-10**




45° Elbow

**NO. 611-CTS, PG. 11-8**  
**NO. 611-EN1057, PG. 11-9**



Concentric Reducer  
Grv. x Grv.

**NO. 650-CTS, PG. 11-11**  
**NO. 650-EN1057, PG. 11-11**



Concentric Reducer  
Grv. x Cup

**NO. 652-CTS, PG. 11-11**  
**NO. 652-EN1057, PG. 11-11**



Cap

**NO. 660-CTS, PG. 11-8**  
**NO. 660-EN1057, PG. 11-9**  
**NO. 660B-EN1057, PG. 11-9**

# Grooved Copper – Couplings

## Performance

The Victaulic copper connection system has been thoroughly tested on Types K, L, M, and DWV copper tubing. Victaulic products are routinely tested to failure in unrestrained hydrostatic and flexure tests. Using our normal minimum 3-to-1 safety factor, these tests provided regular verification of the product working pressures. The ratings in this table apply to all copper connection products for the indicated types of tubing.

Size	Type "K" ASTM B-88			Type "L" ASTM B-88			Type "M" ASTM B-88			DWV ASTM B-306		
	Actual mm Nominal Inches	Wall Thick. mm Inches	Max. Joint Working Press. kPa psi	Max. Permis. End Load N Lbs.	Wall Thick. mm Inches	Max. Joint Working Press. kPa psi	Max. Permis. End Load N Lbs.	Wall Thick. mm Inches	Max. Joint Working Press. kPa psi	Max. Permis. End Load N Lbs.	Wall Thick. mm Inches	Max. Joint Working Press. kPa psi
54.0 2	2.1 0.083	2065 300	4740 1,065	1.8 0.070	2065 300	4740 1,065	1.5 0.058	1725 250	3960 890	1.1 0.042	690 100	1576 354
66.7 2 1/2	2.4 0.095	2065 300	7230 1,625	2.0 0.080	2065 300	7230 1,625	1.7 0.065	1725 250	6010 1,350	—	—	—
79.4 3	2.8 0.109	2065 300	10235 2,300	2.3 0.090	2065 300	10235 2,300	1.8 0.072	1725 250	6300 1,415	1.1 0.045	690 100	3405 765
104.8 4	3.4 0.134	2065 300	17825 4,005	2.8 0.110	2065 300	17825 4,005	2.4 0.095	1725 250	14865 3,340	1.5 0.058	690 100	5940 1,335
130.2 5	4.1 0.160	2065 300	27550 6,190	3.2 0.125	2065 300	27550 6,190	2.8 0.109	1375 20	18360 4,125	1.8 0.072	690 100	9170 2,060
155.6 6	4.9 0.192	2065 300	39340 8,840	3.6 0.140	2065 300	39340 8,840	3.1 0.122	1375 200	26210 5,890	2.1 0.083	690 100	13105 2,945
206.4 8	6.9 0.271	2065 300	69200 15,550	5.1 0.200	2065 300	69200 15,550	4.3 0.170	1375 200	46,100 10,370	2.8 0.109	690 100	23000 5,180

Working Pressure and End Load are total, from all internal and external loads, based on the indicated type of copper tubing, standard roll grooved in accordance with Victaulic specifications.

### IMPORTANT NOTE:

For one time field test only, the Maximum Joint Working Pressure may be increased to 1½ times the figures shown.

WARNING: Depressurize and drain the piping system before attempting to install, remove, or adjust any Victaulic piping products.

## Rigid Coupling

### STYLE 606-CTS


For Complete Information  
Request Publication 22.02



- Eliminates brazing or soldering
- Unique patented angled-pad creates a rigid joint
- Pressure rated up to 2065 kPa/300 psi
- Sizes from 54–206.4 mm/2–8" to fit Type K, L, M and DWV copper tubing (CTS)

Size	Allow Pipe End Sep. #	Dimensions			Approx. Weight Each
		X mm Inches	Y mm Inches	Z mm Inches	
54.0 2	1.5 0.06	81 3.17	123 4.86	45 1.75	0.7 1.5
66.7 2 1/2	1.5 0.06	93 3.67	136 5.34	45 1.75	0.9 2.0
79.4 3	1.5 0.06	106 4.17	165 6.50	45 1.75	1.0 2.2
104.8 4	1.5 0.06	131 5.17	186 7.34	45 1.75	1.5 3.2
130.2 5	1.5 0.06	158 6.23	234 9.21	45 1.75	2.2 4.9
155.6 6	1.5 0.06	183 7.20	257 10.13	45 1.75	2.6 5.7
206.4 8	1.5 0.06	239 9.40	315 12.42	48 1.88	3.3 7.2

# For field installation only. Style 606-CTS is essentially rigid and does not permit expansion/contraction.



TYPICAL FOR ALL SIZES



# Grooved Copper – Couplings

## Performance

The Victaulic copper connection system has been thoroughly tested on Types A, B, and D copper tubing to establish the pressure ratings shown in the adjacent table.

Size		Type "A" to AS-1432		Type "B" to AS-1432		Type "D"	
Nominal Size mm	Actual Size mm Inches	Max. Joint Working Press. kPa psi	Max. Permis. End Load N Lbs.	Max. Joint Working Press. kPa psi	Max. Permis. End Load N Lbs.	Max. Joint Working Press. kPa psi	Max. Permis. End Load N Lbs.
DN50	50.8 2.00	2450 355	4940 1110	1790 260	3650 820	650 94	1290 290
DN65	63.5 2.50	1960 284	6230 1400	1450 210	4580 1030	650 94	2050 460
DN80	76.1 3.00	2030 294	9250 2080	1620 235	7390 1660	650 94	2940 660
DN100	101.6 4.00	1520 220	12280 2760	1210 176	9790 2200	650 94	5250 1180
DN125	127.0 5.00	1210 176	15300 3440	970 141	12230 2750	650 94	8190 1840
DN150	152.4 6.00	1310 190	24165 5370	1000 145	18450 4100	650 94	11790 2650

Working Pressure and End Load are total, from all internal and external loads, based on the indicated type of copper tubing, standard roll grooved in accordance with Victaulic specifications.

### IMPORTANT NOTE:

For one time field test only, the Maximum Joint Working Pressure may be increased to 1½ times the figures shown.

WARNING: Depressurize and drain the piping system before attempting to install, remove, or adjust any Victaulic piping products.

## Rigid Coupling

### STYLE 606-AS

For Complete Information Request Publication **22.10**




Size		Allow Pipe End Sep. #	Dimensions			Approx. Weight Each
Nominal Size mm	Actual Size mm Inches	mm Inches	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
DN50	50.8 2.00	0.76 0.03	77.4 3.05	122.3 4.81	45.7 1.80	0.63 1.4
DN65	63.5 2.50	0.76 0.03	89.8 3.54	134.8 5.31	45.7 1.80	0.86 1.9
DN80	76.1 3.00	0.76 0.03	102.9 4.05	164.6 6.48	45.7 1.80	0.91 2.0
DN100	101.6 4.00	4.39 0.17	131.8 5.19	188.9 7.44	49.2 1.94	1.41 3.1
DN125	127.0 5.00	4.60 0.18	158.8 6.25	233.8 9.20	49.4 1.95	2.16 4.8
DN150	152.4 6.00	4.60 0.18	184.1 7.25	256.9 10.11	49.4 1.95	2.52 5.6



- Eliminates brazing or soldering
- Unique patented angled-pad creates a rigid joint
- Pressure rated up to 2065 kPa/300 psi
- Sizes from DN50–DN150 mm to fit Type A, B and D copper tubing (AS)

# For field installation only. Style 606-AS is essentially rigid and does not permit expansion/contraction.



TYPICAL FOR ALL SIZES

# Grooved Copper – Couplings

## Performance

The Victaulic copper connection system has been thoroughly tested on copper tubing. Victaulic products are routinely tested to failure in unrestrained hydrostatic and flexure tests. Using our normal minimum 3-to-1 safety factor, these tests provided regular verification of the product working pressures. The ratings in this table apply with Victaulic Style 606-EN1057 coupling, Style 641-EN1057 Vic-Flange adapter, and roll grooved copper fittings on the indicated types of tubing.

### Important Note:

Working Pressure and End Load are total, from all internal and external loads, based on the indicated type of copper tubing, standard roll grooved in accordance with Victaulic specifications.

For one time field test only, the Maximum Joint Working Pressure may be increased to 1½ times the figures shown.

WARNING: Depressurize and drain the piping system before attempting to install, remove, or adjust any Victaulic piping products.

Size		Wall Thickness		Max. Work Pressure*		Max. End Load	
mm	Inches	mm	Inches	kPa	psi	N	Lbs.
54.0	2.125	1.2	0.05	1600	232	3664	824
54.0	2.125	2.0	0.08	2100	305	4809	1,081
64.0	2.250	2.0	0.08	1600	232	5147	1,157
66.7	2.625	1.2	0.05	1500	220	5241	1,178
66.7	2.625	2.0	0.08	2100	305	7338	1,650
76.1	3.000	1.5	0.06	1600	232	7277	1,636
76.1	3.000	2.0	0.08	1900	275	8642	1,943
88.9	3.500	2.0	0.08	1600	232	9931	2,232
108.0	4.250	1.5	0.06	1600	232	14657	3,295
108.0	4.250	2.5	0.10	1800	260	16490	3,707
133.0	5.236	1.5	0.06	1500	220	20839	4,685
133.0	5.236	3.0	0.12	1600	232	22229	4,997
159.0	6.260	2.0*	0.08	1500	220	29783	6,695
159.0	6.260	3.0	0.12	1500	220	29783	5,803

\* When combined with older No. 610 and No. 611 elbows size 159.0 mm/6.260", made of wrought material, the maximum joint working pressure rating for Style 606 couplings is reduced to 1000 kPa/145 psi. Cast elbows size 159.0 mm/6.260" are rated to 1500 kPa/220 psi. Note that these older products may still be in stock with Victaulic and its distributors.

## Rigid Coupling

### STYLE 606-EN1057


For Complete Information Request Publication 22.11



- Eliminates brazing or soldering
- Unique patented angled-pad creates a rigid joint
- Pressure rated up to 2065 kPa/300 psi
- Sizes from 54.0–159.0 mm/ 2–6" to fit copper tubing (EN1057)

Size	Allow Pipe End Sep. #	Dimensions			Approx. Weight Each
		X mm Inches	Y mm Inches	Z mm Inches	
54.0	0.76	81	118	46	0.7
2.125	0.03	3.17	4.63	1.80	1.54
64.0	0.76	89	129	46	0.9
2.250	0.03	3.50	5.08	1.80	1.98
66.7	0.76	93	130	46	0.9
2.625	0.03	3.67	5.13	1.80	1.98
76.1	0.76	103	152	46	1.1
3.000	0.03	4.05	5.97	1.80	2.42
88.9	0.76	116	162	46	1.4
3.500	0.03	4.57	6.38	1.80	3.1
108.0	4.30	138	181	49	1.7
4.250	0.17	5.44	7.14	1.94	3.75
133.0	4.60	165	229	50	2.5
5.236	0.18	6.50	9.01	1.97	5.51
159.0	4.60	191	255	49	2.9
6.260	0.18	7.53	10.02	1.94	6.39

# For field installation only. Style 606-EN1057 is essentially rigid and does not permit expansion/contraction.



TYPICAL FOR ALL SIZES

# Grooved Copper – Couplings

## Vic-Flange Adapter


### STYLE 641-CTS

For Complete Information  
Request Publication 22.03



- Direct connection from flanged components to grooved copper tubing
- Integral tabs ease handling
- Sizes from 54.0–155.6 mm/2–6" to fit K, L, M, or DWV copper tubing (CTS)

Size	Sealing Surface		Dimensions				Approx. Weight Each
	Actual mm Nominal Inches	A Maximum mm Inches	B Minimum mm Inches	W mm Inches	X mm Inches	Y mm Inches	Z mm Inches
54.0 2	54 2.13	81 3.20	175 6.88	152 6.00	121 4.75	20 0.78	1.7 3.8
66.7 2½	67 2.63	99 3.91	200 7.88	178 7.00	140 5.50	22 0.88	2.1 4.7
79.4 3	80 3.13	115 4.53	214 8.44	191 7.50	152 6.00	24 0.94	2.5 5.4
104.8 4	105 4.13	140 5.53	253 9.94	229 9.00	191 7.50	24 0.94	3.5 7.7
130.2 5	130 5.13	170 6.71	279 11.00	254 10.00	216 8.50	25 1.00	4.2 9.3
155.6 6	156 6.13	198 7.78	305 12.00	279 11.00	241 9.50	25 1.00	4.7 10.3



TYPICAL FOR ALL SIZES

Orange area of mating face must be free from gouges, undulations or deformities of any type for effective sealing.

#### IMPORTANT NOTES:

Style 641-CTS Vic-Flange adapters for copper tubing provide rigid joints when used on copper tubing that is roll grooved to Victaulic dimensions and consequently allow no linear or angular movement at the joint. For restrictions on where and how Vic-Flange adapters and flange washers can be used, refer to Publication 22.03.

## Vic-Flange Adapter


### STYLE 641-EN1057

For Complete Information  
Request Publication 22.11



- Direct connection from flanged components to grooved copper tubing
- Integral tabs ease handling
- Sizes from 54.0–159.0 mm/2–6" to fit copper tubing (EN1057)

Size	Sealing Surface		Dimensions				Approx. Weight Each
	Actual mm Nominal Inches	A Maximum mm Inches	B Minimum mm Inches	W mm Inches	X mm Inches	Y mm Inches	Z mm Inches
54.0 2.125	54 2.13	78 3.07	175 6.89	152 6.00	125 4.92	20 0.78	1.7 3.75
64.0 2.250	64 2.25	89 3.50	214 8.43	185 7.28	145 5.71	22 0.88	2.1 4.63
66.7 2.625	67 2.64	92 3.62	200 7.87	178 7.00	145 5.71	22 0.88	2.1 4.63
76.1 3.000	76 2.99	101 3.98	208 8.19	185 7.28	145 5.71	20 0.78	2.5 5.51
76.1 3.000	76 2.99	101 3.98	215 8.48	200 7.87	160 6.30	22 0.88	2.5 5.51
88.9 3.500	89 3.50	114 4.49	220 8.66	200 7.87	160 6.30	22 0.88	2.8 6.20
108.0 4.250	108 4.25	133 5.24	243 9.57	220 8.66	180 7.09	24 0.94	3.1 6.84
133.0 5.236	133 5.24	160 6.30	274 10.78	249 9.84	210 8.27	25 1.00	3.9 8.60
159.0 6.260	159 6.26	186 7.32	307 12.09	285 11.22	240 9.45	26 1.02	4.5 9.92



TYPICAL FOR ALL SIZES

Orange area of mating face must be free from gouges, undulations or deformities of any type for effective sealing.

#### IMPORTANT NOTES:

Style 641-EN1057 Vic-Flange adapters for copper tubing provide rigid joints when used on copper tubing that is roll grooved to Victaulic dimensions and consequently allow no linear or angular movement at the joint.

For restrictions on where and how Vic-Flange adapters and flange washers can be used, refer to Publication 22.11.

# Grooved Copper – Couplings

## Mechanical-T Bolted Branch Outlet

### STYLE 622

For Complete Information  
Request Publication **22.12**




- Direct branch connection at any location on the tubing
- Hole finder locating collar secures the Style 622 to the pipe
- Pressure rates up to 2065 kPa/300 psi
- Sizes from 65 × 20 mm/2½ – ¾" to 100 × 40 mm/4 – 1½"

Size		Dimensions						Approx. Weight Each	
Run × Branch Nominal Size mm Inches	Hole Diameter -0.00 +0.13	T ** mm Inches	V ‡ Thd. mm Inches	W mm Inches	Y mm Inches	Z mm Inches	kg Lbs.		
65 2½ ×	20 ¾	38 1.50	52 2.05	66 2.61	44 1.73	150 5.90	70 2.75	1.4 3.1	
	25 1	38 1.50	49 1.93	66 2.61	44 1.73	150 5.90	70 2.75	1.5 3.2	
	40 1½	51 2.00	55 2.15	73 2.87	44 1.73	154 6.06	86 3.38	1.9 4.1	
	80 3 ×	20 ¾	38 1.50	58 2.30	73 2.86	53 2.09	160 6.30	70 2.75	1.5 3.6
80 3 ×	25 1	38 1.50	56 2.19	73 2.87	53 2.09	160 6.30	70 2.75	1.6 3.6	
	40 1½	51 2.00	66 2.59	84 3.31	53 2.09	160 6.30	86 3.38	2.0 4.5	
	100 4 ×	20 ¾	38 1.50	71 2.81	86 3.37	64 2.50	184 7.25	70 2.75	1.7 3.3
		25 1	38 1.50	68 2.69	86 3.37	64 2.50	184 7.25	70 2.75	1.8 4.0
40 1½		51 2.00	79 3.09	97 3.81	64 2.50	184 7.25	86 3.38	2.3 5.0	

\*\* Center of run to engaged pipe end, female threaded outlet only (dimensions approximate).

‡ Center of run to end of fitting.



## Mechanical-T Bolted Branch Crosses

### STYLE 622

For Complete Information  
Request Publication **22.12**

- Combination of upper housings from Style 622 Mechanical-T outlet
- Available in sizes from 65–100 mm/2½–4"
- Working pressure equivalent to Style 622 Mechanical-T outlet



# Grooved Copper – Fittings

## Elbows, Tee and Caps – CTS


**NO. 610-CTS** 90° Elbow

**NO. 611-CTS** 45° Elbow


**NO. 620-CTS** Tee

**NO. 660-CTS** Cap


For Complete  
Information  
Request  
Publication **22.04**



**NO. 610-CTS**



**NO. 611-CTS**



**NO. 620-CTS**



**NO. 660-CTS**

Size	No. 610-CTS 90° Elbow		No. 611-CTS 45° Elbow		No. 620-CTS Tee		No. 660-CTS Cap	
	Actual mm Nominal Inches	C to E mm Inches	Approx. Weight Each kg Lbs.	C to E mm Inches	Approx. Weight Each kg Lbs.	C to E mm Inches	Approx. Weight Each kg Lbs.	T mm Inches
54.0 2	74 2.91	0.4 0.9	56 2.19	0.4 0.8	62 2.69	0.5 1.1 c	24 0.96	0.5 1.2 c
66.7 2½	84 3.31	0.6 1.3	59 2.31	0.5 1.1	81 3.20	0.8 1.8 c	24 0.96	0.6 1.4 c
79.4 3	97 3.81	1.9 4.1 c	66 2.59	0.7 1.6 c	89 3.52	1.5 3.2 c	24 0.96	0.6 1.4 c
104.8 4	121 4.75	3.0 6.7 c	81 3.19	1.5 3.4 c	108 4.25	2.8 6.1 c	24 0.96	1.1 2.4 c
130.2 5	151 5.94	6.8 15.0 c	83 3.25	4.5 10.0 c	151 5.94	8.4 18.5 c	24 0.96	1.6 3.5 c
155.6 6	176 6.94	9.1 20.0 c	92 3.63	5.9 13.0 c	176 6.94	11.6 25.5 c	24 0.96	1.9 4.2 c
206.4 8	197 7.75	11.8 26.0 c	108 4.25	7.1 15.6 c	197 7.75	20.4 45.0 c	—	—

c = Bronze casting; all others, drawn copper.

### IMPORTANT NOTE:

Designed for installation into copper systems using either a Style 606-CTS coupling or Style 641-CTS Vic-Flange adapter.


- Full flow standard radius copper fittings are supplied as either roll grooved wrought copper or bronze castings
- Pressures rated up to 2065 kPa/300 psi

# Grooved Copper – Fittings


## Elbows, Tee and Caps – EN1057 Standard

- NO. 610-EN1057** 90° Elbow
- NO. 611-EN1057** 45° Elbow
- NO. 620-EN1057** Tee
- NO. 660-EN1057** Cap


For Complete Information Request Publication **22.11**



NO. 610-EN1057



NO. 611-EN1057



NO. 620-EN1057



NO. 660-EN1057

Size	No. 610-EN1057 90° Elbow		No. 611-EN1057 45° Elbow		No. 620-EN1057 Tee		No. 660-EN1057 Cap	
	Actual Size mm Inches	C to E mm Inches	Approx. Weight Each kg Lbs.	C to E mm Inches	Approx. Weight Each kg Lbs.	C to E mm Inches	Approx. Weight Each kg Lbs.	T mm Inches
54.0 2.125	74.0 2.91	0.4 0.9	56.0 2.19	0.4 0.9	68.0 2.69	0.5 c 1.1	24 0.96	0.5 c 1.0
64.0 2.250	84.0 3.31	0.6 1.3	59.0 2.31	0.5 1.1	81.0 3.20	0.8 c 1.8	+	+
66.7 2.625	84.0 3.31	0.6 c 1.3	59.0 2.31	0.5 1.1	81.0 3.20	0.8 c 1.8	24 0.96	0.6 c 1.3
76.1 3.000	96.8 3.81	1.0 c 2.1	66.0 2.59	0.7 1.6	89.3 3.52	1.5 c 3.3	+	+
88.9 3.500	109.0 4.29	1.7 c 3.7	+	+	90.0 3.54	1.5 3.3	24 0.96	0.6 c 1.3
108.0 4.250	121.0 4.75	1.8 c 4.0	81.0 3.19	1.5 c 3.4	108.0 4.25	2.8 c 6.1	24.4 0.96	1.1 2.4
133.0 5.236	151.0 5.94	6.4 c 14.0	+	+	151.0 5.94	10.0 c 22.1	+	+
159.0 6.260	176.0 6.94	9.1 c 20.1	92.0 3.63	5.9 c 13.0	176.0 6.94	13.2 c 29.1	+	+

c = Bronze casting; all others, drawn copper.

+ Contact Victaulic for details.

### IMPORTANT NOTE:

Designed for installation into copper systems using either a Style 606-EN1057 coupling or Style 641-EN1057 Vic-Flange adapter.

## Bronze (RG12) Cap with Concentric Threaded Hole

**NO. 660B-EN1057** Cap

For Complete Information Request Publication **22.11**



NO. 660B-EN1057

Size		No. 660B-EN1057 Cap	
Actual Size mm Inches		Approx. Weight Each kg Lbs.	
54.0 2.125	× 25.4 1	0.3 0.7	
64.0 2.250	× 25.4 1	0.3 0.7	
76.1 3.000	× 25.4 1	0.3 0.7	
88.9 3.500	× 25.4 1	0.6 1.3	
88.9 3.500	× 50.8 2	+	


+ Contact Victaulic for details.

# Grooved Copper – Fittings

## Reducing Tee – CTS

**NO. 625-CTS** Grv. x Grv. x Grv.  
**NO. 626-CTS** Grv. x Grv. x Cup


For Complete Information Request Publication **22.04**

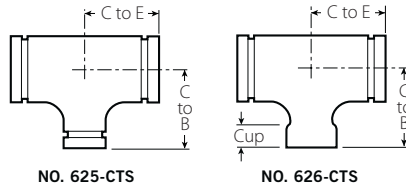

## Reducing Tee – EN1057 Standard

**NO. 625-EN1057** Grv. x Grv. x Grv.  
**NO. 626-EN1057** Grv. x Grv. x Cup

For Complete Information Request Publication **22.11**

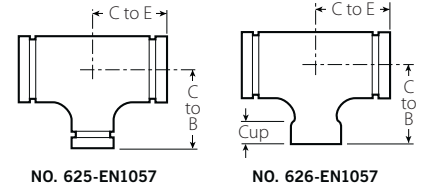

Size	No. 625-CTS Grv. x Grv. x Grv.			No. 626-CTS Grv. x Grv. x Cup			
	Actual mm Nominal Inches	C to E mm Inches	C to B mm Inches	Approx. Wgt. kg Lbs.	C to E mm Inches	C to B mm Inches	Cup mm Inches
54.0 2 × 54.0 2 × 22.5 ¾	—	—	—	56 2.20	50 1.98	19 0.75	0.3 0.75
	28.6 1	—	—	59 2.33	56 2.20	23 0.91	0.4 0.81
	34.9 1¼	—	—	63 2.48	60 2.35	25 0.97	0.4 0.85
	41.3 1½	—	—	65 2.55	58 2.28	28 1.09	0.4 0.87
66.7 2½ × 66.7 2½ × 28.6 1	—	—	—	61 2.40	61 2.40	23 0.91	0.5 1.17
	34.9 1¼	—	—	64 2.52	65 2.57	25 0.97	0.5 1.23
	41.3 1½	—	—	69 2.70	68 2.68	28 1.09	0.6 1.32
	54.0 2	83 3.28	86 3.38	0.7 1.58	—	—	—
79.4 3 × 79.4 3 × 28.6 1	—	—	—	65 2.54	71 2.79	23 0.91	0.7 1.45
	34.9 1¼	—	—	67 2.63	73 2.89	25 0.97	0.8 1.74
	41.3 1½	—	—	72 2.85	76 3.00	28 1.09	0.8 1.74
	54.0 2	76 3.00	86 3.38	1.0 2.14 c	—	—	—
104.8 4 × 104.8 4 × 28.6 1	—	—	—	79 3.10	82 3.22	23 0.91	1.3 2.86
	34.9 1¼	—	—	83 3.25	88 3.47	25 0.97	1.4 3.03
	41.3 1½	—	—	85 3.35	93 3.65	28 1.09	1.4 3.16
	54.0 2	93 3.66	105 4.13	2.4 5.25 c	—	—	—
130.2 5 × 130.2 5 × 28.6 1	—	—	—	95 3.75	118 4.63	2.5 5.41 c	—
	104.8 4	108 4.25	116 4.56	4.0 8.75 c	—	—	—
	66.7 2½	92 3.63	130 5.13	3.0 6.66 c	—	—	—
	79.4 3	94 3.69	132 5.19	3.7 8.12 c	—	—	—
155.6 6 × 155.6 6 × 28.6 1	—	—	—	106 4.19	130 5.13	4.4 9.75 c	—
	104.8 4	119 4.69	132 5.19	5.1 11.25 c	—	—	—
	66.7 2½	92 3.63	130 5.13	3.0 6.66 c	—	—	—
	79.4 3	94 3.69	132 5.19	3.7 8.12 c	—	—	—

c = Bronze casting; all others, drawn copper.

Size	No. 625-EN1057 Grv. x Grv. x Grv.			No. 626-EN1057 Grv. x Grv. x Cup			
	Actual Outside Dia. mm Inches	C to E mm Inches	C to B mm Inches	Approx. Wgt. kg Lbs.	C to E mm Inches	C to B mm Inches	Cup mm Inches
54.0 2.125 × 54.0 2.125 × 35.0 1.378	—	—	—	125 4.92	78 3.07	25 0.98	0.6 1.3
	42.0 1.654	—	—	125 4.92	78 3.07	29 1.14	0.4 0.9
	67.0 2.626 × 67.0 2.626 × 35.0 1.378	—	—	125 4.92	85 3.35	25 0.98	0.8 1.8
67.0 2.626 × 67.0 2.626 × 42.0 1.654	—	—	—	125 4.92	85 3.35	29 1.14	0.6 1.3
	54.0 2.125	83 3.27	86 3.39	0.7 c 1.5	—	—	—
	76.1 3.000 × 76.1 3.000 × 35.0 1.378	—	—	125 4.92	89 3.50	25 0.98	0.9 2.0
76.1 3.000 × 76.1 3.000 × 42.0 1.654	—	—	—	125 4.92	89 3.50	29 1.14	0.9 2.0
	54.0 2.125	76 2.99	86 3.39	1.0 c 2.2	—	—	—
	66.7 2.626	83 3.27	89 3.50	1.1 c 2.4	—	—	—
108.0 4.252 × 108.0 4.252 × 35.0 1.378	—	—	—	150 5.91	105 4.13	25 0.98	1.5 3.3
	42.0 1.654	—	—	103 4.06	100 3.94	42 1.65	1.6 3.5
	66.7 2.626	100 3.94	103 4.06	2.6 c 5.7	—	—	—
	76.1 3.000	106 4.17	106 4.17	4.6 c 10.1	—	—	—
133.0 5.236 × 133.0 5.236 × 35.0 1.378	—	—	—	99 3.90	96 3.78	25 0.98	1.9 4.2
	42.0 1.654	—	—	103 4.06	100 3.94	42 1.65	2.2 4.9
	54.0 2.125	+	+	+	—	—	—
	67.0 2.626	+	+	+	—	—	—
159.0 6.260 × 159.0 6.260 × 42.0 1.654	—	—	—	99 3.90	109 4.29	25 0.98	2.2 4.9
	54.0 2.125	+	+	+	—	—	—
	66.7 2.626	+	+	+	—	—	—
	76.1 3.000	+	+	+	—	—	—
183.0 7.205 × 183.0 7.205 × 54.0 2.125	—	—	—	106 4.17	130 5.12	4.4 c 9.7	—
	108.0 4.252	106 4.17	130 5.12	4.4 c 9.7	—	—	—
	133.0 5.236	119 4.69	132 5.20	5.1 11.2	—	—	—

c = Bronze casting; all others, drawn copper.


+ Contact Victaulic for details.

# Grooved Copper – Fittings


## Concentric Reducer – CTS

**NO. 650-CTS** Grv. x Grv.  
**NO. 652-CTS** Grv. x Cup

For Complete Information Request Publication **22.04**



NO. 650-CTS




NO. 652-CTS


## Concentric Reducer – EN1057

**NO. 650-EN1057** Grv. x Grv.  
**NO. 652-EN1057** Grv. x Cup

For Complete Information Request Publication **22.11**



NO. 650-EN1057



NO. 652-EN1057

Size	No. 650-CTS Grv. x Grv.			No. 652-CTS Grv. x Cup		
	Actual mm Nominal Inches	E to E mm Inches	Approx. Wgt. Each kg Lbs.	E to E mm Inches	Cup mm Inches	Approx. Wgt. Each kg Lbs.
54.0 2 × 28.6 1	—	—	—	69 2.70	23 0.91	0.2 0.50
	34.9 1 1/4	—	—	76 3.00	25 0.97	0.2 0.45
	41.3 1 1/2	—	—	75 2.94	28 1.09	0.2 0.45
66.7 2 1/2 × 28.6 1	—	—	—	83 3.25	23 0.91	0.4 0.78
	34.9 1 1/4	—	—	89 3.52	25 0.97	0.3 0.60
	41.3 1 1/2	—	—	88 3.45	28 1.09	0.3 0.65
	54.0 2	83 3.29	0.5 1.00	84 3.30	34 1.34	0.3 0.65
79.4 3 × 41.3 1 1/2	—	—	—	93 3.68	28 1.09	0.5 1.06
	54.0 2	64 2.50	0.4 0.95 c	104 4.10	34 1.34	0.5 0.99
	66.7 2 1/2	64 2.50	0.52 1.03 c	—	—	—
104.8 4 × 54.0 2	—	121 4.75	0.8 1.65 c	121 4.75	34 1.34	0.9 1.95
	66.7 2 1/2	76 3.00	0.9 1.95 c	—	—	—
	79.4 3	76 3.00	0.9 2.02 c	—	—	—
130.2 5 × 79.4 3	—	99 3.88	2.9 6.30 c	—	—	—
	104.8 4	86 3.38	2.9 6.30 c	—	—	—
	155.6 6 × 79.4 3	111 4.38	2.9 6.40 c	—	—	—
155.6 6 × 104.8 4	—	99 3.88	2.9 6.50 c	—	—	—
	130.2 5	86 3.38	3.0 6.70 c	—	—	—
	206.4 8 × 155.6 6	127 5.00	4.5 10.0 c	—	—	—

c = Bronze casting; all others, drawn copper.

Size	No. 650-EN1057 & No. 652-EN1057 Grv. x Grv. & Grv. x Cup			
	Actual Outside Dia. mm Inches	E to E mm Inches	Cup mm Inches	Approx. Wgt. Each kg Lbs.
54.0 2.125 × 35.0* 1.378	—	—	—	—
	—	42.0* 1.654	75 2.95	+
64.0 2.250 × 54.0 2.125	—	—	—	—
	—	35.0* 1.378	+	+
66.7 2.626 × 35.0* 1.378	—	—	—	—
	—	42.0* 1.654	88 3.46	+
	—	54.0 2.125	83 3.27	86 3.39
	—	54.0 2.125	64 2.52	—
76.1 3.000 × 54.0 2.125	—	—	—	—
	—	64.0 2.250	64 2.52	—
	—	66.7 2.626	64 2.52	—
88.9 3.500 × 54.0 2.125	—	—	—	—
	—	64.0 2.250	76 2.99	—
	—	76.1 3.000	76 2.99	—
108.0 4.252 × 54.0 2.125	—	—	—	—
	—	64.0 2.250	76 2.99	—
	—	66.7 2.626	76 2.99	—
	—	76.1 3.000	76 2.99	—
	—	88.9 3.500	76 2.99	—
133.0 × 76.1 3.000	—	—	—	—
	—	108.0 4.252	—	—
159.0 6.260 × 54.0 2.125	—	—	—	—
	—	66.7 2.626	—	—
	—	76.1 3.000	—	—
	—	108.0 4.252	—	—
	—	133.0 5.236	—	—

\* No. 652-EN1057; Cup connection

c = Bronze casting; all others, drawn copper.

+ Contact Victaulic for details.



# Grooved Copper – Valves

## Butterfly Valve

### SERIES 608-CTS

For Complete Information  
Request Publication **22.05**




Size	Dimensions									Approx. Wgt. Each	Flow Coefficient@ (Fully Open)
	Actual mm Nominal Inches	A End to End mm Inches	B mm Inches	C mm Inches	D mm Inches	E mm Inches	F mm Inches	G mm Inches	H mm Inches		
66.7 2½	96 3.77	155 6.12	46 1.81	77 3.02	—	67 2.63	57 2.25	59 2.31	2.0 4.4	281.1 325	
79.4 3	96 3.77	167 6.58	52 2.06	85 3.33	2 0.08	79 3.13	65 2.54	59 2.31	2.3 5.1	415.2 480	
104.8 4	118 4.63	235 9.25	70 2.75	131 5.15	3 0.13	105 4.13	81 3.19	72 2.82	4.8 10.5	519.0 600	
130.2 5	149 5.88	257 10.13	79 3.12	144 5.67	13 0.50	130 5.13	95 3.75	102 4.00	6.4 14.0	994.8 1150	
155.6 6	149 5.88	283 11.15	92 3.62	159 6.25	25 1.00	156 6.13	106 4.16	102 4.00	8.6 19.0	1600.3 1850	

@  $K_V/C_V$  values for flow of water at +16°C/+60°F with a fully open valve.


#### IMPORTANT NOTE:

All Series 608-CTS butterfly valves are bronze castings.


- Dead end service provided to full working pressure in both directions
- Pressure rated up to 2065 kPa/300 psi bubble-tight shut-off
- Sizes from 66.7 – 155.6 mm/ 2½ – 6" CTS

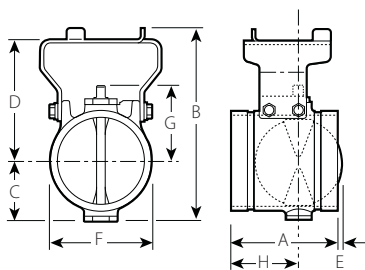

TYPICAL 66.7 – 79.4 mm/2½ – 3" SIZES

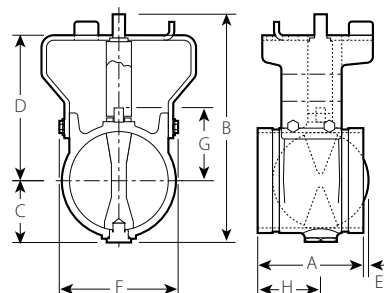

TYPICAL 104.8 – 130.2 mm/4 – 5" SIZES



TYPICAL 155.6 mm/6" SIZES

# Grooved Copper – Valves

## Butterfly Valve

### SERIES 608-AS

For Complete Information  
Request Publication 22.10




Size		Dimensions									Approx. Wgt. Each	Flow Coefficient@ (Fully Open)
Nominal Size mm	Actual Size mm Inches	A End to End mm Inches	B Height mm Inches	C mm Inches	D mm Inches	E mm Inches	F mm Inches	G mm Inches	H mm Inches	w/o Oper. kg Lbs.	K <sub>v</sub> Values C <sub>v</sub> Values	
DN65	63.5 2.50	96 3.77	151.9 5.98	43.9 1.73	98.0 3.86	—	63.5 2.50	55.4 2.18	59.0 2.31	1.9 4.1	281.1 325	
DN80	76.1 3.00	96 3.77	164.1 6.46	50.8 2.00	103.4 4.07	—	76.2 3.00	62.0 2.44	59.0 2.31	2.2 4.8	415.2 480	
DN100	101.6 4.00	118 4.63	226.3 8.91	67.3 2.65	129.3 5.09	—	101.6 4.00	79.5 3.13	71.0 2.79	4.8 9.5	519.0 600	
DN125	127.0 5.00	149 5.88	249.4 9.82	77.7 3.06	142.5 5.61	9.7 0.38	142.2 5.60	99.2 3.63	100.1 3.94	5.9 13	994.8 1150	
DN150	152.4 6.00	150 5.91	273.6 10.77	90.2 3.55	156.2 6.15	23.6 0.93	152.4 6.00	103.9 4.09	101.3 3.99	8.2 18.0	1600.3 1850	

@ K<sub>v</sub>/C<sub>v</sub> values for flow of water at +16°C/+60°F with a fully open valve.


#### IMPORTANT NOTE:

All Series 608-AS butterfly valves are bronze castings.


- Dead end service provided to full working pressure in both directions
- Pressure rated up to 2065 kPa/300psi bubble-tight shut-off
- Sizes from DN65–DN150mm/  
2½–6" AS

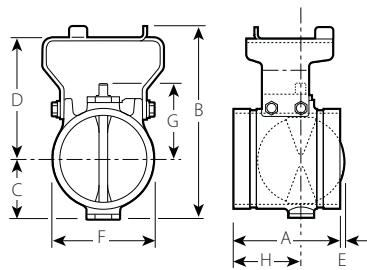

TYPICAL DN65–DN80 mm/2½–3" SIZES

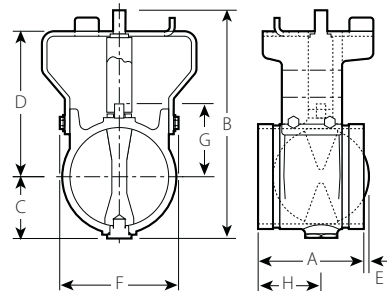

TYPICAL DN100–DN125 mm/4–5" SIZES



TYPICAL DN150 mm/6" SIZES

# Grooved Copper – Valves

## Butterfly Valve

### SERIES 608-EN1057

For Complete Information  
Request Publication **22.11**




- Dead end service provided to full working pressure in both directions
- Pressure rated up to 2065 kPa/300 psi bubble-tight shut-off
- Sizes from 66.7–76.1 mm/ 2½–3" EN1057

Size	Dimensions								Approx. Wgt. Each	Flow Coefficient@ (Fully Open)
	Actual Size mm Inches	A End to End mm Inches	B Height mm Inches	C mm Inches	D mm Inches	E mm Inches	F mm Inches	G mm Inches		
66.7 2.625	96 3.77	121 4.77	42.93 1.69	75.18 2.96	—	63.5 2.5	55.1 2.17	59 2.31	1.9 4.1	281.1 325
76.1 3.000	96 3.77	137 5.39	50.80 2.00	83.1 3.27	2 0.08	76.2 3.00	63.0 2.48	59 2.31	2.2 4.8	415.2 480

@  $K_v/C_v$  values for flow of water at +16°C/+60°F with a fully open valve.

#### IMPORTANT NOTE:

All Series 608-EN1057 butterfly valves are bronze castings.

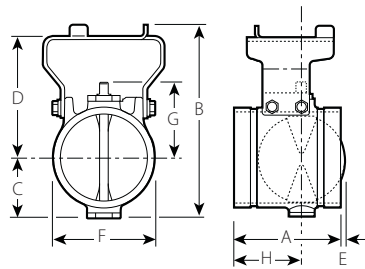

TYPICAL FOR ALL SIZES

# Grooved System for Aluminium Pipe

- Fast, easy and reliable method for joining aluminium pipe
- Fittings are supplied with grooves, ready to install
- Couplings and fittings cast of an aluminium alloy prepared for strength and durability



## Couplings

Flexible Coupling  
STYLE 77-A, PG. 12-2

Snap-Joint Coupling  
STYLE 78-A, PG. 12-3





## Fittings

90° Elbow  
NO. 10-A, PG. 12-4

45° Elbow  
NO. 11-A, PG. 12-4

Reducer  
NO. 50-A, PG. 12-5

Adaptor Nipple  
Grv. x Bev.  
NO. 42-A, PG. 12-5





Tee  
NO. 20-A, PG. 12-4

Cap  
NO. 60-A, PG. 12-4

Adaptor Nipple  
Grv. x Thd.  
NO. 40-A, PG. 12-5

Adaptor Nipple  
Grv. x Grv.  
NO. 43-A, PG 12-5



## PRODUCTS


- 1-1 Couplings
- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe**
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software

# Grooved System for Aluminium Pipe – Couplings


## Flexible Coupling

### STYLE 77-A

For Complete Information  
Request Publication **21.01**



- Designed with cross-ribbed construction
- Provides rugged, flexible mechanical joint for aluminium piping systems
- Cast of an aluminum alloy prepared for strength and durability with minimum weight
- Available in sizes 33.7 – 219.1 mm/1 – 8"



Size	Max. Work Pressure*	Max. End Load	Allow. Pipe End Sep. †	Dimensions			Approx. Wgt. Each
				X mm Inches	Y mm Inches	Z mm Inches	
33.7 1	3450 500	2890 650	0 – 1.6 0 – 1/16	61 2.38	105 4.12	44 1.75	0.3 0.6
42.4 1 1/4	3450 500	4670 1050	0 – 1.6 0 – 1/16	69 2.70	125 4.91	45 1.77	0.4 0.9
48.3 1 1/2	3450 500	5230 1400	0 – 1.6 0 – 1/16	77 3.03	133 5.23	45 1.77	0.5 1.1
60.3 2	3450 500	9790 2200	0 – 1.6 0 – 1/16	99 3.88	147 5.77	48 1.88	0.6 1.3
73.0 2 1/2	3450 500	14240 3200	0 – 1.6 0 – 1/16	108 4.25	162 6.38	48 1.88	0.7 1.5
88.9 3	3450 500	20025 4500	0 – 1.6 0 – 1/16	127 5.00	179 7.04	48 1.88	0.8 1.8
114.3 4	3450 500	35600 8000	0 – 3.2 0 – 1/8	162 6.38	223 8.78	54 2.13	0.4 3.0
141.3 5	3450 500	53400 12000	0 – 3.2 0 – 1/8	195 7.66	266 10.47	54 2.13	2.3 5.1
168.3 6	3450 500	75650 17000	0 – 3.2 0 – 1/8	229 9.00	299 11.77	54 2.13	2.7 6.0
219.1 8	2700 400	104575 23500	0 – 3.2 0 – 1/8	276 10.88	374 14.73	64 2.50	4.5 10.0
323.9 12	2070 300	170400 38300	0 – 3.2 0 – 1/8	394 15.50	486 19.15	65 2.56	5.9 13.0

\* Many pipe manufacturers (extruders) roll groove alloys 6061-T6 and 6063-T6 as the point of manufacture. Roll grooving is done successfully prior to the final T6 tempering of the pipe. Often pipe in the T6 tempered state cracks when roll grooved, depending upon the pipe's mechanical properties, which vary from pipe to pipe. Victaulic has no control over these varying properties and cannot assure that the T6 tempered grades can be successfully roll grooved.

Pressure Ratings and End Loads for cut grooved pipe are based upon tests on pipe prepared in accordance with Victaulic specifications.

Pressure Ratings and End Loads for roll grooved pipe are based upon tests on pipe prepared in accordance with Victaulic specifications using Victaulic Vic-Easy Roll Grooving tools. Use of other equipment may adversely affect joint performance.

Aluminum pipe ratings are based on: alloy 6061-T4/6063-T4 – Schedule 80 cut grooved, Schedule 40 toll or cut grooved, Schedule 30 – 8, 10 and 12" toll or cut grooved, schedule 5, 10 and 20 roll grooved ONLY; or alloy 6061-T6/6063-T6 – Schedule 40/80 cut grooved ONLY, schedule 30 – 8, 10 and 12" cut grooved ONLY, Schedule 5, 10 and 20 grooving is NOT RECOMMENDED.

† Allowable Pipe End Separation and Deflection figured show the maximum nominal range of movement available at each joint for standard roll grooved pipe. Figured or standard cut grooved pipe may be doubled. These figured are maximums; for design and installation purposes these figured should be reduced by: 50% for 26.9 – 101.6 mm (3/4 - 3 1/2"); 25% for 114.3 mm (4") and larger.

# Grooved System for Aluminium Pipe – Couplings


## Snap-Joint Coupling

### STYLE 78-A

For Complete Information  
Request Publication **21.02**



- Provides quick disconnect joint
- Provides a rugged, flexible mechanical joint for use on aluminum piping systems
- Cast of an aluminum alloy prepared for strength and durability with minimum weight
- Available in 50 and 250mm (2 and 10") sizes



Nominal Size	Actual Size	Max. Work Pressure*	Max. End Load	Allow. Pipe End Sep. †	Dimensions			Approx. Wgt. Each
					X mm Inches	Y mm Inches	Z mm Inches	
50 2	60.3 2.375	2065 300	28170 6330	0 – 1.6 0 – 0.06	102 4.00	124 4.88	47 1.84	0.5 1.2
250 10	273.0 10.750	345 50	20180 4535	0 – 3.2 0 – 0.13	332 13.06	389.5 15.60	64 2.50	4.5 9.9

\* Many pipe manufacturers (extruders) roll groove alloys 6061-T6 and 6063-T6 as the point of manufacture. Roll grooving is done successfully prior to the final T6 tempering of the pipe. Often pipe in the T6 tempered state cracks when roll grooved, depending upon the pipe's mechanical properties, which vary from pipe to pipe. Victaulic has no control over these varying properties and cannot assure that the T6 tempered grades can be successfully roll grooved.

Pressure Ratings and End Loads for cut grooved pipe are based upon tests on pipe prepared in accordance with Victaulic specifications.

Pressure Ratings and End Loads for roll grooved pipe are based upon tests on pipe prepared in accordance with Victaulic specifications using Victaulic Vic-Easy Roll Grooving tools. Use of other equipment may adversely affect joint performance.

Aluminum pipe ratings are based on: alloy 6061-T4/6063-T4 – Schedule 80 cut grooved, Schedule 40 toll or cut grooved, Schedule 30 – 8, 10 and 12" toll or cut grooved, schedule 5, 10 and 20 roll grooved ONLY; or alloy 6061-T6/6063-T6 – Schedule 40/80 cut grooved ONLY, schedule 30 – 8, 10 and 12" cut grooved ONLY, Schedule 5, 10 and 20 grooving is NOT RECOMMENDED.


† Allowable Pipe End Separation and Deflection figured show the maximum nominal range of movement available at each joint for standard roll grooved pipe. Figured or standard cut grooved pipe may be doubled. These figured are maximums; for design and installation purposes these figured should be reduced by: 50% for 26.9 – 101.6 mm (¾ - 3 ½"); 25% for 114.3 mm (4") and larger.

# Grooved System for Aluminium Pipe – Fittings


## Elbow, Tee and Cap

- NO. 10-A** 90° Elbow
- NO. 11-A** 45° Elbow
- NO. 20-A** Tee
- NO. 60-A** Cap


For Complete Information  
Request Publication **21.03**



**NO. 10-A**



**NO. 11-A**



**NO. 20-A**



**NO. 60-A**

Size		No. 10-A 90° Elbow		No. 11-A 45° Elbow		No. 20-A Tee		No. 60-A † Cap	
Nominal Size mm Inches	Pipe Outside Dia. mm Inches	C to E mm Inches	Approx. Weight Each kg Lbs.	C to E mm Inches	Approx. Weight Each kg Lbs.	C to E mm Inches	Approx. Weight Each kg Lbs.	Thickness T mm Inches	Approx. Weight Each kg Lbs.
25 1	33 1.315	57 2.25	0.1 0.2	44 1.75	0.1 0.1	57 2.25	0.2 0.4	22 0.88	0.1 0.1
40 1½	48 1.900	70 2.75	0.2 0.4	44 1.75	0.1 0.3	70 2.75	0.3 0.7	22 0.88	0.1 0.2
50 2	60 2.375	83 3.25	0.3 0.7	51 2.00	0.2 0.5	83 3.25	0.5 1.0	22 0.88	0.1 0.3
65 2½	73 2.875	95 3.75	0.5 1.0	57 2.25	0.3 0.7	95 3.75	0.7 1.5	22 0.88	0.1 0.3
80 3	89 3.500	108 4.25	0.7 1.6	64 2.50	0.6 1.3	108 4.25	1.0 2.3	22 0.88	0.2 0.5
100 4	114 4.500	127 5.00	1.4 3.0	75 3.00	0.9 1.9	127 5.00	1.9 4.1	25 1.00	0.4 1.0
125 5	141 5.563	140 5.50	2.4 5.2	83 3.25	1.5 3.3	140 5.50	3.0 6.7	25 1.00	1.0 2.1
150 6	168 6.625	165 6.50	3.0 6.5	89 3.50	2.4 5.2	165 6.50	4.1 9.1	25 1.00	1.4 3.0
200 8	219 8.625	197 7.75	6.4 14.0	108 4.25	3.7 8.2	197 7.75	8.4 18.4	30 1.19	2.7 6.0

† Cap does not extend beyond coupling when assembled.

# Grooved System for Aluminium Pipe

## Reducer

**NO. 50-A**

For Complete Information  
Request Publication **21.03**



**NO. 50-A**

Size		E to Et		Approx. Weight Each
mm	Inches	mm	Inches	kg
				Lbs.
40	1½ ×	25	64	0.1
1		2.50	0.2	
50	2 ×	25	64	0.1
1		2.50	0.2	
40	1½ ×	40	64	0.1
1½		2.50	0.3	
80	3 ×	25	64	0.3
1		2.50	0.7	
50		64	0.3	
2	2.50	0.6		
65	2½	64	0.2	
2½	2.50	0.5		
100	4 ×	25	76	0.4
1		3.00	0.9	
50		76	0.5	
2	3.00	1.1		
65	76	0.5		
2½	3.00	1.0		
150	6 ×	80	102	1.0
3		4.00	2.3	
100	4 ×	100	102	1.0
4		4.00	2.3	
200	8 ×	100	127	2.7
4		5.00	6.0	
160	6 ×	127	2.7	
6		5.00	6.0	

## Adaptor Nipples

**NO. 40-A** Grv. x Thd.

**NO. 42-A** Grv. x Bev.

**NO. 43-A** Grv. x Grv.

For Complete Information  
Request Publication **21.03**



**NO. 40-A**



**NO. 42-A**



**NO. 43-A**

Size		E to Et		Approx. Weight Each
mm	Inches	mm	Inches	kg
				Lbs.
25	1	76	0.1	
1		3.00	0.3	
40	1½	102	0.2	
1½		4.00	0.4	
50	2	102	0.2	
2		4.00	0.5	
65	2½	102	0.3	
2½		4.00	0.6	
80	3	102	0.4	
3		4.00	0.8	
100	4	125	0.7	
4		6.00	1.5	
125	5	125	1.1	
5		6.00	2.5	
150	6	125	1.5	
6		6.00	3.3	
200	8	125	2.3	
8		6.00	5.0	

\* Made of standard weight aluminum

† Other lengths available. Contact Victaulic for details.





# Depend-O-Lok System

The Victaulic Depend-O-Lok joining system represents a new generation of technologically advanced couplings.

The design of Victaulic Depend-O-Lok couplings allows for out-of-round pipe – making it easier to install than competitive joining methods. Couplings can be designed to meet almost any application or service criteria and provides a reliable, economical alternative to traditional bolted sleeve-type couplings.


For Complete Information Request Publication **PB-257**




**E x E** Request Publication 60.10  
**F x F** Request Publication 60.11  
**F x E** Request Publication 60.12




## Victaulic Depend-O-Lok Couplings

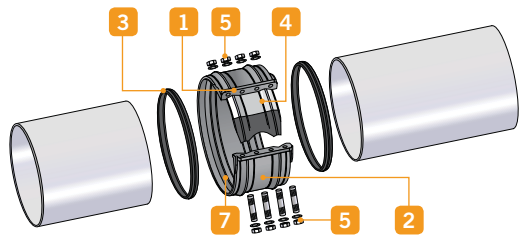

**(E x E) Bolted Split-Sleeve Flexible Coupling**  
 Unrestrained, flexible bottle-tight joints

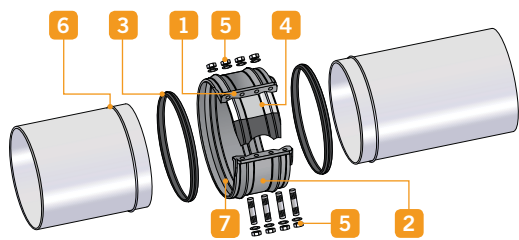

**(F x F) Bolted Split-Sleeve Restrained Flexible Coupling**  
 Fully restrained pipe joints without external harnessing

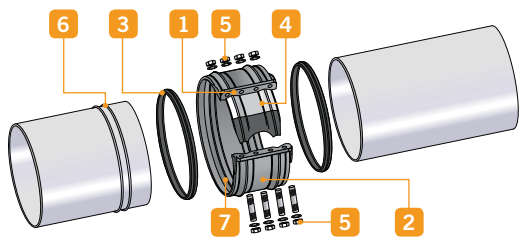

**(F x E) Bolted Split-Sleeve Expansion Couplings**  
 Pipe joints that provide for thermal expansion and contraction

## Coupling Components and Benefits

- 1 CLOSURE PLATES**  
 Simplify installation by enabling the coupling to seal with fewer bolts (than ordinary sleeve type couplings), and to pull pipes into alignment. This also allows the coupling to be provided in multiple segments, when needed, for ease of handling or installation on existing pipe.
- 2 SPLIT-SLEEVE (BODY)**  
 Designed for both high and low pressure applications and maximum pipe protection on “out of round” pipe. The “double arch” shape of the sleeve provides high section modulus and strengthens the pipe joint. Coupling installation is accomplished without the need for jacks, wedges, or sledge hammers. Harness lugs, if required, can be shorter.
- 3 O-RINGS**  
 Proven effective during more than 80 years of use.
- 4 SEALING PLATE/PAD**  
 Ensures leak-tight seal on joints.
- 5 BOLTS AND NUTS**  
 Sized to provide yield strength greater than the hoop strength of the coupling body, and utilize flat washers. Stainless steel or hot dipped galvanized bolts are available.
- 6 RESTRAINT RINGS (PROVIDED)**  
 Must be welded to pipe ends providing the means by which the D-O-L coupling restrains the pipe within the coupling.
- 7 SHOULDERS**  
 The shoulders close over the pipe on the outside of the restraint rings to provide end load resistance.

# Depend-O-Lok System



Victaulic Depend-O-Lok couplings are made to meet the individual needs of piping projects. With this ability to customize the coupling to the project specifications Victaulic Depend-O-Lok products are used on a wide variety of systems.

One of the more unusual applications for the Victaulic Depend-O-Lok couplings was a fish bypass line that was installed to help salmon avoid a river dam in their annual migration. Victaulic Depend-O-Lok couplings allowed for the expansion and contraction needed for this type of system while also reducing installation time and costs.

## FluidMaster/ AirMaster



- Designed to provide fully restrained joints for air and fluid-conveying pipelines
- Shouldered couplings that are designed to operate at design pressures of the system
- Complete line of expansion joints

## Expansion Joint



- Offers solutions for accommodating thermal expansion and contraction of pipelines

- Products include:

### **OmniFlex Stainless Steel Bellows-Type Expansion Joints**

Can also accommodate lateral movement

### **Victaulic Depend-O-Lok Bolted Split-Sleeve Expansion Couplings**

Accommodates expansion/contraction up to 165.1 mm/6½"

### **Paragon Expansion Joints**

Fabricated mechanical expansion joints

## PRODUCTS

- 1-1 Couplings
- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System**
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software

# Vic-Ring System

- Designed with cross-ribbed construction to provide a strong component for Vic-Ring adaptor prepared piping systems
- Available in sizes up to 1675mm/66"

## Couplings

### Vic-Ring Coupling

STYLE 22, PG. 14-2



### Vic-Ring Coupling

STYLE 31, PG. 14-3



### Vic-Ring Coupling

STYLE 41, PG. 14-4



### Vic-Ring Coupling

STYLE 44, PG. 14-5



## PRODUCTS

- 1-1 Couplings
- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System**
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software

# Vic-Ring System

## Vic-Ring Coupling

### STYLE 22

For Complete Information  
Request Publication **16.02**




Size		Max. Joint Work Pressure†	Max. Permiss. End Load	Max. Allow. Pipe End Movement‡	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches	kPa psi	N Lbs.	mm Inches	X mm Inches	Y mm Inches	Z mm Inches	kg Lbs.
425 17	432.6 17.031	1379 200	202400 45500	4.8 3/16	510 20.06	595 23.41	78 3.06	28.1 62.0
500 20	532.6 20.969	1379 200	306900 69000	6.4 1/4	616 24.25	718 28.25	94 3.69	38.6 85.0
600 24	628.6 24.750	1379 200	427000 96000	6.4 1/4	721 28.38	812 31.97	87 3.44	56.7 125.0
750 30	787.4 31.000	1034 150	502650 113000	6.4 1/4	921 36.25	1027 40.45	127 5.00	62.6 138.0
832 33	914.4 36.000	620 90	407000 91500	12.7 1/2	998 39.31	1119 44.04	127 5.00	88.5 195.0
900 36	965.2 38.000	620 90	453700 102000	9.7 3/8	1067 42.00	1204 47.39	121 4.75	113.4 250.0
1500 60	1612.9 63.500	345 50	702800 158000	9.7 3/8	1712 67.38	1875 73.82	124 4.88	206.4 455.0

† FOR ONE TIME FIELD TEST ONLY, the Maximum Joint Working Pressure may be increased to 1 1/2 times the figures shown

‡ Refer to Design Data for information on tolerances and pipe gap settings

- Designed with cross-ribbed construction to provide a strong component for Vic-Ring adaptor prepared piping systems
- Primarily for use with Type "A" Vic-Ring adaptors, depending upon sizes and pressures
- Sizes 425-600 mm (17-24") case in four segments; 750-900 mm (30-36") in six segments; and 1500 mm (60") in 10 segments, to assure concentricity and ease of handling
- Available in sizes 425-1500 mm (17-60")

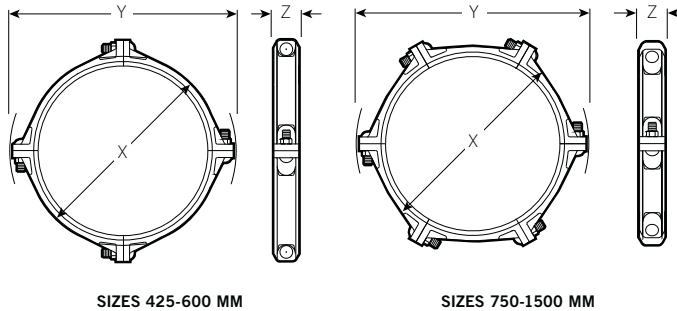

# Vic-Ring System

## Vic-Ring Coupling

### STYLE 31

For Complete Information  
Request Publication **16.03**




Size		Max. Joint Work Pressure†	Max. Permiss. End Load	Max. Allow. Pipe End Movement‡	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches				X mm Inches	Y mm Inches	Z mm Inches	
350	355.6	1725	204763	4.0	437	558	70	18.1
14	12.000	250	46036	5/32	17.21	21.96	2.75	40.0
400	406.4	1725	332087	6.4	506	622	89	27.7
16	16.000	250	74660	1/4	19.92	24.50	3.50	61.0
450	457.0	1200	285895	6.4	560	669	89	33.1
18	18.000	175	64275	1/4	22.03	26.33	3.50	73.0
500	508.0	1200	407437	6.4	613	729	89	39.5
20	20.000	175	91600	1/4	24.13	28.69	3.50	87.0
600	610.0	1035	536430	11.9	719	840	89	42.2
24	24.000	150	120600	7/16	29.31	33.06	3.50	93.0
750	762	1035	768615	11.9	890	1001	111	73.5
30	30.000	150	172800	7/16	35.02	39.39	4.38	162.0
900	914.0	1035	769030	11.9	1056	1169	113	90.7
36	36.000	150	172815	7/16	41.56	46.06	4.44	200.0

† FOR ONE TIME FIELD TEST ONLY, the Maximum Joint Working Pressure may be increased to 1 1/2 times the figures shown

‡ Refer to Design Data for information on tolerances and pipe gap settings

- Designed with cross-ribbed construction to provide a strong component for Vic-Ring adaptor prepared piping systems
- Primarily for use with Type "D" or "E" Vic-Ring adaptors
- Sizes 350-500 mm (14-20") are case in four segments; 600-900 mm (24-36") in six segments, to assure concentricity and ease of handling.
- Available in sizes 350-900 mm (14-36")

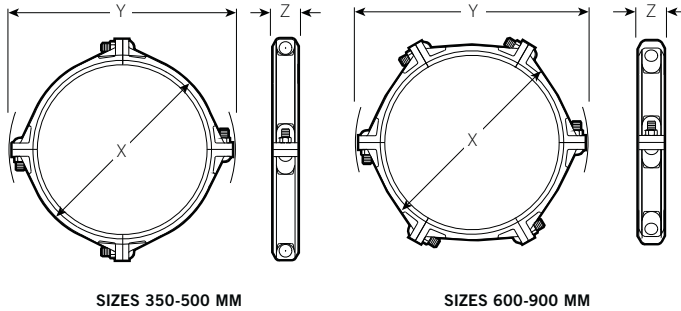

# Vic-Ring System

## Vic-Ring Coupling

### STYLE 41

For Complete Information  
Request Publication **16.04**




- Designed with cross-ribbed construction to provide a strong component for Vic-Ring adaptor prepared piping systems
- Commonly used with Type "E" Vic-Ring adapters
- Sizes 750-950 mm (30-38") are cast in six segments 1050-1375 mm (42-54") sizes in eight segments; 1500 mm (60") in 10 segments; and 1675 mm (66") in 12 segments, to assure concentricity and ease of handling
- Available in sizes 750-1675 mm (30-66")

Size		Max. Joint Work Pressure†	Max. Permiss. End Load	Max. Allow. Pipe End Movement‡	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches				X mm Inches	Y mm Inches	Z mm Inches	
750 30	762.0 30.00	620 90	342500 77000	12.7 1/2	921 36.25	1051 41.38	127 5.00	80.7 178.0
900 36	914.0 36.000	620 90	482150 108400	12.7 1/2	1080 42.50	1197 47.13	130 5.13	93.0 205.0
950 38	965.2 38.000	620 90	526650 118400	12.7 1/2	1124 44.50	1251 49.25	130 5.13	99.8 220.0
1050 42	1067.0 42.000	620 90	652550 146700	12.7 1/2	1248 49.13	1409 55.50	130 5.13	122.5 270.0
1150 46	1168.4 46.000	620 90	747300 168000	12.7 1/2	1327 52.25	1502 59.13	137 5.38	149.7 330.0
1200 48	1219.2 48.000	620 90	849600 191000	12.7 1/2	1416 55.75	1594 62.75	133 5.25	176.9 390.0
1375 54	1371.6 54.000	620 90	1076450 242000	12.7 1/2	1581 62.25	1778 70.00	137 5.38	213.2 470.0
1500 60	1524.0 60.000	620 90	1315300 295700	12.7 1/2	1743 68.63	1943 76.50	140 5.50	258.6 570.0
1675 66	1675.4 66.000	620 90	1574200 353900	12.7 1/2	1901 74.83	2061 81.25	143 5.63	340.2 750.0

† FOR ONE TIME FIELD TEST ONLY, the Maximum Joint Working Pressure may be increased to 1 1/2 times the figures shown

‡ Refer to Design Data for information on tolerances and pipe gap settings



SIZES 750-950 MM

# Vic-Ring System

## Vic-Ring Coupling

### STYLE 44

For Complete Information  
Request Publication **16.05**




- Designed with cross-ribbed construction to provide a strong component for Vic-Ring adaptor prepared piping systems
- Sizes 100-300 mm (4-12") are cast in two segments; 350-500 mm (14-20") sizes in four segments; 600-900 mm (24-36") in six segments; 1050-1375 mm (42-54") in eight segments; and 1500 mm (60") in 10 segments, to assure concentricity and ease of handling
- Available in sizes 100-1500 mm (5-60")

Size		Max. Joint Work Pressure†	Max. Permiss. End Load	Max. Allow. Pipe End Movement‡	Dimensions			Approx. Wgt. Each
Nominal Size mm Inches	Actual Outside Dia. mm Inches				X mm Inches	Y mm Inches	Z mm Inches	
100	114.3	1206	17170	4.8	178	245	57	3.6
4	4.500	175	3860	3/16	7.00	9.65	2.25	8.0
150	168.3	1206	34250	4.8	235	306	60	5.0
6	6.625	175	7700	3/16	9.25	12.05	2.38	11.0
200	219.1	1206	57800	4.8	305	381	67	7.7
8	8.625	175	13000	3/16	12.00	15.00	2.63	17.0
250	273.0	1206	87600	6.4	362	450	73	10.4
10	10.750	175	19700	1/4	14.25	17.75	2.88	23.0
300	323.9	1206	124100	6.4	425	509	76	14.1
12	12.750	175	27900	1/4	16.75	20.03	3.00	31.0
350	355.6	1206	165000	6.4	480	578	92	19.5
14	14.000	175	37100	1/4	18.88	22.75	3.63	43.0
400	406.4	1206	209050	9.7	538	652	92	28.6
16	16.000	175	47000	3/8	21.23	25.68	3.63	63.0
450	457.0	1206	267750	6.4	626	717	95	28.6
18	18.000	175	60200	1/4	24.63	28.25	3.75	85.0
500	508.0	1206	319800	9.7	668	784	95	40.8
20	20.000	175	71900	3/8	26.25	30.88	3.75	90.0
600	610.0	1206	449700	9.7	768	889	95	48.5
24	24.000	175	101100	3/8	30.25	35.00	3.75	107.0
750	762.0	1206	696600	12.7	959	1098	137	102.1
30	30.000	175	154400	1/2	37.75	43.21	5.38	225.0
900	914.0	1206	987250	12.7	1127	1270	137	122.5
36	36.000	175	221950	1/2	44.38	50.00	5.38	270.0
1050	1067.0	1206	1328900	12.7	1289	1461	137	172.4
42	42.000	175	298750	1/2	50.75	57.50	5.38	380.0
1200	1219.2	1206	1725900	12.7	1467	1600	140	233.6
48	48.000	175	388000	1/2	57.75	63.00	5.50	515.0
1375	1371.6	1206	2177580	12.7	1642	1791	143	279.3
54	54.000	175	489600	1/2	64.63	70.50	5.63	615.0
1500	1524.0	1206	2678250	12.7	1813	1956	146	312.1
60	60.000	175	602100	1/2	71.38	77.00	5.75	688.0

† FOR ONE TIME FIELD TEST ONLY, the Maximum Joint Working Pressure may be increased to 1 1/2 times the figures shown

‡ Refer to Design Data for information on tolerances and pipe gap settings

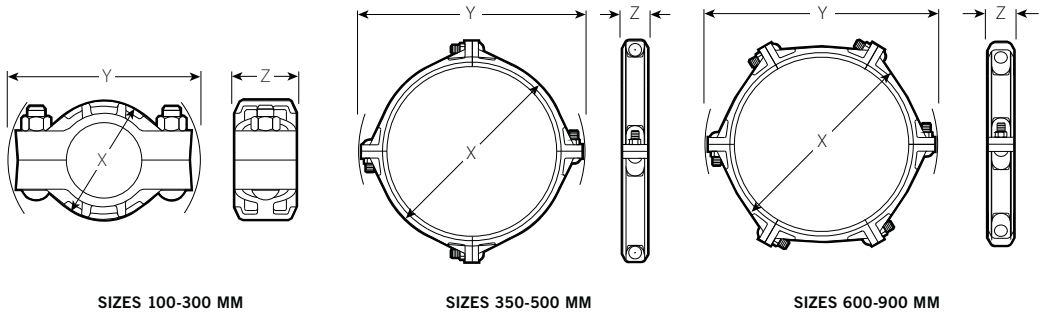






# Aquamine Reusable PVC Products

Introducing the Aquamine system. Aquamine is a complete line of high impact resistant, reusable PVC pipe, fittings, valves and specialty items. Because of its superior strength and flexibility as well as other critically important features, Aquamine has become one of the leading products in its field, consistently providing the competitive edge in efficiency and productivity.

For Complete Information  
Request Publication 50.01

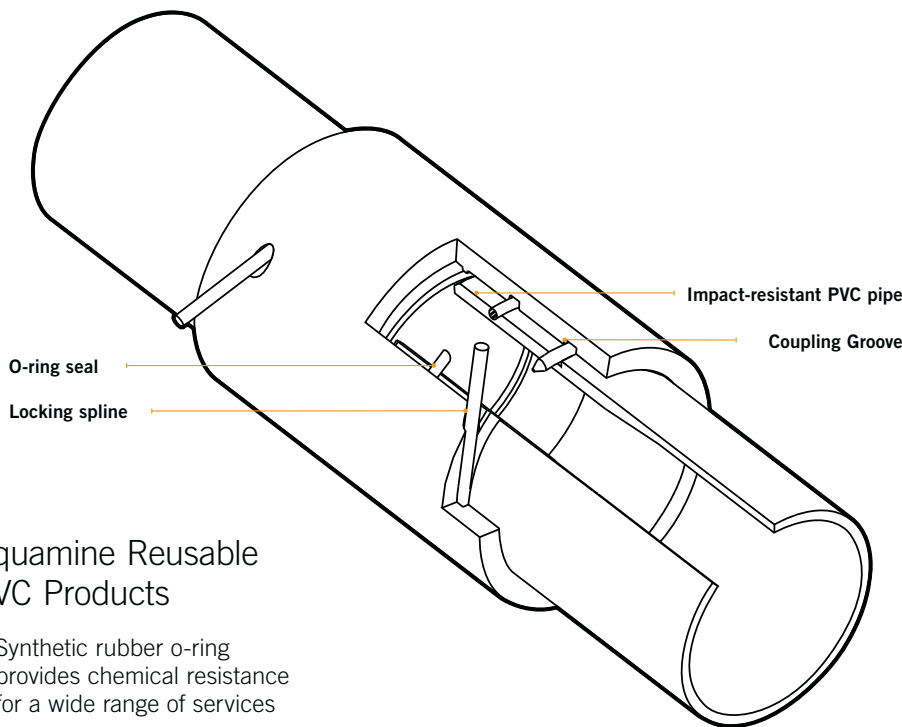

## Aquamine Reusable PVC Products

- Synthetic rubber o-ring provides chemical resistance for a wide range of services
- High impact resistant PVC pipe and coupling provide strong piping components
- Spline assembly combines maximum strength by engaging into grooves in both the coupling and the pipe
- Thickened pipe end provides joint reinforcement and security
- Lightweight, reusable design makes Aquamine ideal for a wide variety of water services

## PRODUCTS

- 1-1 Couplings
- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products**
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software

# Aquamine Reusable PVC Products

## Aquamine Pipe with Coupling


### Style 2900

For Complete Information, Request Publication 50.01.

- Aquamine pipe sold in 20ft. lengths with one coupling included
- Rated up to 350psi/2413 kPa
- Available in sizes 2-12"/50-300mm

Size Nominal Size mm Inches	Dimensions				Weight Per Ft. kg Lbs.
	SDR	Press. Rating Kpa/psi	Pipe O.D. mm/In.	Minimum Wall mm/In.	
50 2	17	1724 250	60.3 2.375	3.56 0.140	0.3 0.69
	21	1379 200	60.3 2.375	2.88 0.113	0.3 0.57
80 3	17	1724 250	88.9 3.500	5.21 0.206	0.7 1.46
	21	1379 200	88.9 3.500	4.24 0.167	0.5 1.19
100 4	12.4	2413 350	114.3 4.500	9.22 0.383	1.3 2.96
	17	1724 250	114.3 4.500	6.73 0.285	1.1 2.40
	21	1379 200	114.3 4.500	4.39 0.173	0.7 1.60
	28	1103 160	114.3 4.500	4.39 0.173	0.7 1.60
150 6	12.4	2413 350	168.3 6.625	13.56 0.534	2.9 6.42
	17	1724 250	168.3 6.625	9.91 0.390	2.4 5.20
	21	1379 200	168.3 6.625	8.03 0.316	1.9 4.26
	28	1103 160	168.3 6.625	6.48 0.255	1.6 3.46
200 8	12.4	2413 350	219.1 8.625	17.88 0.696	5.0 11.03
	17	1724 250	219.1 8.625	12.90 0.508	4.0 8.81
	21	1379 200	219.1 8.625	10.41 0.410	3.3 7.21
	28	1103 160	219.1 8.625	8.43 0.332	2.7 5.91
250 10	26	1103 160	273.1 10.750	10.49 0.413	4.2 9.20
300 12	26	1103 160	323.9 12.750	12.45 0.490	5.9 12.98


\* Pressure rating of these items are limited by the pressure rating of the coupling.

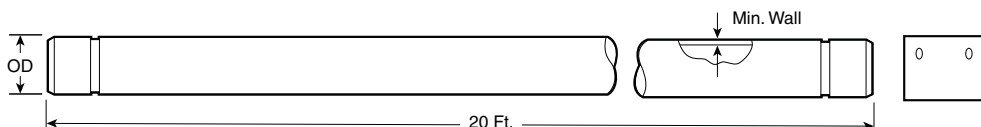

## Aqua Link Coupling (ALF x ALF)

### No. 2904

For Complete Information, Request Publication 50.01.




Size Nominal Size mm Inches	Press. Rating Kpa/psi	Dimensions		Weight kg Lbs.
		L mm Inches	O.D. mm Inches	
50 2	1724	133.35	81.28	0.4
	250	5.25	3.20	0.9
80 3	1724	184.15	81.28	0.9
	250	7.25	4.38	1.9
100 4	1724	209.55	81.28	1.4
	250	8.25	5.47	3.1
100 4HP	2413	209.55	152.40	2.3
	350	8.25	6.00	5.0
150 6	1724	209.55	199.14	2.5
	250	8.25	7.84	5.6
150 6HP	2413	209.55	221.49	4.8
	350	8.25	8.72	10.5
200 8	1379	241.30	258.83	5.0
	200	9.50	10.19	11.1
200 8	1724	241.30	258.83	5.0
	250	9.50	10.19	11.1
200 8HP	2413	241.30	273.05	6.9
	350	9.50	10.75	15.2
250 10	1103	304.80	315.98	8.2
	160	12.00	12.44	18.0
300 12	1103	304.80	372.11	11.0
	160	12.00	14.65	24.2

# Aquamine Reusable PVC Products

## Aqua Link 90° Elbow (ALM x ALM)

Style 2910

For Complete Information, Request Publication 50.01.




Size		Dimensions		Weight
Nominal Size mm Inches	Press. Rating Kpa/psi	L mm Inches	O.D. mm Inches	kg Lbs.
50 2	1724 250	203.20 8.00	60.33 2.375	0.8 1.8
80 3	1724 250	276.35 10.88	88.90 3.500	2.1 4.6
100 4	1724 250	314.45 12.38	114.30 4.500	3.6 8.0
150 6	1724 250	397.00 15.63	168.28 6.625	8.9 19.6
200 8	1379 200	457.20 18.00	219.08 8.625	15.6 34.4
250 10	1103 160	637.54 25.10	273.05 10.750	25.9 57.2
300 12	1103 160	652.78 25.70	323.85 12.750	38.1 83.9

## Aqua Link 45° Elbow (ALM x ALM)

no. 2912

For Complete Information, Request Publication 50.01.




Size		Dimensions		Weight
Nominal Size mm Inches	Press. Rating Kpa/psi	L mm Inches	O.D. mm Inches	kg Lbs.
50 2	1724 250	196.85 7.75	60.33 2.375	0.8 1.7
80 3	1724 250	247.65 9.75	88.90 3.500	1.8 3.9
100 4	1724 250	298.45 11.75	114.30 4.500	3.2 7.0
150 6	1724 250	330.20 13.00	168.28 6.625	7.4 16.4
200 8	1379 200	381.00 15.00	219.08 8.625	13.0 28.7
250 10	1103 160	464.82 18.30	273.05 10.750	21.5 47.4
300 12	1103 160	476.25 18.75	323.85 12.750	33.0 72.7

## Aqua Groove End Cap (ALM)

No. 2915

For Complete Information, Request Publication 50.01.




Size		Dimensions		Weight
Nominal Size mm Inches	Press. Rating Kpa/psi	L mm Inches	O.D. mm Inches	kg Lbs.
50 2	1724 250	190.5 7.50	60.33 2.375	0.5 1.0
80 3	1724 250	254.0 10.00	88.90 3.500	1.0 2.2
100 4	1724 250	279.4 11.00	114.30 4.500	1.7 3.7
150 6	1724 250	355.6 14.00	168.28 6.625	3.9 8.5
200 8	1379 200	444.5 17.50	219.08 8.625	7.0 15.5
250 10	1103 160	469.9 18.50	273.05 10.750	10.2 22.4
300 12	1103 160	495.3 19.50	323.85 12.750	14.5 32.0

# Aquamine Reusable PVC Products

## Aqua Groove x Flange Transition (ALM x FLG)

No. 2916

For Complete Information,  
Request Publication 50.01.




Size		Dimensions		Weight
Nominal Size mm Inches	Press. Rating Kpa/psi	L mm Inches	O.D. mm Inches	kg Lbs.
50 2	1034 150	184.15 7.25	60.33 2.375	0.7 1.5
80 3	1034 150	234.95 9.25	88.90 3.500	1.5 3.2
100 4	1034 150	260.35 10.25	114.30 4.500	2.4 5.2
150 6	1034 150	311.15 12.25	168.28 6.625	4.5 10.0
200 8	1034 150	352.55 13.88	219.08 8.625	7.3 16.0
250 10	1034 150	419.10 16.50	273.05 10.750	11.6 25.5
300 12	1034 150	419.10 16.50	323.85 12.750	17.2 37.9

## Aqua Link Tee (ALM x ALM x ALM)

No. 2917

For Complete Information,  
Request Publication 50.01.




Size		Dimensions		Weight
Nominal Size mm Inches	Press. Rating Kpa/psi	L mm Inches	O.D. mm Inches	kg Lbs.
50 2	1724 250	419.10 16.50	60.33 2.375	1.2 2.6
80 3	1724 250	546.10 21.50	88.90 3.500	2.9 6.5
100 4	1724 250	628.65 24.75	114.30 4.500	4.8 10.5
150 6	1724 250	787.40 31.00	168.28 6.625	12.3 27.1
200 8	1379 200	920.75 36.25	219.08 8.625	12.6 27.8
250 10	1103 160	1152.65 45.38	273.05 10.750	19.3 42.6
300 12	1103 160	1143.00 45.00	323.85 12.750	27.2 60.0

## Aqua Link Reducing Tee (ALM x ALM x ALM)

No. 2918

For Complete Information,  
Request Publication 50.01.




Size		Dimensions		Weight	
Nominal Size mm Inches	Press. Rating Kpa/psi	L mm Inches	O.D. mm Inches	kg Lbs.	
80 3	1724 250	190.5 7.50	60.33 2.375	0.5 1.0	
100 4	1724 250	254.0 10.00	88.90 3.500	1.0 2.2	
150 6	1724 250	100 4	279.4 11.00	114.30 4.500	1.7 3.7
		150 6	355.6 14.00	168.28 6.625	3.9 8.5
		200 8	444.5 17.50	219.08 8.625	7.0 15.5
		250 10	469.9 18.50	273.05 10.750	10.2 22.4
200 8	1103 160	300 12	495.3 19.50	323.85 12.750	14.5 32.0
		300 12	495.3 19.50	323.85 12.750	14.5 32.0
		300 12	495.3 19.50	323.85 12.750	14.5 32.0

# Aquamine Reusable PVC Products

## Aquamine Formed Outlet Fitting

Nos. 2937, 2938 and 2939

For Complete Information, Request Publication 50.01.



Size			Maximum Working Pressure – kPa/psi		
Nominal Size mm Inches	L mm Inches	O.D. mm Inches	Style 2937	Style 2938	Style 2939
			1" NPT Tap	1 1/2" NPT	2" NPT Tap
50	184.15	60.33	1725	–	–
2	7.25	2.375	250	–	–
80	234.95	88.90	1725	1725	–
3	9.25	3.500	250	250	–
100	260.35	114.30	1725	1725	1725
4	10.25	4.500	250	250	250
300	419.10	323.85	1725	1725	1725
12	16.50	12.750	250	250	250


NOTE: The pressure ratings noted above are based upon the capability of the female threaded socket. If a plastic threaded pipe nipple is used, the rating will be based upon values cited in ASTM-D1785 for Schedule 80 threaded pipe nipples.

## Aquamine® Butterfly Valve

For Complete Information, Request Publication 50.01.

Size		Dimensions					Weight
Nominal Size mm Inches	Actual Size	End to End A	Overall Height B	C	D	E	kg Lbs.
50	60.3	183	139	48	103	91	1.5
2	2.375	7.20	5.47	1.88	4.06	3.59	3.3
80	88.9	269	181	70	143	111	2.7
3	3.500	10.61	7.12	2.76	5.63	4.37	6.0
100	114.3	305	258	89	178	169	6.4
4	4.500	12.00	10.15	3.50	7.00	6.65	14.0
150	168.3	318	321	114	241	220	12.7
6	6.625	12.50	12.65	4.50	9.50	8.65	28.0

- Rated for 250psi/1735 kPa to provide reliable, leak-free, dead-end service
- Available in sizes 2-6"/50-150mm
- Valve consists of PVC body, external ductile iron upper and lower housings, Grade "T" nitrile coated disc, bronze upper and lower bushings and two-position handle.

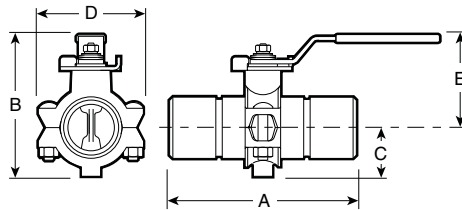


# Aquamine Reusable PVC Products

## Aquamine Plain End Pipe Coupling

### Style 2970

For Complete Information, Request Publication 50.01.




- Requires no pipe preparation, solvent or cure time
- Rugged ductile iron with patented, specially formed integral gripping teeth which engage into the pipe to secure it as the bolts are tightened metal-to-metal
- Available in sizes 2-8"/50-200mm

Size		Dimensions millimeters/Inches			Bolt/Nut No. - Size Inches	Weight
Nominal Size mm Inches	Press. Rating Kpa/psi	X	Y	Z		
50 2	60.3 2.375	92 3.64	151 5.94	92 3.62	2 - 1/2 X 2 1/2	1.6 3.5
80 3	88.9 3.500	116 4.58	177 6.95	116 4.56	4 - 1/2 X 2 3/4	3.5 7.7
100 4	114.3 4.500	149 5.88	205 8.09	147 5.78	4 - 1/2 X 2 3/4	5.3 11.6
150 6	168.3 6.625	203 8.00	275 10.84	149 5.88	4 - 5/8 X 3 1/4	7.4 16.4
200 8	219.1 8.625	259 10.19	336 13.22	152 6.00	4 - 5/8 X 3 1/4	11.3 24.9

\*Working pressure and End Load are total, from all internal and external loads, based on proper coupling assembly with bolts pads metal-to-metal, on Aquamine PVC pipe. Couplings are designed to be used with plain end pipe.

Metric thread size bolts (plated) are available (color coded) for all coupling sizes upon request. Contact Aquamine for details.

WARNING: Piping systems must always be depressurized and drained before attempting disassembly and removal of any Aquamine piping products.

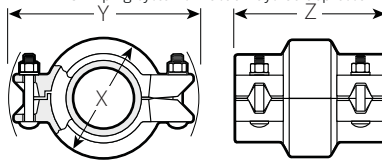

## Aquamine Plain-End PVC to Grooved Transition Coupling


### Style 2972

For Complete Information, Request Publication 50.01.



- Provides bolted, mechanical assembly for plain-end steel pipes, valves and fittings
- Join shorter sections of PVC pipe without having to use special adaptors
- Available in sizes 2-8"/50-200mm

Size		Dimensions millimeters/Inches			Bolt Data	
Nominal Size mm Inches	Actual Outside Diameter mm Inches	X	Y	Z	Quantity	Size Inches
50 2	60.3 2.375	84 3.31	133 5.22	71 2.78	2	3/8 X 2
80 3	88.9 3.500	111 4.38	178 6.99	81 3.20	4	1/2 X 2 1/4
100 4	114.3 4.500	144 5.68	210 8.25	99 3.90	4	1/2 X 2 1/4
150 6	168.3 6.625	199 7.84	286 11.25	102 4.00	4	3/8 X 3 1/4
200 8	219.1 8.625	259 10.18	355 13.96	106 4.16	4	3/8 X 3 1/2

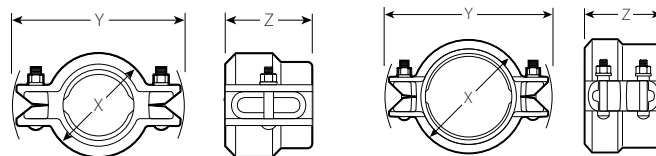


# Aquamine Reusable PVC Products

## Aquamine Plain-End PVC to HDPE Transition Coupling


### Style 2971

For Complete Information, Request Publication 50.01.



- No solvent or cure times
- Provides bolted, mechanical assembly of plain-end PVC pipe to plain-end HDPE pipe without special adaptors.
- Available in sizes 2-8"/50-200mm

Size		Dimensions millimeters/Inches			Bolt/Nut No. - Size Inches	Weight kg Lbs.
Nominal Size mm Inches	Press. Rating Kpa/psi	X	Y	Z		
50 2	60.3 2.375	92 3.64	151 5.94	92 3.62	2-1/2 x 2-1/2	1.6 3.5
80 3	88.9 3.500	116 4.58	177 6.95	116 4.56	4-1/2 x 2-1/4	3.5 7.7
100 4	114.3 4.500	149 5.88	205 8.09	147 5.78	4-1/2 x 2-1/4	5.3 11.6
150 6	168.3 6.625	203 8.00	275 10.84	149 5.88	4-3/8 x 3-1/4	7.4 16.4
200 8	219.1 8.625	259 10.19	336 13.22	152 6.00	4-3/8 x 3-1/4	11.3 24.9



(2"/50 mm size has one bolt per side.)





# Gaskets


Victaulic gaskets are designed to provide life-of-the-system service in a wide variety of applications. Gasket materials are available to meet most piping applications. For a list of service recommendations by gasket type see pg. 14-5.

For Complete Information request publication **05.01**.




## Gasket Styles


ILLUSTRATIONS EXAGGERATED FOR CLARITY




Standard




Reducing



Vic-Flange




FlushSeal




Grooved Copper Tubing with FlushSeal Gasket




Advanced Groove System (AGS)



EndSeal



Outlet



Mechanical-T



Plain End



Plain End Piping System for HDPE Pipe



Pressfit Piping System for Stainless Steel

# Gaskets

## Gasket Materials

When Victaulic couplings were first developed, natural rubber compounds were used. As elastomer technology advanced, superior gasket materials became available and were added to the Victaulic line. This allows Victaulic to presently offer a variety of synthetic rubber gaskets to provide the option of selecting Victaulic products for the widest variety of applications. For most water applications the Victaulic Grade “E” EPDM (ethylene propylene diene monomer) gasket compound is recommended. Victaulic Grade “E” material has premium performance properties with respect to aging and resistance to heat and hot water. Heat aging tests at +121°C/+250°F conducted on this material show essentially no change in physical properties. This situation is further enhanced when this rubber is subjected to an essentially non-oxidative environment such as a gasket in a water piping system. For example, aging tests in a nonoxidative atmosphere show essentially no change in physical properties of this material even when tested at temperatures up to +177°C/+350°F.

Since water has no deteriorating effect on the elastomer, temperature is the only limiting factor to be considered in determining the life expectancy of the elastomer in water service. The superior performance of the Grade “E” elastomer permits its use for hot water service up to +110°C/+230°F. The Grade “E” gasket is superior to previous gasket materials by all performance barometers, including high and low temperature limits, tensile strength, chemical resistance and shelf life.

## Gasket/O-ring Data

To assure the maximum life for the service intended, proper gasket selection and specification in ordering is essential. Many factors must be considered in determining the optimum gasket/o-ring for a specific service. The foremost consideration is temperature, along with concentration of product, duration of service and continuity of service. Temperatures beyond the recommended limits have a degrading effect on the polymer. Therefore, there is a direct relationship between temperature, continuity of service and gasket life.

Services listed are General Service Recommendations only. It should be noted that there are services for which these gaskets/o-rings are not recommended. Reference should always be made to the latest Victaulic Gasket Selection Guide (publication 05.01) for specific service recommendations and for a listing of services which are not recommended.

Gasket recommendations apply only to Victaulic gaskets and o-rings. Recommendations for a particular service do not necessarily imply compatibility of the coupling housing, related fittings or other components for the same service.

These recommendations do not apply to rubber-lined or rubber seal valves or other rubber-lined products. Refer to Valve Materials Selection in Section 08.02 or contact Victaulic for recommendations.

Victaulic gaskets are clearly marked as part of the mold with the gasket size, style and compound for easy identification.

## PRODUCTS

- 1-1 Couplings
- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products

## 16-1 Gaskets


- 17-1 Pipe Preparation Tools
- 18-1 Product Index
- 19-1 Piping Software

# Gaskets


## Gasket Performance



UNIQUE C-SHAPED GASKET  
FORMS A TRIPLE SEAL



SEALS BETWEEN THE PIPE ENDS  
AND THE GROOVE



SURROUNDED, REINFORCED AND  
SLIGHTLY COMPRESSED BY THE HOUSING



SEAL IS ENHANCED BY PRESSURE  
OR VACUUM IN THE LINE

The sealing efficiency of Victaulic gaskets is such that the gasket forms an initial seal as it is stretched over the pipe ends. Upon placement of the housing around the gasket and into the grooves, the gasket is positioned. As the housing segments are tightened, the resilient elastomeric gasket conforms to the internal cavity of the housing and is further compressed, enhancing the gasket's seal against the pipe. The Victaulic gasket is pressure responsive.

The combination of these characteristics creates a permanent, leak-tight triple seal on a variety of piping materials including carbon steel, stainless steel, aluminum, PVC and copper. Line pressure serves to strengthen the seal through the combination of normal gasket resilience, housing reinforcement and the action of pressure downward on the lips.

**Vacuum Service** – The Victaulic gasket design seals equally well under pressure or vacuum. Vacuum creates a pressure differential between the inside and outside of the piping system. The resulting increased force from the external pressure has the same seal enhancement effect as internal pressure. For continuous vacuum service greater than 254 mm/10" of mercury, we recommend the use of molded Victaulic FlushSeal gaskets or Victaulic standard gaskets with a metal ring liner, both available from your Victaulic distributor. The FlushSeal feature and the metal liner both prevent distortion of the gasket due to the pulling action of a high vacuum at the center of the gasket. Either molded FlushSeal gaskets or gaskets with metal liners are recommended on strong vacuums and are suitable for applications wherein vacuum conditions are anticipated to a maximum value of 760 mm/29.9" of mercury.

**ANSI/NSF 61 and Australia Watermark Standards** – ANSI/NSF 61 and Australia Watermark are National Standards that were developed to establish minimum requirements for the control of potential adverse human health effects from products which contact drinking water. Their primary focus is on contaminants or impurities which may be imparted indirectly to drinking water. Materials that do not come in direct contact with the potable water do not require evaluation. The classification categories for pipe and related products and joining and sealing materials, as established by ANSI/NSF 61/Australia Watermark are "cold", which is limited to +30°C/+86°F maximum and "hot" which is limited to +82°C/+180°F maximum. These categories were established by the maximum ambient distribution temperature of unheated water for "cold" and a temperature well in excess of a scalding temperature for "hot" domestic water. The following list represents the current classifications on our products:

**EPDM "E" Gaskets:** UL classified in accordance with ANSI/NSF 61/Australia Watermark for cold +30°C/+86°F and hot +82°C/+180°F potable water service.

**Halogenated Butyl "M" Gaskets:** UL classified in accordance with ANSI/NSF 61/Australia Watermark for cold +30°C/+86°F potable water service.

**PPS Coating:** The PPS (Polyphenylene Sulfide blend) coating applied to our Vic-300 AGS butterfly valves is UL classified in accordance with ANSI/NSF 61/Australia Watermark for cold +30°C/+180°F and hot +82°C/+180°F potable water service.

# Gaskets

## Gasket Performance

### **Vic-Press 304 and Vic-Press 316 Couplings and Fittings:**

UL classified in accordance with ANSI/NSF 61/Australia Watermark for cold +30°C/+86°F and hot +82°C/+180°F potable water service with “E”, “T” or “O” o-rings.

**Vic-Press 304 and Vic-Press 316 Pipe:** UL classified in accordance with ANSI/NSF 61/Australia Watermark for cold +30°C/+86°F and hot +82°C/+180° potable water service.

For more details about Victaulic gasket construction and testing, request publication 05.01.

## Gasket Lubricant



Thorough lubrication of the gasket exterior including the lips and/or pipe ends and housing interiors, is essential to prevent pinching the gasket. Lubrication assists proper gasket installation. Use Victaulic Lubricant for installation. Other compatible material, such as silicone and others may be used on Grades “E” or “L” gaskets. Lubricant is available in 125grams/4.5oz. tubes. Victaulic Lubricant is also available in 900grams/32oz. containers.

**Important Note:** Victaulic Lubricant is not recommended for use with high-density polyethylene (HDPE) pipe.

### **ALWAYS USE LUBRICANT FOR PROPER COUPLING ASSEMBLY.**

Size Nominal Size mm Inches	Number of Gaskets	
	Per Tube	Per Liter
50 2	55	400
80 3	36	270
100 4	26	200
150 6	17	125
200 8	13	100
250 10	11	80
300 12	8	60
350 14	7	50
400 16	6	45
450 18	5	35
500 20	4	30
600 24	3	20

# Gaskets

## Gasket Selection Guide



### WARNING

To assure maximum life for the service intended, proper gasket selection and specification in ordering is essential. Failure to select the proper rubber compound may result in personal injury or property damage, improper installation, joint leakage or joint failure.

## Standard Gaskets

Grade	Temperature Range	Compound	Color Code	General Service Recommendations *
<b>E</b>	-30°F to 230°F -34°C to +110°C	EPDM	Green Stripe	Recommended for hot water service within the specified temperature range plus a variety of dilute acids, oil-free air and many chemical services. UL classified in accordance with ANSI/NSF 61 for cold +86°F/+30°C and hot +180°F/+82°C potable water service. <b>NOT RECOMMENDED FOR PETROLEUM SERVICES.</b>
<b>T</b>	-20°F to +180°F -29°C to +82°C	Nitrile	Orange Stripe	Recommended for petroleum products, hydrocarbons, air with oil vapors, vegetable and mineral oils within the specified temperature range; not recommended for hot dry air over +140°F/+60°C and water over +150°F/+66°C. <b>NOT RECOMMENDED FOR HOT WATER SERVICES.</b>
<b>E<sup>+</sup></b> (Type A)	Ambient	EPDM	Violet Stripe	Applicable for wet and dry (oil-free air) sprinkler services only. For dry services, Victaulic continues to recommend the use of FlushSeal® gaskets. <b>NOT RECOMMENDED FOR HOT WATER SERVICES.</b>

† Vic-Plus pre-lubricated gasket.

\* For specific chemical and temperature compatibility, refer to the Gasket Selection and Chemical Services sections. The information shown defines general ranges for all compatible fluids.

## Special Gaskets

Grade	Temperature Range	Compound	Color Code	General Service Recommendations *
<b>M2</b>	-40°F to +160°F -40°C to +71°C	Epichlorohydrin	White Stripe	Specially compounded to provide superior service for common aromatic fuels at low temperatures. Also suitable for certain ambient temperature water services.
<b>V</b>	-30°F to +180°F -34°C to +82°C	Neoprene	Yellow Stripe	Recommended for hot lubricating oils and certain chemicals. Good oxidation resistance. Will not support combustion.
<b>O</b>	+20°F to +300°F -7°C to +149°C	Fluoroelastomer	Blue Stripe	Recommended for many oxidizing acids, petroleum oils, halogenated hydrocarbons, lubricants, hydraulic fluids, organic liquids and air with hydrocarbons to +300°F/+149°C. <b>NOT RECOMMENDED FOR HOT WATER SERVICES.</b>
<b>L</b>	-30°F to +350°F -34°C to +177°C	Silicone	Red Gasket	Recommended for dry heat, air without hydrocarbons to +350°F/+177°C and certain chemical services.
<b>A</b>	+20°F to +180°F -7°C to +82°C	White Nitrile	White Gasket	No carbon black content. May be used for food. Meets FDA requirements. Conforms to CFR Title 21 Part 177.2600. Not recommended for hot water services over +150°F/+66°C or for hot, dry air over +140°F/+60°C. <b>NOT RECOMMENDED FOR HOT WATER SERVICES.</b>
<b>T</b> EndSeal	-20°F to +150°F -29°C to +66°C	Nitrile	No External Identification	Specially compounded with excellent oil resistance and a high modulus for resistance to extrusion. Temperature range -20°F/-29°C to +150°F/+66°C. Recommended for petroleum products, air with oil vapors, vegetable and mineral oils within the specified temperature range. <b>Not recommended for hot water services over +150°F/+66°C or for hot, dry air over +140°F/+60°C.</b> For maximum gasket life under pressure extremes, temperature should be limited to +120°F/+49°C.
<b>EG</b>	-30°F to +230°F -34°C to +110°C	EPDM	Double Green Stripes	Recommended for hot water service within the specified temperature range plus a variety of dilute acids, oil-free air and many chemical services. DVGW, KTW, ÖVGW, and SVGW approved for W534, EN681-1 Type WA cold potable water service up to +122°F/+50°C. <b>NOT RECOMMENDED FOR PETROLEUM SERVICES</b>
<b>EF</b>	-30°F to +104°F -34°C to +40°C	EPDM	Green "X"	Recommended for potable water service within the specified temperature range plus a variety of dilute acids, oil-free air and many chemical services. French ACS (Crecep) approved for EN681-1 Type WA cold potable water service. <b>NOT RECOMMENDED FOR PETROLEUM SERVICES</b>
<b>EW</b>	-30°F to +203°F -34°C to +110°C	EPDM	Green "W"	Recommended for hot water service within the specified temperature range plus a variety of dilute acids, oil-free air and many chemical services. WRAS- approved material to BS 6920 for cold and hot potable water service up to +149°F /+65°C <b>NOT RECOMMENDED FOR PETROLEUM SERVICES</b>

For services not listed contact Victaulic for recommendations.

\* Gasket recommendations apply only to Victaulic gaskets. Recommendation for a particular service does not necessarily imply compatibility of the coupling housing, related fittings or other components for the same service. These recommendations do not apply to rubber lined valves.

# Gaskets

## Gasket Selection

Chemical compositions are listed in alphabetical order. Unless otherwise noted, temperatures are ambient. For chemicals or combinations not listed contact Victaulic for recommendations. DO NOT ASSUME THAT A SERVICE SIMILAR TO THE ONE LISTED CAN BE ACCOMMODATED WITH THE SAME GASKET.

The data and recommendations presented are based upon the best information available resulting from our field experience and laboratory testing by our own Engineering Department. In addition, we have incorporated the recommendations supplied by prime producers of basic copolymer materials and information furnished by leading molders of rubber products.

The information presented in this guide is general in scope and should be used only with this full knowledge and understanding. In unusual, critical or severe services, full information should be referred to Victaulic.

Where possible, materials should be subjected to simulated service conditions to determine their suitability for the service intended. Furthermore, it should not be concluded that, in instances where a gasket is not affected by several substances used alone, their combination will have no reaction on the gasket. Caution should be exercised with explosive, inflammable or toxic fluids. All gasket recommendations are based on pressure and temperature limitations published by Victaulic. Borderline services always should be verified by Victaulic.

Where two gaskets are shown under Gasket Grade, both are acceptable under normal conditions for the service listed.

Rating Code Key	
<b>G</b>	<b>Good</b>
<b>C</b>	<b>Conditional</b> (Submit analysis of materials to Victaulic for positive recommendations)
<b>NR</b>	<b>Not Recommended</b> (See pg. 14-8 for complete listing)

**FOR SERVICES NOT LISTED CONTACT VICTAULIC FOR RECOMMENDATIONS.**

Gasket recommendations apply only to Victaulic gaskets. Recommendation for a particular service does not necessarily imply compatibility of the coupling housing, related fittings or other components for the same service. These recommendations do not apply to rubber lined valves.





# Gaskets

Chemical Composition	Rating Code	Gasket Grade
Methyl Cyclopentane	C	V
Methyl Ethyl Ketone	C	E/EHP
Methyl Isobutyl Carbinol	G	E/EHP
Methyl Isobutyl Ketone	NR	—
Methylene Chloride	C	O
Methylene Dichloride 100°F/38°C	G	O
MIL-L7808	G	O
MIL-05606	G	O
MIL-08515	G	O
Milk	G	A
Mineral Oils	G	T
Naptha, 160°F/71°C	G	O
Napthalene	NR	—
Napthenic Acid	C	T
Natural Gas	C	T
Nevoil	G	E/EHP
Nickel Acetate to 10%, 100°F/38°C	G	V
Nickel Ammonium Sulfate	G	V
Nickel Chloride	G	E/T/EHP
Nickel Nitrate	G	V
Nickel Plating Solution 125°F/52°C	G	E/EHP
Nickel Sulfate	G	E/T/EHP
Nicotine	C	V
Nicotine Acid	C	V
Nitric Acid to 10%, 75°F/24°C	G	E/EHP
Nitric Acid, 10-50%, 75°F/24°C	G	O
Nitric Acid, 50-86%, 75°F/24°C	C	O
Nitric Acid, Red Fuming	C	O
Nitrocellulose	G	V
Nitroethane	C	E/EHP
Nitromethane	G	E/EHP
Nitrous Oxide	G	E/EHP
Octyl Alcohol	G	V
Oil, Crude Sour	G	T
Oil, Motor	G	T
Oleic Acid	G	T
Olive Oil	G	A
Oronite 8200 Silicate Ester Fluid	G	O
Orthodichlorobenzene	G	O
OS-45 Silicate Ester Fluid	G	O
OS-45-1	G	O
Oxalic Acid	G	E/EHP
Oxygen, Cold †	C	E/EHP
Ozone (100 ppm)	G	E/EHP
Palmitic Acid	G	T
Peanut Oil	G	A
Pentane	G	T
Perchloroethylene	G	O
Perchloric Acid	NR	—
Petroleum Ether (See Benzene)	G	O
Petroleum Oils	G	T
Phenol (Carbolic Acid)	G	O
Phenylhydrazine	C	E/EHP
Phenylhydrazine Hydrochloride	C	E/EHP
Phosphate Ester	G	E/EHP
Phosphoric Acid, to 50%, 70°F/21°C	G	E/EHP
Phosphoric Acid, to 85%, 200°F/93°C	G	O
Photographic Solutions	G	T
Phthalic Anhydride	G	E/EHP
Picric Acid, Molten	G	V
Plating Solutions (gold, brass, cadmium, copper, lead, silver, nickel, tin, zinc)	G	V
Polybutene	G	T
Polyvinyl Acetate, Solid (In Liquid State is 50% solution of Methanol or 60% solution of H2O)	G	E/EHP
Potassium Alum	G	E/T/EHP
Potassium Bicarbonate	G	E/T/EHP
Potassium Bichromate	G	T/E
Potassium Borate	G	E/EHP
Potassium Bromate	G	E/EHP
Potassium Bromide	G	E/T/EHP
Potassium Carbonate	G	E/T/EHP
Potassium Chlorate	G	E/EHP
Potassium Chloride	G	T
Potassium Chromate	G	T
Potassium Cyanide	G	E/T/EHP
Potassium Dichromate	G	E/EHP
Potassium Ferricyanide	G	E/EHP

Chemical Composition	Rating Code	Gasket Grade
Potassium Ferrocyanide	G	E/EHP
Potassium Fluoride	G	E/EHP
Potassium Hydroxide	G	T
Potassium Iodide	G	V
Potassium Nitrate	G	T
Potassium Perborate	G	E/EHP
Potassium Perchlorate	G	T
Potassium Permanganate, Saturated to 10%	G	E/EHP
Potassium Permanganate, Saturate 10-25%	G	E/EHP
Potassium Persulfate	G	T
Potassium Phosphate	G	V
Potassium Silicate	G	V/E/T/EHP
Potassium Sulfate	G	T
Potassium Thiosulfate	G	V
Prestone	G	T
Propane Gas	C	T
Propanol	G	E/EHP
Propargyl Alcohol	G	E/EHP
Propyl Acetate	C	V
Propyl Alcohol	G	T
Propylene Dichloride	C	L
Propylene Glycol	G	E/EHP
Pydraul F - 9 and 150	NR	—
Pyranol 1467	G	T
Pyranol 1476	G	T
Pyroguard "C"	G	T
Pyroguard "D"	G	T
Pyroguard 55	G	E/EHP
Pyrrrole	G	E/EHP
Rapeseed Oil	G	A
Ref. Fuel (70 ISO Octane, 30 Toluene)	G	T
Rosin Oil	G	V/T
Salicylic Acid	G	E/EHP
Secondary Butyl Alcohol	G	T
Sewage	G	E/T/EHP
Silver Cyanide	C	V
Silver Nitrate	G	E/EHP
Silver Plating Solution	C	V
Silver Sulfate	G	E/EHP
Skydrol, 200°F/93°C	G	L
Skydrol 500 Phosphate Ester	C	E/EHP
Soap Solutions	G	E/T/EHP
Soda Ash, Sodium Carbonate	G	E/T/EHP
Sodium Acetate	G	E/EHP
Sodium Alum	G	T
Sodium Benzoate	G	E/T/EHP
Sodium Bicarbonate	G	E/T/EHP
Sodium Bisulfate	G	E/T/EHP
Sodium Bisulfite (Black Liquor)	G	E/T/EHP
Sodium Bromide	G	E/T/EHP
Sodium Carbonate	G	E/T/EHP
Sodium Chlorate	G	E/EHP
Sodium Chloride	G	E/T/EHP
Sodium Cyanide	G	E/T/EHP
Sodium Dichromate, to 20%	G	E/T/EHP
Sodium Ferricyanide	G	E/T/EHP
Sodium Ferrocyanide	G	E/T/EHP
Sodium Fluoride	G	E/T/EHP
Sodium Hydro Sulfide	G	T
Sodium Hydroxide to 50%	G	E/EHP
Sodium Hypochlorite, to 20%	G	E/EHP
Sodium Metaphosphate	G	T
Sodium Nitrate	G	E/EHP
Sodium Nitrite	G	E/T/EHP
Sodium Perborate	G	E/EHP
Sodium Peroxide	G	E/EHP
Sodium Phosphate, Dibasic	G	T
Sodium Phosphate, Monobasic	G	T
Sodium Phosphate, Tribasic	G	T
Sodium Silicate	G	T
Sodium Sulfate	G	E/T/EHP
Sodium Sulfide	G	T
Sodium Sulfite Solution, to 20%	G	T
Sodium Thiosulfate, "Hypo"	G	T
Sohovis 47	G	T
Sohovis 78	G	T
Solvasol #1	G	T

Chemical Composition	Rating Code	Gasket Grade
Solvasol #2	G	T
Solvasol #3	G	T
Solvasol #73	C	T
Solvasol #74	NR	—
Soybean Oil	G	A
Spindle Oil	G	T
Stannic Chloride	G	T
Stannous Chyroride, to 15%	G	T
Starch	G	T
Steam	NR	—
Stearic Acid	G	T
Stoddard Solvent	G	T
Styrene	G	O
Sucrose Solutions	G	A
Sulfonic Acid	G	E/EHP
Sulphite Acid Liquor	G	E/EHP
Sulfur	G	V/E
Sulfur Chloride	G	O
Sulfur Dioxide, Dry	C	E/T/EHP
Sulfur Dioxide, Liquid	G	E/EHP
Sulfur Trioxide, Dry	G	O
Sulfuric Acid, to 25%, 150°F/66°C	G	E/EHP
Sulfuric Acid, 25-50%, 200°F/93°C	G	O
Sulfuric Acid, 50-95%, 150°F/66°C	G	O
Sulfuric Acid, Fuming	C	O
Sulfuric Acid, Oleum	C	O
Sulfurous Acid	G	O
Tall Oil	C	T
Tannic Acid, All Conc.	G	V
Tanning Liquors (50 g. alum. solution, 50 g. dichromate solution)	G	T
Tartaric Acid	G	E/EHP
Terpineol	G	V
Tertiary Butyl Alcohol	G	V/E/T/EHP
Tetrabutyl Titanate	G	E/EHP
Tetrachloroethylene	G	O
Tetrahydrofuran	NR	—
Tetralin	NR	—
Thionyl Chloride	C	T
Terpineol	C	T
Thiophene	NR	—
Titanium Tetrachloride	G	O
Toluene, 30%	G	T
Transmission Fluid, Type A	G	O
Triacetin	G	T
Trichloroethane	G	O
Trichloroethylene, to 200°F/93°C	G	O
Tricresyl Phosphate	G	E/EHP
Triethanolamine	G	E/T/EHP
Trisodium Phosphate	G	E/EHP
Tung Oil	G	T
Turbo Oil #15 Diester Lubricant	G	O
Turpentine	C	T
Urea	G	T
Vegetable Oils	G	A
Vinegar	G	A
Vinyl Acetate	G	E/EHP
Vi-Pex	G	T
Water, to 150°F/66°C	G	E/T/M/S
Water, to 200°F/93°C	G	E/M
Water, to 230°F/110°C	G	E/EHP
Water, Acid Mine	G	E/T/EHP
Water, Bromine	G	V
Water, Chlorine	C	E/M
Water, Deionized	G	E/M
Water, Seawater	G	E/EHP
Water, Waste	G	E/T/M/S
Whiskey	G	A
White Liquor	G	E/EHP
Wood Oil	G	T
Xylene	C	O
Zinc Chloride, to 50%	G	E/EHP
Zinc Nitrate	G	E/EHP
Zinc Sulfate	G	E/T/EHP

Rating Code	Rating Code Key
G	Good
C	Conditional
NR	Not Recommended

## Services Not Recommended

The services listed below have been tested and are NOT RECOMMENDED with any of the presently available gasket materials. Services not shown as recommended or not recommended should be submitted to Victaulic for specific recommendations.

Chemical Composition	Rating Code
Acrylonitrile	NR
Allyl Chloride	NR
Amyl Chloride	NR
Antraquinone	NR
Antraquinone Sulfonic Acid	NR
Arylsulfonic Acid	NR
Butyne Diol	NR
Chloralhydrate	NR
Chlorobromomethane	NR
Chlorosulphonic Acid	NR
Ethylene Oxide	NR
Fluorine Gas Wet	NR
Freon 21	NR
Furan	NR
Gallic Acid	NR
Hydrogen Phosphide	NR
Lauryl Chloride	NR
Methyl Isobutyl Ketone	NR
Napthalene	NR
Perchloric Acid	NR
Pydraul F - 9 and F - 150	NR
Solvasol #74	NR
Steam	NR
Tetra Hydrofuran	NR
Tetralin	NR
Thiophene	NR

## Water and Air Services

	Rating Code	Gasket Grade
Air, Temp. -30°F to +230°F / -34°C to +110°C (no oil vapors)	G	E
Dry Air, Temp. +230°F to +350°F / +110°C to +177°C (no oil or water vapors)	G	L
Air, Oil Vapor, Temp. 0°F to +150°F / -18°C to 66°C	G	T
Air, Oil Vapor, Temp. +150°F to +300°F / +66°C to +149°C	G	O
Water, Temp. to +150°F / +66°C	G	E/T/M/S
Water, Temp. to +200°F / +93°C	G	E/M
Water, Temp. to +230°F / +110°C*	G	E
Water, Temp. to +250°F / +120°C	G	EHP
Water, Acid Mine	G	E/T
Water, Bromine	G	V
Water, Chlorine	C	E/M
Water, Deionized	G	E/M
Water, Seawater	G	E/EHP
Water, Waste	G	E/T/M/S
Whiskey	G	A
White Liquor	G	E/EHP
Wood Oil	G	T
Xylene	C	O
Zinc Chloride, to 50%	G	E/EHP
Zinc Nitrate	G	E/EHP
Zinc Sulfate	G	E/T/EHP

\* Recommended for water only. Not recommended for steam service, except where couplings are accessible for frequent gasket replacement.


NOTE: The Grade "EHP" gasket can be used on all chemical, water and air services suitable for Grade "E" gaskets.

# Pipe Preparation


## Roll Groove



Roll groove shown on Schedule 40 steel pipe. The small dimple created on interior pipe wall does not significantly hinder pressure or flow.



Vic-Easy tools cold form groove into pipe – maintains dimensions



Roll grooving removes no metal from pipe


## Cut Groove



Cut groove shown on Schedule 80 carbon pipe. The groove created removes less metal than threading.



Cut groove removes less metal than threading



Vic-Adjustable tools provide proper groove dimensions

## Roll Groovers

### Field Portable

VE12, PG. 17-3  
VE26, PG. 17-3  
VE46, PG. 17-3  
VE226, PG. 17-3



### Field Fabrication

VE271FSD, PG. 17-4  
VE273SFS, PG. 17-4  
VE417FSD, PG. 17-4  
VE107, PG. 17-4



### Plant/Shop Fabrication

VE268, PG. 17-5  
VE414MC, PG. 17-5  
VE460, PG. 17-5



## Pressfit Tools

PFT505, PG. 17-11  
PFT509, PG. 17-11

See pg. 9-1 for the complete line of Pressfit products.




- Fast, clean and easy method for joining Schedule 5 Type 304/316 stainless steel pipe
- Available for wide variety of services based on o-ring capabilities
- Meets hanging requirements of ASME B31.1, B31.3 and B31.9
- Only approved Pressfit 304/316 pipe should be used with Pressfit 304/316 stainless steel products
- Electronically or battery operated hand-held pressing tool

## Cut Groovers

### Field Manual

VG28GD, PG. 17-9  
VG824, PG. 17-9



### Field Groover

VIC-GROOVER, PG. 17-9



### Plastic Groovers

VPG26, PG. 17-10  
VPG824, PG. 17-10



AVAILABLE IN AUSTRALIA  
AND NEW ZEALAND ONLY

# Pipe Preparation

## Cutting Tools


### Hole Cutting

HCT908, PG. 17-11  
 VHCT900, PG. 17-11  
 VIC-TAP® II, PG. 17-11



### Pipe Cutting

VCT1, PG. 17-12  
 VCT2, PG. 17-12



## Pipe Coatings

To maintain the published performance levels with respect to maximum rated working pressure and end load, the maximum coating thickness on our couplings should not exceed 10 mils/0.010". If additional protection is required, the coating thickness may be increased on the external surfaces of the coupling key, shoulder, gasket pocket or bolt pad mating surfaces. In addition, the coating thickness on the pipe ends should not exceed 10 mils. Specifically, the gasket seating surface and the entire groove should have coating thickness limited to 10 mils.

Exceeding the maximum thickness on either the pipe end or coupling surfaces mentioned above will decrease the performance capabilities of the pipe joints.

## Accessories

### Power Drive

VPD753, PG. 17-13



### Power Mule

PG. 17-13



### Adjustable Pipe Stands

VAPS112, PG. 17-13  
 VAPS224, PG. 17-14  
 VAPS1627, PG. 17-14



### Speed Reduction Control (LSCR)

PG. 17-14



### Pipe Diameter Tape

PG. 17-14



## PRODUCTS

- 1-1 Couplings
- 2-1 Fittings
- 3-1 Valves
- 4-1 Accessories
- 5-1 Advanced Groove System
- 6-1 Hole Cut Piping System
- 7-1 Plain End Piping System
- 8-1 Grooved System for Stainless Steel Pipe
- 9-1 Pressfit System for Stainless Steel Pipe
- 10-1 Plain End Piping System for HDPE Pipe
- 11-1 Grooved Copper
- 12-1 Grooved System For Aluminium Pipe
- 13-1 Depend-O-Lok® System
- 14-1 Vic-Ring System
- 15-1 Aquamine® Reusable PVC Products
- 16-1 Gaskets
- 17-1 Pipe Preparation Tools**
- 18-1 Product Index
- 19-1 Piping Software

# Pipe Preparation – Roll Grooving Tools

## Field Portable

For Complete Information  
Request Publication **24.01**



VE12

### VE12 GROOVE IN-PLACE

- For manual grooving of Schedule 5, 10 and 40 steel; stainless steel; aluminum and PVC pipe
- Enhanced tracking rolls allow bi-directional grooving
- Roll grooves 20–50mm/¾–2" pipe<sup>†</sup>

**Power Requirements:** None

**Weight:** 8 kg/17 lbs.

<sup>†</sup> Refer to Roll Grooving Tool Ratings chart on pgs. 17-6, 17-7



VE26

### VE26 GROOVE IN-PLACE

- Repair and retrofit existing lightwall steel, Schedule 40 steel, stainless steel, PVC, and aluminum
- Patented enhanced tracking rolls allow bi-directional grooving
- Model VE26C handles copper tubing (CTS) Types K, L, M and DWV plus British, DIN, and Australian Standard copper
- Model VE26SS grooves Schedule 5 and 10 stainless steel
- Optional power drive adapter kit available to alternately groove pipe using a Ridgid\* 300 power drive or VPD753
- Roll grooves 50–150mm/2–6" pipe<sup>†</sup>

**Power Requirements:** None

**Weight:** 10 kg/22 lbs.

<sup>†</sup> Refer to Roll Grooving Tool Ratings chart on pgs. 17-6, 17-7



VE46

### VE46 GROOVE IN-PLACE

- Designed for manually roll grooving Schedule 40 steel, aluminum, stainless steel and PVC pipe and Schedule 80 PVC pipe
- Patented enhanced tracking rolls allow bi-directional grooving and reduce pipe "walk-off"
- Optional power drive adapter kit available to alternately groove pipe using a Ridgid\* 300 power drive or VPD753
- Roll grooves 90–150mm/3½–6" pipe<sup>†</sup>

**Power Requirements:** None

**Weight:** 13 kg/28 lbs.

<sup>†</sup> Refer to Roll Grooving Tool Ratings chart on pgs. 17-6, 17-7



VE226

### VE226 PORTABLE GROOVER

- Mounts to a Victaulic VPD752 or Ridgid\* 300 power drive
- Optional alternate bases available
- Tool is operated using a standard 9.5 mm/¾" square ratchet drive (not included)
- Available in six models for steel, copper tubing, stainless steel, aluminum and PVC pipe
- Roll grooves 20–150mm/¾–6" pipe<sup>†</sup>

**Drive Requirements:** Fits Victaulic VPD753 or Ridgid 300 power drives. Optional bases for Ridgid 535, 1224, 1822, and Oster 310 available. Contact Victaulic for others.

**Weight:** 17 kg/37 lbs.

<sup>†</sup> Refer to Roll Grooving Tool Ratings chart on pgs. 17-6, 17-7

\* Ridgid is a registered trademark of the Ridge Tool Company

### VE26/46 Power Drive Kit



The VE26/46 power drive kit is available to allow both tools to be directly mounted to either a Victaulic VPD753 or Ridgid\* 300 Power Drive.

# Pipe Preparation – Roll Grooving Tools

## Field Fabrication

For Complete Information  
Request Publication 24.01



VE107

### VE107 GROOVE-N-GO

- Mobile light-duty roll grooving tool with an integral motor/drive unit mounted to portable hand truck
- 9.5 mm<sup>3</sup>/<sub>8</sub>" square ratchet drive for operation (standard)
- Patented enhanced tracking rolls reduce pipe "walk-off"
- Completely self-contained unit with an integral motor, safety foot switch and power plug
- Roll grooves 32–150 mm/1¼–6" pipe<sup>†</sup>

**Power Requirements:** 220volt, 8amp (110volt, 15amp model available.)

**Weight:** 64 kg/140 lbs.

**Optional Accessories:** Additional rolls/shafts are available for copper, lightwall stainless steel, and EndSeal (ES) grooving.

<sup>†</sup> Refer to Roll Grooving Tool Ratings chart on pgs. 17-6, 17-7



VE271FSD

### VE271FSD

- Completely self-contained unit with integral gear motor, safety guards, safety foot switch and power cord/plug
- Equipped with a unique pivot arm design, making roll changing quick and easy, without removing shafts
- Patented enhanced tracking rolls reduce pipe "walk-off"
- Roll grooves 20–300 mm/<sup>3</sup>/<sub>4</sub>–12" pipe<sup>†</sup>

**Drive Requirements:** Self-contained

**Weight:** 154 kg/340 lbs.

**Optional Rolls:** Carbon steel Schedules 5, 10, 20, and 40; copper rolls for type K, L, M and DWV; and stainless steel Rx rolls for Schedules 5S-10-10S.

**Optional Accessories:** An optional pipe stabilizer for 200–300 mm/8–12" pipe is available.

**Power Requirement:** 220volt, 8amp (110volt, 15amp model available.)

<sup>†</sup> Refer to Roll Grooving Tool Ratings chart on pgs. 17-6, 17-7



VE272SFS

### VE272SFS

- Portable roll groover mounts easily to the Victaulic VPD753 or Ridgid\* 300 power drive
- Hand pump operation with a unique pivot arm design reduces handle effort
- Patented enhanced tracking rolls reduce pipe "walk-off"
- Roll grooves 20–300 mm/<sup>3</sup>/<sub>4</sub>–12" pipe<sup>†</sup>

**Power Requirements:** Victaulic VPD753 or Ridgid\* 300 power drive

**Weight:** 84 kg/184 lbs.

**Optional Rolls:** Optional rolls are available for copper pipe; Schedule 5S, 10S, and 10 stainless steel pipe; and EndSeal (ES) grooving, Aluminum Schedules 5, 10, 20, 40 RP rolls, and PVC Plastic Schedule 40-80 rolls.

**Optional Accessories:** An optional pipe stabilizer 200-300mm/8-12" pipe is available and required for copper.

<sup>†</sup> Refer to Roll Grooving Tool Ratings chart on pgs. 17-6, 17-7



VE417FSD

### VE417FSD

- For field roll grooving of 50–400 mm/2–16" standard wall pipe, lightwall steel pipe, as well as aluminum, stainless and PVC plastic pipe
- Equipped with a pipe stabilizer for 150–400 mm/6–16" pipe sizes to control pipe sway
- Groove depth adjuster provides precise groove dimensions and allows for easy adjustment for initial groove diameter
- Completely self-contained units with integral gear motor, safety foot switch and power cord/plug
- Roll grooves 50–400 mm/2–16" pipe<sup>†</sup>

**Power Requirements:** 220volt, 8amp for integral gear motor (110 volt, 15 amp model available)

**Weight:** 154 kg/340 lbs.

**Optional Rolls:** Optional rolls are available for drawn copper tubing; Schedule 80 PVC pipe; stainless steel Rx Schedules 5S, 10 and 10S; and EndSeal (ES) grooving. Roll sets also available for 350–400 mm/14–16" std. wall carbon steel pipe for use with the AGS system.

<sup>†</sup> Refer to Roll Grooving Tool Ratings chart on pgs. 17-6, 17-7

# Pipe Preparation – Roll Grooving Tools

Plant/Shop  
Fabrication

For Complete Information  
Request Publication 24.01



VE268

## VE268

- Designed for fabrication shop roll grooving
- The fully-motorized, semi-automatic, electro-hydraulic tool comes complete with safety guards and safety foot switch
- Equipped with a unique pivot arm design, making roll changes quick and easy, without removing shafts
- Patented enhanced tracking rolls reduce pipe “walk-off”
- Roll grooves 20–300mm/¾–12" pipe†

**Drive Requirements:** Self-contained

**Weight:** 333kg/735lbs.

**Optional Rolls:** Optional rolls are available for carbon steel Schedules 5, 10, and 40; copper rolls for type K, L, M and DWV; and stainless steel Rx rolls for Schedules 5S, 10, and 10S.

**Optional Accessories:** An optional pipe stabilizer for 200–300mm/8–12" pipe is available.

† Refer to Roll Grooving Tool Ratings chart on pgs. 17-6, 17-7



VE414MC

## VE414MC

- Designed for fabrication shop roll grooving Schedule 5, 10, and standard wall carbon steel pipe, standard wall stainless steel pipe, Schedule 40, 80 PVC pipe, and standard wall aluminum pipe
- Unique roll design, making roll changing quick and easy, without removing main shafts
- Patented enhanced tracking rolls reduce pipe “walk-off”
- The tool comes equipped with pipe stabilizers to provide smooth grooving operation
- Roll grooves 50–400mm/2–16" pipe†

**Drive Requirements:** Self-contained

**Weight:** 333kg/735lbs.

**Optional Rolls:** Optional rolls are available for Schedule 5S and 10S stainless steel pipe, and type K, L, M and DWV copper tubing. Roll sets also available for 350–400mm/14–16" std. wall carbon steel pipe for use with the AGS system.

**Optional Accessories:** The tool can also be supplied in various voltages, contact Victaulic for details.

† Refer to Roll Grooving Tool Ratings chart on pgs. 17-6, 17-7



VE460

## VE460

- Fully-motorized, semi-automatic, hydraulic shop tool is shipped fully assembled with rolls for standard grooving (100–600mm/4–24") .500 wall maximum.
- Patented enhanced tracking rolls help to keep the pipe on the tool during the roll grooving process
- Tool ships with 100–300mm/4–12" Original Groove System Groove Rolls and 350–600mm/14–24" AGS Groove Rolls

**Drive Requirements:** Self-contained

**Power Requirements:** 220/440 volt, 3 phase, 60 Hz standard. The tool can also be supplied in various voltages, contact Victaulic for details.

**Weight:** 680kg/1500lbs.

**Optional Rolls:** Grooving kits available to accommodate grooving 26"/650mm and above.

AGS roll sets for 350–600mm/14–24" Schedule 10 through 12.7mm/.375" wall carbon steel pipe are now standard.

† Refer to Roll Grooving Tool Ratings chart on pgs. 17-6, 17-8

# Pipe Preparation – Roll Grooving

## Vic-Easy® Roll Grooving Tool Ratings

### (MAXIMUM CAPACITY)

Victaulic Vic-Easy roll grooving tools are designed to cold form grooves into the specified pipe to meet ANSI/AWWA C-606 and other standards and the groove dimensions specified in Victaulic Groove Specifications for each type of pipe.

These tools are designed for roll grooving pipe. To accomplish this function requires some dexterity and mechanical skills, as well as sound safety habits. Although this tool is manufactured for safe dependable operation, it is impossible to anticipate those combinations of circumstances which could result in an accident. The operator is cautioned to always practice "Safety First" during each phase of use, including setup and maintenance of these units.

Read and understand the Tool Operating and Maintenance Instruction Manual provided with each tool before operating or performing maintenance on tools. Become familiar with the tool's operations, applications and limitations. Be particularly aware of its specific hazards.

### IMPORTANT NOTES:

- **PVC grades** that can be grooved – PVC Type I Grade I – PVC 1120; PVC Type I Grade II – PVC 1220; PVC Type II Grade I – PVC 2116.

- **Copper/nickel pipe** – Contact Victaulic for details.

Note: Vic-Easy tools and rolls shown on this chart will produce grooves in accordance with Victaulic Roll Groove Dimension charts and to ANSI/AWWA C-606 standards.

Tool Model	Pipe Material	Pipe Size/Schedule mm/Inches																			
		20 3/4	25 1	32 1 1/4	40 1 1/2	50 2	65 2 1/2	80 3	90 3 1/2	100 4	120 4 1/2	125 5	150 6	200 8	250 10	300 12	350 14	400 16			
VE12	Steel	5, 10	5 – 40																		
	Stainless		40S only																		
	Aluminum †	5, 10	5 – 40																		
	PVC Plastic		40																		
VE26S	Steel					5 – 40		5, 10													
	Stainless					40S only															
VE26P	Aluminum †					5 – 40		5, 10													
	PVC Plastic					40															
VE26C	Copper					K, L, M, DWV Copper Rolls ‡															
VE26SS	Lt. Wall SS					5S, 10S Rx Rolls #															
VE46	Steel									5 – 40											
	Stainless									40S only											
VE46P	Aluminum †									5 – 40											
	PVC Plastic									40	40, 80										
VE226S	Steel					5 – 40		5, 10													
	Stainless					40S only															
VE226P	Aluminum †					5 – 40				5, 10											
	PVC Plastic					40, 80				40											
VE226B	Steel	5 – 40																			
	Stainless	40S only																			
	Aluminum †	5 – 40																			
	PVC Plastic	40	40, 80																		
VE226M	Steel					5 – 40		5, 10													
	Stainless					40S only															
VE226C	Copper					K, L, M, DWV Copper Rolls ‡															
VE226BSS	Lt. Wall SS	5S, 10S Rx Rolls #																			
VE226MSS	Lt. Wall SS					5S, 10S Rx Rolls #															
VE107	Steel					5 – 40 Standard Rolls §															
	Stainless					40S Standard Rolls §															
	Lt. Wall SS					5S, 10S Rx Rolls #															
	Copper					K, L, M, DWV Copper Rolls ‡															
VE272SFS	Steel	5 – 40S Standard Rolls §													5 – 20 Std.						
	Stainless	40S Standard Rolls §																			
	Lt. Wall SS	5S, 10S Rx Rolls #																			
	Aluminum †	5 – 40 RP Rolls ◊													5 – 20 RP ◊						
	PVC Plastic	40 RP Rolls ◊				40, 80 RP Rolls ◊								40 RP ◊							
	Copper					K, L, M, DWV Copper Rolls ‡															
VE271FSD	Steel	5 – 40S Standard Rolls §													5 – 20 Std.						
	Stainless	40S Standard Rolls §																			
	Lt. Wall SS	5S, 10S Rx Rolls #																			
	Aluminum †	5 – 40 RP Rolls ◊													5 – 20 RP ◊						
	PVC Plastic	40 RP Rolls ◊				40, 80 RP Rolls ◊								40 RP ◊							
	Copper					K, L, M, DWV Copper Rolls ‡															

TABLE CONTINUED ON PG. 17-7

- # Rx Rolls – "Rx" is the Victaulic part code designator for grooving roll sets specifically designed for roll grooving lightwall stainless steel pipe. † 6061-T4 or 6063-T4 alloy must be used.
- ‡ Alternate units are available for European Standard (EN) 1057 and Australian Standard Copper.
- § Standard Rolls – This is the Victaulic designation for grooving roll sets used primary for steel pipe. Also used for Schedule 40S stainless steel pipe.
- ◊ RP Rolls – "RP" is the Victaulic part code designator for grooving roll sets specifically designed for roll grooving PVC plastic pipe and aluminum pipe.

# Pipe Preparation – Roll Grooving

## Vic-Easy Roll Grooving Tool Ratings

### (MAXIMUM CAPACITY)

Victaulic Vic-Easy roll grooving tools are designed to cold form grooves into the specified pipe to meet ANSI/AWWA C-606 and other standards and the groove dimensions specified in Victaulic Groove Specifications for each type of pipe.

These tools are designed for roll grooving pipe. To accomplish this function requires some dexterity and mechanical skills, as well as sound safety habits. Although this tool is manufactured for safe dependable operation, it is impossible to anticipate those combinations of circumstances which could result in an accident. The operator is cautioned to always practice "Safety First" during each phase of use, including setup and maintenance of these units.

Read and understand the Tool Operating and Maintenance Instruction Manual provided with each tool before operating or performing maintenance on tools. Become familiar with the tool's operations, applications and limitations. Be particularly aware of its specific hazards.

### IMPORTANT NOTES:

- **PVC grades that can be grooved** – PVC Type I Grade I – PVC 1120; PVC Type I Grade II – PVC 1220; PVC Type II Grade I – PVC 2116.

- **Copper/nickel pipe** – Contact Victaulic for details.

- **Light weight stainless steel pipe** (Sch. 10S and Sch. 5S) must be grooved using stainless Rx roll sets.

Note: Vic-Easy tools and rolls shown on this chart will produce grooves in accordance with Victaulic Roll Groove Dimension charts and to ANSI/AWWA C-606 standards.

# Rx Rolls – "Rx" is the Victaulic part code designator for grooving roll sets specifically designed for roll grooving lightwall stainless steel pipe.

† 6061-T4 or 6063-T4 alloy must be used.

‡ Alternate units are available for European Standard (EN) 1057 and Australian Standard Copper.

§ Standard Rolls – This is the Victaulic designation for grooving roll sets used primary for steel pipe. Also used for Schedule 40S stainless steel pipe.

◇ RP Rolls – "RP" is the Victaulic part code designator for grooving roll sets specifically designed for roll grooving PVC plastic pipe and aluminum pipe.

○ RW Rolls – "RW" is the Victaulic part code designator for grooving roll sets specifically designed for roll grooving standard wall pipe to AGS specifications.

⊠ RWx Rolls – "RWx" is the Victaulic part code designator for grooving roll sets specifically designed for roll grooving lightwall stainless steel pipe to AGS specifications.

+ Special rolls for grooving true Sch. 10 (6.4mm/.25") are available.

Tool Model	Pipe Material	Pipe Size/Schedule mm/Inches																
		20 ¾	25 1	32 1¼	40 1½	50 2	65 2½	80 3	90 3½	100 4	120 4½	125 5	150 6	200 8	250 10	300 12	350 14	400 16
<b>TABLE CONTINUED FROM PG. 17-6</b>																		
VE417FSD Original Groove	Steel																	5 – 40S Standard Rolls §
	Stainless																	40S Standard Rolls §
	Lt. Wall SS																	5S, 10S Rx Rolls #
	Aluminum †																	5 – 40 RP Rolls ◇
	PVC Plastic																	40, 80 RP Rolls ◇
	Copper																	K, L, M, DWV Copper Rolls ‡
VE417FSD AGS Groove	Steel																	Std. Wall RW Rolls ø
	Stainless																	Std. Wall RW Rolls ø
	Lt. Wall SS																	5S-10 RWx Rolls ⊕+
VE268	Steel																	5 – 40S Standard Rolls §
	Stainless																	5 – 40S Standard Rolls §
	Lt. Wall SS																	5S, 10S Rx Rolls #
	Aluminum †																	5 – 40 RP Rolls ◇
	PVC Plastic																	40 RP Rolls ◇
	Copper																	40, 80 RP Rolls ◇
VE414MC Original Groove	Steel																	5 – 40S Standard Rolls §
	Stainless																	40S Standard Rolls §
	Lt. Wall SS																	5S, 10S Rx Rolls #
	Aluminum †																	5 – 40 RP Rolls ◇
	PVC Plastic																	40, 80 RP Rolls ◇
	Copper																	K, L, M, DWV Copper Rolls ‡
VE414MC AGS Groove	Steel																	Std. Wall RW Rolls ø
	Stainless																	Std. Wall RW Rolls ø
	Lt. Wall SS																	5S-10 RWx Rolls ⊕+

\*\* Standard Wall (9.5 mm/0.375")

### IMPORTANT NOTE:

For grooving lightwall stainless steel on pipe sizes 450 mm/18" and larger, contact Victaulic for details.

Tool Model	Pipe Material	Pipe Size/Schedule mm/Inches																
		100 4	125 5	150 6	200 8	250 10	300 12	350 14	400 16	450 18	500 20	550 22	600 24	650 26	700 28	750 30	800 32	900 36
VE436MC Original Groove	Steel	5 – 80 *																5 – 40 *
	Stainless																	12.7 mm/5 – 0.500" Wall *
	Lt. Wall SS																	40S Standard Rolls §
	Aluminum †																	9.5 mm/0.375" Wall Standard Rolls §
VE436MC AGS Groove	PVC Plastic																	5S, 10S, 10 Rx Rolls #
	Steel																	5 – 40 RP Rolls ◇
	Stainless																	Std. Wall 9.5 mm/0.375" RW Rolls ø
	Lt. Wall SS																	Std. Wall 9.5 mm/0.375" RW Rolls ø
																		5S, 10S RWx Rolls ⊕+

\* Standard rolls. For 150 – 350 mm/6 – 14" sizes, special tooling is available for grooving "extra-strong" pipe.

### IMPORTANT NOTE:

For 200 – 600 mm/8 – 24" sizes, the maximum wall thickness is limited to standard wall for pipe lengths shorter than 1.2m/4ft.



# Pipe Preparation – Roll Grooving

## VE460 RATINGS – MAXIMUM CAPACITY †

Pipe Material	Pipe Size/Schedule																							
	4 100	5 125	6 150	8 200	10 250	12 300	14 350	16 400	18 450	20 500	22 550	24 600	26 650	28 700	30 750	32 800	34 850	36 900	38 950	40 1000	42 1050	48 1200	50 1250	60 1500
Steel	5 – 80				5 – Extra Strong		10 – Extra Strong (.500) ^ AGS						Std. (.375 – .500) ^ AGS											
Stainless	Sch. 40 Only					.375	RW AGS																	
Lt. Wall SS	5S – 10S RX Rolls						5S/10S/10 RWX Rolls																	
Aluminum #	5 – 40																							
PVC Plastic	40 – 80			40																				
Grooving Capabilities for Original Style Groove (OGS) Coupling Styles 07, 77, and 770)																								
Steel							5 – Extra Strong (.500) ^						.250 – .500 ^											
Stainless							Std. (.375)																	
Lt. Wall SS							5S/10S/10 RX Rolls																	

† Indicates pipe size capacity. For wall thickness capacity and general tool ratings see separate Vic-Easy Tool Rating Data in publication 24.01.

‡ Use RP Rolls.

\* 6061-T4 or 6063-T4 must be used. RP Rolls must be used.

^ Maximum ratings are limited to pipe that does not exceed the yield strength of API-5L Grade "B", ASTM Grade "B", 150 Brinell Hardness Number (BHN) maximum.

## Vic-Easy Roll Grooving Tool Ratings

### (MAXIMUM CAPACITY)

Victaulic Vic-Easy roll grooving tools are designed to cold form grooves into the specified pipe to meet ANSI/AWWA C-606 and other standards and the groove dimensions specified in Victaulic Groove Specifications for each type of pipe.

These tools are designed for roll grooving pipe. To accomplish this function requires some dexterity and mechanical skills, as well as sound safety habits. Although this tool is manufactured for safe dependable operation, it is impossible to anticipate those combinations of circumstances which could result in an accident.

The operator is cautioned to always practice "Safety First" during each phase of use, including setup and maintenance of these units.

Read and understand the Tool Operating and Maintenance Instruction Manual provided with each tool before operating or performing maintenance on tools. Become familiar with the tool's operations, applications and limitations. Be particularly aware of its specific hazards.

#### IMPORTANT NOTES:

- **PVC grades that can be grooved –**  
PVC Type I Grade I – PVC 1120;  
PVC Type I Grade II – PVC 1220;  
PVC Type II Grade I – PVC 2116.
- **Copper/nickel pipe –**  
Contact Victaulic for details.
- **Light weight stainless steel pipe**  
(Sch. 10S and Sch. 5S) must be grooved using stainless Rx roll sets.

Note: Vic-Easy tools and rolls shown on this chart will produce grooves in accordance with Victaulic Roll Groove Dimension charts and to ANSI/AWWA C-606 standards.

# Pipe Preparation – Cut Grooving Tools

## Field Manual

For Complete Information  
Request Publication **24.01**



VG28GD

### VG28GD VIC-ADJUSTABLE™

- Designed for fast, easy cut grooving of steel and other metallic pipe
- A modified version (MRL) is available to groove and machine for rubber lining
- Cut grooves 20–200 mm/¾–8" pipe (50–150 mm/2–6" AWWA optional)†


**Drive Requirements:** External drive, minimum 1½ hp

**Drive Speed:** 38 rpm maximum

**Shipped Set For:** Standard groove 100–150 mm/4–6" steel pipe

**Weight:** 17 kg/37 lbs.

† Refer to Cut Grooving Tool Ratings chart on pgs. 17-10



VG824

### VG824 VIC-ADJUSTABLE

- Designed for cut grooving various metallic pipe materials
- The tool must be driven through its own integral gear box by an external power source at a maximum speed of 38 rpm
- Ideal for job site, fab shop or production cut grooving
- Cut grooves 200–600 mm/8–24" pipe†

**Drive Requirements:** External drive, minimum 1½ hp

**Drive Speed:** 38 rpm maximum

**Shipped Set For:** Standard groove, 200–300 mm/8–12" steel pipe

**Weight:** 37.2 kg/82 lbs.

**Options:** 200 mm/8" standard tool bit – 11 mm/0.437";  
550–600 mm/22–24" standard tool bit – 14 mm/0.563"

† Refer to Cut Grooving Tool Ratings chart on pgs. 17-10

## Field Groover

For Complete Information  
Request Publication **24.01**



VG46

### VG46 VIC-GROOVER

- Designed for manual or power cut grooving of a single size on steel, stainless steel, aluminum and PVC pipe
- Tools are supplied with a ratchet handle for manual operation
- Tools 50 mm/2" and larger are supplied with a power yoke
- Cut grooves 20–200 mm/¾–8" pipe†

**Drive Requirements:** Manual or external drive, minimum ½ hp./0.37 kw

**Drive Speed:** 40 rpm maximum

**Shipped Set For:** Standard groove

**Weight:** 13 kg/28 lbs.

† Refer to Cut Grooving Tool Ratings chart on pgs. 17-10

# Pipe Preparation – Cut Grooving Tools

## Plastic Groovers

For Complete Information  
Request Publication **24.01**



VPG26



VPG824

### VPG26 AND VPG824

- PVC plastic pipe requires a radius groove to reduce any point of stress concentration in this notch sensitive material
- Tools feature a high speed, router-type tool bit which cuts a radiused groove, to full depth, in one manual rotation of the tool around the pipe
- Grooves 50–600mm/2–24" pipe†

**VPG26** – 50–150mm/2–6"

**Power Requirements:** 110volt, 1 phase, 60Hz, 7 amps

**Rotation Drive:** Manual (clockwise)

**Weight:** 19 kg/41 lbs.

**Shipped Set For:** VPG26 for 50–90mm/2–3½"

**VPG824** – 200–600mm/8–24"

**Power Requirements:** 110volt, 1 phase, 60Hz, 7 amps

**Weight:** 21 kg/47 lbs.

**Shipped Set For:** VPG826 for 200–300mm/8–12"

† Refer to Cut Grooving Tool Ratings chart below

## Vic-Groover® Cut Grooving Tool Ratings (CAPACITY)

Tool Model	Pipe Material	Pipe Size/Schedule mm/Inches																									
		20 3/4	25 1	32 1 1/4	40 1 1/2	50 2	65 2 1/2	80 3	90 3 1/2	100 4	120 4 1/2	125 5	150 6	200 8	250 10	300 12	350 14	400 16	450 18	500 20	550 22	600 24					
Vic-Groover Individually Sized 20–200mm 3/4–8"	Steel													40, 80													
	Stainless													40, 80													
	Aluminum													40, 80													
	PVC													40, 80													
VG28GD Adjustable Groover	Steel													40, 80		40											
	Stainless													40, 80		40											
	Aluminum													40, 80		40											
VG824 Adjustable Groover	Steel													40, 80				Standard Wall 30, 40									
	Stainless													Standard Wall, 30, 40													
	Aluminum													Standard Wall, 30, 40													
VPG26	PVC													40, 80 PVC													
VPG824	PVC													40, 80 PVC				40									

# Pipe Preparation – Pressfit Tool/Hole Cutting Tools

## Pressfit Tool

For Complete Information  
Request Publication 24.01



PFT505

### PFT505 – Electric Tool

- The Pressfit System requires a Pressfit tool designed for securing Pressfit products onto pipe
- Jaws are available separately for rental (with rental tool) or purchase
- Pressfit tool is designed for industrial and trade use only

**Capacity:** 15–50mm/½–2" IPS Schedule 5 steel and stainless steel pipe

**Power Requirements:** 110 volt, 60 cycle, 6.5 amp

**Accessories:** Pressing jaws in 15 mm/½", 20 mm/¾", 25 mm/1", 40 mm/1½" and 50 mm/2"

**Note:** PFT505 and PFT509 components are not interchangeable



PFT509

### PFT509 – Battery Tool

- The Pressfit System requires a Pressfit tool designed for securing Pressfit products onto pipe
- Tool packages include the actual pressing tool, two (2) batteries and a charger, carrying case, and ½, ¾, 1, and 1½" press jaws
- Jaws are available separately for purchase
- Pressfit tool is designed for industrial and trade use only
- Pressfit tool is battery powered and requires a 12V battery charger

**Capacity:** 15–25 mm and 40 mm/½–1" and 1½" IPS Schedule 5 steel and stainless steel pipe

**Note:** PFT505 and PFT509 components are not interchangeable

## Hole Cutting Tools

For Complete Information  
Request Publication 24.01



HCT908

### HCT908

- One-piece hole cutting tool designed to cut holes up to 120 mm/4 ½" in carbon and stainless steel pipe
- Allows for use of Mechanical-T, Vic-Let, and Vic-O-Well outlets

**Capacity:** 32 – 200 mm/1 ¼ – 8" pipe, up to 120 mm/4 ½" hole sizes for Mechanical-T and Vic-Let

**Power Requirements:** 110 volt, 1 phase, 60 Hz, 7.0 amp

**Weight:** 10 kg/23 lbs.



VHCT900

### VHCT900

- Three-piece hole cutting tool designed to cut holes up to 90 mm/3 ½" in diameter for Mechanical-T, Vic-Let, and Vic-O-Well outlets
- Base unit clamps quickly onto the pipe in vertical, horizontal or overhead positions
- Heavy-duty drill mounts to the alignment guides and a manual feed assembly provides uniform pressure on the saw for maximum cutting efficiency

**Capacity:** 32 – 200 mm/1 ¼ – 8" pipe, up to 90 mm/3 ½" hole sizes for Mechanical-T, Vic-Let, and Vic-O-Well outlets

**Power Requirements:** grounded 120 volt, 1 phase, 60 Hz, 10 amp electrical supply. (220 volt, 1 phase, 60 Hz, 5 amp available on request)

**Weight:** 16 kg/36 lbs.

**Accessories:** Extended chain for 250–600 mm/10–24" pipe



VIC-TAP II

### VIC-TAP II

- Hole cutting tool designed for use with Mechanical-T unit for tapping into steel pipe systems under pressures up to 3450 kPa/500 psi

**Capacity:** Vic-Tap II 100–200 mm/4–8" Run × 65 mm/2 ½" Outlet

**Power Requirements:** 115 volt, 1 phase, 60 Hz, 7.5 amp

**Weight:**

(A) Drill guide base 6.8 kg/15 lbs.

(B) Drill motor and feed assembly, total wgt. 7.3 kg/16 lbs.

(C) Style 931/Valve unit, 5.4 kg/12 lb.–6.8 kg/15 lb., depending upon size (100–200 mm / 4–8")\*

**Hole Size:** 60.5 mm/2 ¾"

\* Permanently installed onto pipe

# Pipe Preparation – Pipe Cutting Tools

## Pipe Cutting Tools

For Complete Information  
Request Publication **24.01**



VCT1

### VCT1 MANUAL

- Lightweight and portable pipe cut-off tool handles 100–600mm/4–24" pipe, up to 12.7mm/0.500" thick
- Worm gear drive crank handle provides smooth, manual travel, easy control and accurate cutting

**Capacity:** 100–600mm/4–24"

**Wall Thickness:** 1.65–12.7mm/0.065–0.500" (with tips supplied)

**Tips:** Acetylene – 1 ea. #00, #0, #1 (Natural Gas and MAPP Gas tips available)

**Weight:** 10kg/22lbs.



VCT2

### VCT2 AUTOMATIC

- Rotation is powered by a small 120VAC motor with SCR remote control
- Unique tip design has stainless steel insert which extends tip life, eases cleaning and reduces backfire

**Capacity:** 150–600mm/6–24"

**Wall Thickness:** 1.65–12.7mm/0.065–0.500" (with tips supplied)

**Tips:** Acetylene – 1 ea. #00, #0, #1 (Natural Gas and MAPP Gas tips available)

**Speed Control:** SCR

**Power Required:** 120volt, 1 phase, 60Hz, 15amp

**Motor Rating:** 15W 10,000rpm

**Weight:** 15kg/33lbs.

**Accessories:** Guide rail is sold separately. Recommended for pipe 300mm/12" and above. Order Guide Rail D-600 for up to 600mm/24" pipe (others available).

# Pipe Preparation – Accessories

## Power Drive

VPD753

For Complete Information  
Request Publication 24.01



- Can be used as the power drive unit for the VE226, VE26, VE46, VE417FS and VE273SFS roll grooving tools, provided the tool is equipped with the correct base plate
- Operated with a safety foot switch

**Capacity:** See appropriate tool

**Power Requirements:** 220volt, 6amp, 50/60cycle (115volts, 15amp, 50/60Hz optional)

**Weight:** 634kg/140lbs.

## Power Mule

For Complete Information  
Request Publication 24.01



- Ideal drive for Victaulic individual Vic-Groover tools, VG28GD and VG824
- Heavy-duty, two-wheeled unit drives Victaulic cut grooving tools at the speed and power necessary for accurate grooving
- Power Mule is equipped with a Forward-Off-Reverse control, integral foot switch
- Removable and swivel head design

**Capacity:** Victaulic individual Vic-Groover tools, VG28GD, VPG26GD/MRL, VG824, VPG826/MRL

**Power Requirements:** 115volts, 15amp, 50/60cycle (220volt, 8amp, 50/60 cycle optional)

**Full Load Speed:** 35rpm

**Weight:** 86kg/190lbs.

## Adjustable Pipe Stand

VAPS112

For Complete Information  
Request Publication 24.01



- Designed for supporting pipe to be roll grooved
- Four legged portable self-standing unit permits free pipe rotation and traversing on ball transfers
- Turnstile design allows pipe to be spun around for grooving of both pipe ends without dismounting pipe from stand

**Capacity:** 20–300mm/¾–12" pipe

**Load Rating:** 490kg/1075lbs.

**Vertical Stroke:** 368mm/14½" for adjusting rod, 216mm/8½" leg adjustment, 584mm/23"

**Minimum Pipe Height from Floor:**

584mm/23" on 300mm/12" pipe

533mm/21" on 25mm/1" pipe

**Weight:** 86kg/190lbs.

**Handle Effort Required to Raise 490kg/1075 lbs. Load:** 23kg/50lbs. maximum

# Pipe Preparation – Accessories

## Adjustable Pipe Stand

VAPS224

For Complete Information  
Request Publication 24.01



- Designed specifically for supporting pipe to be roll grooved
- Self-standing heavy-duty unit permits free pipe rotation and traversing on ball transfers
- Ball transfers are mounted in a manner permitting use of pipe slings
- Turnstile design allows pipe to be spun around for grooving of both pipe ends without dismounting pipe from stand

**Capacity:** 50–600mm/2–24" pipe

**Load Rating:** 816 kg/1800 lbs.

**Vertical Stroke:** 584 mm/23"

**Minimum Pipe Height from Floor:** 325 mm/13" on 600 mm/24" pipe

**Maximum Pipe Height from Floor:** 965 mm/38" on 50 mm/2" pipe

**Weight:** 118 kg/260 lbs.

**Handle Effort Required to Raise 817 kg/1800 lbs. Load:** 23 kg/50 lbs. maximum

## Adjustable Pipe Stand

VAPS1672

For Complete Information  
Request Publication 24.01



Vic-Easy Adjustable Pipe Stands are portable and self-standing units that permit free pipe rotation and traversing on ball transfers. They are designed for direct use with Vic-Easy roll grooving tools: VE436MC and VE460.

**Capacity:** 16–72" pipe †

**Load Rating:** 10000 lbs

**Vertical Stroke:** 17"

**Min. Pipe Height from Floor:** 16" on 72" pipe

**Max. Pipe Height from Floor:** 28" on 16" pipe

† Indicates pipe size capacity. For wall thickness capacity and general tool ratings see separate Vic-Easy Tool Rating Data in publication 24.01.

## Speed Reduction Control (LSCR)

For Complete Information  
Request Publication 24.01



- Designed for electrical speed reduction on various universal power drives
- LSCR is recommended for universal power drives that operate at speeds in excess of Victaulic cut groover specifications which incorporate "universal" motors

**Capacity:** Universal motor-type power drives (Example: Ridgid\* 300 portable pipe threader) rated at 115 volt, 15 amp maximum. Not for use with induction-type motors.

**Power Requirements:** 115 volts, 15 amp, 50/60 cycle

**Weight:** 1.4 kg/3 lbs.

## Pipe Diameter Tape

For Complete Information  
Request Publication 24.01



- Pocket-sized steel tapes are available for taking circumferential measurements, marked in millimeter increments
- Tapes may be used for measuring 20–550 mm/¾–22" pipe O.D. at the base of the groove (the "C" diameter)
- Tapes are notched on the lead end to allow proper overlap within the groove for more accurate measurement

\* Ridgid is a registered trademark of the Ridge Tool Company

# Pipe Preparation

## Grooving Times

Time for pipe preparation obviously depends on widely varied factors including productivity, location, type, hardness, and wall thickness of pipe. As a gauge for typical grooving times, the following chart was prepared to include grooving time with pipe in position and tool properly set for the size and depth of groove. Times will be extended when going from one size to another for roll changes, depth stop setting, trial grooving and other minor adjustments incidental to changing pipe sizes or initial set-up time prior to the first production groove.

APPROXIMATE GROOVING TIME IN MINUTES – STEEL PIPE\*

Size Nominal Size mm Inches	Roll Groovers – Powered							Cut Groovers			
	226	273SFS	271FSD	268	417FSD	414MC	436MC	Vic-Groover		Vic-Adjustable	
								Power	Hand	VG28GD Power	VG824 Power
20 3/4	0.5 #	—	0.2	0.2	—	—	—	0.5	1.5	—	—
25 1	0.6 #	—	0.2	0.2	—	—	—	0.5	1.5	—	—
32 1 1/4	0.7 #@	—	0.2	0.2	—	—	—	0.7	2.0	—	—
40 1 1/2	0.8 #@	—	0.2	0.2	—	—	—	0.7	2.5	—	—
50 2	1.0 @≠	0.3	0.3	0.3	0.3	0.2	—	1.0	0.3	1.0	—
65 2 1/2	1.3 @≠	0.3	0.3	0.3	0.3	0.2	—	1.2	3.8	1.3	—
76.1 mm	1.3 @≠	0.3	0.3	0.3	0.3	0.2	—	1.2	3.8	1.3	—
80 3	1.4 @≠	0.4	0.4	0.4	0.4	0.2	—	1.4	4.5	1.5	—
90 3 1/2	1.4 @≠	0.4	0.4	0.4	0.4	0.2	—	1.7	5.5	2.0	—
108.1 mm	1.5 @≠	0.5	0.4	0.5	0.5	0.2	0.2	1.9	7.0	2.5	—
100 4	1.5 @≠	0.5	0.4	0.5	0.5	0.2	0.2	1.9	7.0	2.5	—
4 1/2	1.5 @≠	0.8	0.6	0.6	0.6	0.2	0.2	2.3	8.0	2.8	—
133.0 mm	1.6 @≠	1.0	0.8	0.8	0.8	0.2	0.3	2.5	9.0	3.5	—
139.7 mm	1.6 @≠	1.0	0.8	0.8	0.8	0.2	0.3	2.5	9.0	3.5	—
125 5	1.6 @≠	1.0	0.8	0.8	0.8	0.2	0.3	2.5	9.0	3.5	—
159.0 mm	1.8 @≠	1.5	1.2	0.8	1.0	0.3	0.5	3.0	10.0	4.5	—
165.1 mm	1.8 @≠	1.5	1.2	0.8	1.0	0.3	0.5	3.0	10.0	4.5	—
150 6	1.8 @≠	1.5	1.2	0.8	1.0	0.3	0.5	3.0	10.0	4.5	—
200 8	—	1.7	1.5	0.9	1.7	0.4	0.8	4.0	15.0	5.0	5.0
250 10	—	2.0	1.8	1.5	2.5	0.6	1.1	—	—	—	8.0
300 12	—	2.5	2.3	1.8	3.5	0.7	1.4	—	—	—	10.0
350 14	—	—	—	—	7.4+	3.6+	3.6+	—	—	—	12.0
400 16	—	—	—	—	8.0+	4.0+	4.0+	—	—	—	16.0
450 18	—	—	—	—	—	—	4.6+	—	—	—	20.0
500 20	—	—	—	—	—	—	5.0+	—	—	—	23.0
600 24	—	—	—	—	—	—	6.0+	—	—	—	30.0
750 30†	—	—	—	—	—	—	3.8	—	—	—	—
900 36†	—	—	—	—	—	—	—	—	—	—	—

# VE226B

@ VE226S

≠ VE226M

\* For roll groovers the times apply to the thickest pipe wall for which the tool is rated. See tool capacities. For cut groovers, the times apply to standard wall steel pipe. For other materials and thicknesses contact Victaulic for details.

+ Times for roll grooving Advanced Groove System (AGS) pipe.

† For 650 mm/26", 700 mm/28", 800 mm/32" and 1050 mm/42" grooving times contact Victaulic.



# Pipe Preparation

## Standard Pipe Wall Thickness

STANDARD PIPE WALL THICKNESS (ANSI B 36.10 AND B 36.19 FOR STAINLESS STEEL PIPE)


Size		Pipe Wall Thickness								
Nominal Size mm Inches	Actual Outside Dia. mm Inches	Schedule 5S mm Inches	Schedule 5 mm Inches	Schedule 10S mm Inches	Schedule 10 mm Inches	Schedule 20 mm Inches	Schedule 30 mm Inches	Schedule 40 mm Inches	Schedule Std. mm Inches	Schedule 80 mm Inches
20 ¾	26.9 1.050	1.65 0.065	1.65 0.065	2.11 0.083	—	—	—	2.87 0.113	2.87 0.113	3.91 0.154
25 1	33.7 1.315	1.65 0.065	1.65 0.065	2.77 0.109	—	—	—	3.38 0.133	3.38 0.133	4.55 0.179
32 1¼	42.4 1.660	1.65 0.065	1.65 0.065	2.77 0.109	—	—	—	3.56 0.140	3.56 0.140	4.85 0.191
40 1½	48.3 1.900	1.65 0.065	1.65 0.065	2.77 0.109	—	—	—	3.68 0.145	3.68 0.145	5.08 0.200
50 2	60.3 2.375	1.65 0.065	1.65 0.065	2.77 0.109	—	—	—	3.91 0.154	3.91 0.154	5.54 0.218
65 2½	73.0 2.875	2.11 0.083	2.11 0.083	3.05 0.120	—	—	—	5.16 0.203	5.16 0.203	7.01 0.276
76.1 mm	76.1 3.000	2.11 0.083	2.11 0.083	3.05 0.120	—	—	—	5.49 0.216	5.49 0.216	7.62 0.300
80 3	88.9 3.500	2.11 0.083	2.11 0.083	3.05 0.120	—	—	—	5.49 0.216	5.49 0.216	7.62 0.300
90 3½	101.6 4.000	2.11 0.083	2.11 0.083	3.05 0.120	—	—	—	5.74 0.226	5.74 0.226	8.08 0.318
108.1 mm	108.1 4.250	2.11 0.083	2.11 0.083	3.05 0.120	—	—	—	6.02 0.237	6.02 0.237	8.56 0.337
100 4	114.3 4.500	2.11 0.083	2.11 0.083	3.05 0.120	—	—	—	6.02 0.237	6.02 0.237	8.56 0.337
4½	127.0 5.000	2.11 0.083	2.11 0.083	3.05 0.120	—	—	—	6.02 0.237	6.02 0.237	8.56 0.337
133.0 mm	133.0 5.250	2.11 0.083	2.11 0.083	3.05 0.120	—	—	—	6.02 0.237	6.02 0.237	8.56 0.337
139.7 mm	139.7 5.500	2.77 0.109	2.77 0.109	3.40 0.134	—	—	—	6.55 0.258	6.55 0.258	9.53 0.375
125 5	141.3 5.563	2.77 0.109	2.77 0.109	3.40 0.134	—	—	—	6.55 0.258	6.55 0.258	9.53 0.375
159.0 mm	159.0 6.250	2.77 0.109	2.77 0.109	3.40 0.134	—	—	—	7.11 0.280	7.11 0.280	10.97 0.432
165.1 mm	165.1 6.500	2.77 0.109	2.77 0.109	3.40 0.134	—	—	—	7.11 0.280	7.11 0.280	10.97 0.432
150 6	168.3 6.625	2.77 0.109	2.77 0.109	3.40 0.134	—	—	—	7.11 0.280	7.11 0.280	10.97 0.432
200 8	219.1 8.625	2.77 0.109	2.77 0.109	3.76 0.148	—	6.35 0.250	7.04 0.277	8.18 0.322	8.18 0.322	12.70 0.500
250 10	273.0 10.750	3.40 0.134	3.40 0.134	4.19 0.165	—	6.35 0.250	7.80 0.307	9.27 0.365	9.27 0.365	15.09 0.594
300 12	323.8 12.750	3.96 0.156	3.96 0.156	4.57 0.180	—	6.35 0.250	8.38 0.330	10.31 0.406	9.53 0.375	17.48 0.688
350 14	355.6 14.000	3.96 0.156	—	4.78 0.188	6.35 0.250	7.92 0.312	9.53 0.375	11.13 0.438	9.53 0.375	19.05 0.750
400 16	406.4 16.000	4.19 0.165	—	4.78 0.188	6.35 0.250	7.92 0.312	9.53 0.375	12.70 0.500	9.53 0.375	21.44 0.844
450 18	457.0 18.000	4.19 0.165	—	4.78 0.188	6.35 0.250	7.92 0.312	11.13 0.438	14.27 0.562	9.53 0.375	23.83 0.938
500 20	508.0 20.000	4.78 0.188	—	5.54 0.218	6.35 0.250	9.53 0.375	12.70 0.500	15.09 0.594	9.53 0.375	26.19 1.031
600 24	610.0 24.000	5.54 0.218	—	6.35 0.250	6.35 0.250	9.53 0.375	14.27 0.562	17.48 0.688	9.53 0.375	30.96 1.219
650 26	660.4 26.000	—	—	—	7.92 0.312	12.70 0.500	—	—	9.53 0.375	—
700 28	711.0 28.000	—	—	—	7.92 0.312	12.70 0.500	15.88 0.625	—	9.53 0.375	—
750 30	762.0 30.000	6.35 0.250	—	7.92 0.312	7.92 0.312	12.70 0.500	15.88 0.625	—	9.53 0.375	—
800 32	813.0 32.000	—	—	—	7.92 0.312	12.70 0.500	15.88 0.625	17.48 0.688	9.53 0.375	—
900 36	914.0 36.000	—	—	—	7.92 0.312	12.70 0.500	15.88 0.625	19.05 0.750	9.53 0.375	—
42 1050	42.000 1067.0	—	—	—	—	—	—	—	0.375 9.53	—

# Pipe Preparation

## Groove Dimensions

### ROLL GROOVE SPECIFICATIONS NOTES

For Complete Information Request Publication **25.01**



- @ Always refer to the I-100 handbook for current grooving specifications.
- † On roll grooved pipe, Allowable Pipe End Separation and Deflection from center line will be ½ values listed for cut grooved pipe.
- # For non-AGS grooves in this size refer to the I-100 pocket handbook for current grooving specifications.

#### IMPORTANT NOTES:

For roll grooving pipe from 600 – 1200 mm/24 – 48" contact Victaulic.  
Coatings applied to the interior surfaces, including bolt pad mating surfaces, of our grooved and bolted plain end couplings should not exceed 0.25 mm/0.010". Also, the coating thickness applied to the gasket seating surface and within the groove on the pipe exterior should not exceed 0.25 mm/0.010".

#### GROOVE DIMENSION NOTES: SEE PG. 17-18

STANDARD ROLL GROOVE SPECIFICATIONS – STEEL AND OTHER METALLIC PIPE@†

1 Nominal Size mm Inches	2 Dimensions – mm/Inches									
	Pipe Outside Diameter O.D.			A Gasket Seat ± 0.76 ± 0.03	B Grv. Width ± 0.76 ± 0.03	C Groove Diameter		D Groove Depth ref.	T Minimum Allow. Wall Thk.	Maximum Allow. Flare Diameter
	Basic	Maximum	Minimum			Maximum	Minimum			
20 ¾	26.9 1.050	26.9 1.060	26.4 1.040	15.88 0.625	7.14 0.281	23.8 0.938	23.4 0.923	1.42 0.056	1.24 0.049	29.2 1.15
25 1	33.7 1.315	33.7 1.328	33.1 1.302	15.88 0.625	7.14 0.281	30.2 1.190	29.9 1.175	1.60 0.063	1.24 0.049	36.3 1.43
32 1¼	42.4 1.660	42.6 1.676	41.8 1.644	15.88 0.625	7.14 0.281	39.0 1.535	38.6 1.520	1.60 0.063	1.24 0.049	45.0 1.77
40 1½	48.3 1.900	48.7 1.919	47.8 1.881	15.88 0.625	7.14 0.281	45.1 1.775	44.7 1.760	1.60 0.063	1.24 0.049	51.1 2.01
50 2	60.3 2.375	60.9 2.399	59.7 2.351	15.88 0.625	8.74 0.344	57.2 2.250	56.8 2.235	1.60 0.063	1.24 0.049	63.0 2.48
65 2½	73.0 2.875	73.8 2.904	72.3 2.846	15.88 0.625	8.74 0.344	69.1 2.720	68.6 2.702	1.98 0.078	1.98 0.078	75.7 2.98
76.1 mm	76.1 3.000	77.0 3.030	75.4 2.970	15.88 0.625	8.74 0.344	72.3 2.845	71.8 2.827	1.98 0.078	1.98 0.078	78.7 3.10
80 3	88.9 3.500	89.8 3.535	88.1 3.469	15.88 0.625	8.74 0.344	84.9 3.344	84.5 3.326	1.98 0.078	1.98 0.078	91.4 3.60
90 3½	101.6 4.000	102.6 4.040	100.8 3.969	15.88 0.625	8.74 0.344	97.4 3.834	96.9 3.814	2.11 0.083	1.98 0.078	104.1 4.10
108.0 mm	108.0 4.250	109.0 4.293	107.2 4.219	15.88 0.625	8.74 0.344	103.7 4.084	103.2 4.064	2.11 0.083	1.98 0.078	110.5 4.35
100 4	114.3 4.500	115.4 4.545	113.5 4.469	15.88 0.625	8.74 0.344	110.1 4.334	109.6 4.314	2.11 0.083	1.98 0.078	116.8 4.60
120 4½	127.0 5.000	128.3 5.050	126.2 4.969	15.88 0.625	8.74 0.344	122.8 4.834	122.3 4.814	2.11 0.083	1.98 0.078	129.5 5.10
133.0 mm	133.0 5.250	134.7 5.303	132.6 5.219	15.88 0.625	8.74 0.344	129.1 5.084	128.6 5.064	2.11 0.083	1.98 0.078	135.9 5.35
139.7 mm	139.7 5.500	141.1 5.556	138.9 5.469	15.88 0.625	8.74 0.344	135.5 5.334	135.0 5.314	2.11 0.083	1.98 0.078	142.2 5.60
125 5	141.3 5.563	142.7 5.619	140.5 5.532	15.88 0.625	8.74 0.344	137.0 5.395	136.5 5.373	2.13 0.084	1.98 0.078	143.8 5.66
152.4 mm	152.4 6.000	153.8 6.056	151.6 5.969	15.88 0.625	8.74 0.344	148.1 5.830	147.5 5.808	2.16 0.085	1.98 0.078	154.9 6.10
159.0 mm	159.0 6.250	160.4 6.313	158.0 6.219	15.88 0.625	8.74 0.344	153.2 6.032	152.5 6.002	2.16 0.085	2.77 0.109	161.3 6.35
165.1 mm	165.1 6.500	166.7 6.563	164.3 6.469	15.88 0.625	8.74 0.344	160.8 6.330	160.2 6.308	2.16 0.085	2.77 0.109	167.6 6.60
150 6	168.3 6.625	169.9 6.688	167.5 6.594	15.88 0.625	8.74 0.344	164.0 6.455	163.4 6.433	2.16 0.085	2.77 0.109	170.9 6.73
200 8	219.1 8.625	220.7 8.688	218.3 8.594	19.05 0.750	11.91 0.469	214.4 8.441	213.8 8.416	2.34 0.092	2.77 0.109	223.5 8.80
250 10	273.0 10.750	274.7 10.813	272.3 10.719	19.05 0.750	11.91 0.469	268.3 10.562	267.6 10.535	2.39 0.094	3.40 0.134	277.4 10.92
300 12	323.9 12.750	325.5 12.813	323.1 12.719	19.05 0.750	11.91 0.469	318.3 12.531	317.5 12.501	2.77 0.109	3.96 0.156	328.2 12.92
14 – 24 350 – 600	<b>AGS</b> ™ See AGS Grooving Chart, pg. 17-18									


TABLE CONTINUED ON PG. 17-18

# Pipe Preparation

## Groove Dimensions

### ROLL GROOVE SPECIFICATIONS NOTES

For Complete Information Request Publication **25.01**



- @ Always refer to the I-100 handbook for current grooving specifications.
- # Gasket Seat tolerances for sizes 650 – 1050 mm/26 – 42" are +0.8 mm and -1.5 mm/+0.03" and -0.06".

#### IMPORTANT NOTES:

For roll grooving pipe from 600 – 1200 mm/24 – 48" contact Victaulic. Coatings applied to the interior surfaces, including bolt pad mating surfaces, of our grooved and bolted plain end couplings should not exceed 0.25 mm/0.010". Also, the coating thickness applied to the gasket seating surface and within the groove on the pipe exterior should not exceed 0.25 mm/0.010".

### STANDARD ROLL GROOVE SPECIFICATIONS – STEEL AND OTHER METALLIC PIPE@†

1 Nominal Size mm Inches	2 Dimensions – mm/Inches									
	Pipe Outside Diameter O.D.			A Gasket Seat ± 0.76 ± 0.03	B Grv. Width ± 0.76 ± 0.03	C Groove Diameter		Groove Depth D ref.	T Min. Allow. Wall Thickness	Max. Allow. Flare Dia.
	Basic	Maximum	Minimum			Maximum	Minimum			
<b>TABLE CONTINUED FROM PG. 17-17</b>										
355.6 14	355.6 14.000	357.2 14.063	354.8 13.969	23.83 0.938	11.91 0.469	350.0 13.781	349.3 13.751	2.77 0.109	3.96 0.156	359.7 14.16
377.0 15	377.0 14.843	379.4 14.937	376.2 14.811	23.83 0.938	11.91 0.469	371.1 14.611	370.4 14.581	2.94 0.116	4.50 0.177	381.0 15.00
406.4 16	406.4 16.000	408.0 16.063	405.6 15.969	23.83 0.938	11.91 0.469	400.8 15.781	400.1 15.751	2.77 0.109	4.19 0.165	410.5 16.16
426.0 18	426.0 16.772	428.4 16.866	425.2 16.740	23.83 0.938	11.91 0.469	419.5 16.514	418.6 16.479	3.28 0.129	4.50 0.177	430.0 16.93
457.0 18	457.0 18.000	458.8 18.063	456.4 17.969	25.40 1.000	11.91 0.469	451.6 17.781	450.9 17.751	2.77 0.109	4.78 0.188	461.3 18.16
480.0 20	480.0 18.898	482.4 18.992	479.2 18.867	25.40 1.000	11.91 0.469	473.1 18.626	472.2 18.591	3.45 0.136	5.99 0.236	484.1 19.06
508.0 20	508.0 20.000	509.6 20.063	507.2 19.969	25.40 1.000	11.91 0.469	502.4 19.781	501.7 19.751	2.77 0.109	4.78 0.188	512.1 20.16
530.0 22	530.0 20.866	532.4 20.960	529.2 20.835	25.40 1.000	11.91 0.469	522.5 20.572	521.6 20.537	3.73 0.147	5.99 0.236	534.2 21.03
559.0 22	559.0 22.000	560.4 22.063	558.0 21.969	25.40 1.000	12.70 0.500	550.1 21.656	549.3 21.626	4.37 0.172	4.78 0.188	563.9 22.20
610.0 24	610.0 24.000	611.2 24.063	608.8 23.969	25.40 1.000	12.70 0.500	600.9 23.656	600.1 23.626	4.37 0.172	5.54 0.218	614.7 24.20
630.0 26	630.0 24.803	632.4 24.897	629.2 24.772	25.40 1.000	12.70 0.500	621.3 24.459	620.4 24.424	4.37 0.172	7.01 0.276	635.0 25.00
700 28	660.4 26.000	662.8 26.093	659.6 25.969	45.45 1.75	15.88 0.625	647.7 25.500	646.1 25.437	6.35 0.250	6.35 0.250	665.5 26.20
750 30	711.0 28.000	713.6 28.093	710.4 27.969	45.45 1.75	15.88 0.625	698.5 27.500	696.9 27.437	6.35 0.250	6.35 0.250	716.3 28.20
800 32	762.0 30.000	764.4 30.093	761.2 29.969	45.45 1.75	15.88 0.625	749.3 29.500	747.7 29.437	6.35 0.250	6.35 0.250	767.1 30.20
813.0 32	813.0 32.000	815.2 32.093	812.0 31.969	45.45 1.75	15.88 0.625	800.1 31.500	798.5 31.437	6.35 0.250	6.35 0.250	817.9 32.20
900 36	914.0 36.000	916.8 36.093	913.6 35.969	45.45 1.75	15.88 0.625	901.7 35.500	900.1 35.437	6.35 0.250	6.35 0.250	919.5 36.20
1050 42	1067.0 42.000	1069.2 42.093	1066.0 41.969	50.80 2.00	15.88 0.625	1054.1 41.500	1052.5 41.437	6.35 0.250	6.35 0.250	1071.8 42.20

#### GROOVE DIMENSION NOTES:

##### Column 1: Nominal Pipe Size

##### Column 2: Pipe Outside Diameter

The average pipe outside diameter must not vary from the specifications listed in the tables on the following pages. Maximum allowable pipe ovality should not vary by more than 1%. Greater variations between the major and minor diameters will result in difficult coupling assembly. For carbon steel pipe, the maximum allowable tolerance from square-cut pipe ends is 0.8 mm/0.030" for 20 – 90 mm/¾ – 3½" sizes; 1.1 mm/0.045" for 100 – 150 mm/4 – 6" sizes; and 1.5 mm/0.060" for 200 mm/8" and larger sizes. This is measured from the true square line. Any internal and external weld beads or seams must be ground flush to the pipe surface. The inside diameter of the pipe end must be cleaned to remove coarse scale, dirt, and other foreign material that might interfere with or damage grooving rolls.

##### Column 3: Gasket Seat "A" Dimension

The "A" dimension, or the distance from the pipe end to the groove, identifies the gasket seating area. This area must be free from indentations, projections (including weld seams), and roll marks from the pipe end to the groove to ensure a leak-tight seal for the gasket. All oil, grease, and dirt must be removed.

##### Column 4: Groove Width "B" Dimension

The "B" dimension, or groove width, controls expansion, contraction, and angular deflection of flexible couplings by the distance it is located from the pipe and its width in relation to the coupling housings' "key" width.

##### Column 5: Groove Outside Diameter "C" Dimension

The "C" dimension is the proper diameter at the base of the groove. This dimension must be within the diameter's tolerance and concentric with the OD for proper coupling fit. The groove must be of uniform depth for the entire pipe circumference.

##### Column 6: Groove Depth "D" Dimension

The "D" dimension is the normal depth of the groove and is a reference for a "trial groove" only. Variations in pipe OD affect this dimension and must be altered, if necessary, to keep the "C" dimension within tolerance. This groove must conform to the "C" dimension described above.

##### Column 7: Minimum Allowable Wall Thickness "T" Dimension

The "T" dimension is the lightest grade (minimum, nominal wall thickness) of pipe that is suitable for cut or roll grooving. Pipe that is less than the minimum, nominal wall thickness for cut grooving may be roll grooved or adapted for Victaulic couplings by using Vic-Ring adapters. Vic-Ring adapters can be used in the following situations (contact Victaulic for details):

- When the pipe is less than the minimum, nominal wall thickness suitable for roll grooving
- When the pipe outside diameter is too large to roll or cut groove
- When the pipe is used in abrasive services

##### Column 8: Maximum Allowable Pipe-End Flare Diameter "F" Dimension (Standard Roll Groove Only)


Maximum allowable pipe-end flare diameter is measured at the extreme pipe-end diameter.

# Pipe Preparation

## Groove Dimensions

### ADVANCED GROOVE SYSTEM (AGS) ROLL GROOVE SPECIFICATIONS NOTES

For Complete Information Request Publication **25.09**



Exaggerated for Clarity

### WARNING

- Victaulic AGS products **MUST NOT** be used on pipe that is prepared to original groove dimensions.
- When grooving pipe for use with AGS products, Victaulic roll grooving tools must be equipped with special Victaulic AGS roll sets made specifically for use with standard-weight pipe.
- It is critical to measure the Groove Diameter "C" dimension, along with the Gasket Seat "A" dimension and the Flare Diameter "F" dimension. These measurements must be within the specifications listed in this table above for proper joint performance.

Failure to follow these instructions could cause joint failure, resulting in serious personal injury and/or property damage.

### STANDARD ADVANCED GROOVE SYSTEM (AGS) ROLL GROOVE SPECIFICATIONS – CARBON STEEL

1 Nominal Size mm Inches	2 Pipe Outside Diameter O.D.		3 T Minimum Allow. Wall Thk.	4 A Gasket Seat + 0.79/-1.60 + 0.031/-0.063	5 B Grv. Width ref.	6 C Groove Diameter		7 Maximum Allow. Flare Diameter
	Maximum	Minimum				Maximum	Minimum	
	Dimensions – mm/Inches							
355.6 14	358.0 14.094	354.8 13.969	9.5 0.375	38.1 1.500	11.56 0.455	342.9 13.500	341.8 13.455	361.4 14.23
406.4 16	408.8 16.094	405.6 15.969	9.5 0.375	38.1 1.500	11.56 0.455	393.7 15.500	392.6 15.455	412.2 16.23
457.0 18	459.6 18.094	456.4 17.969	9.5 0.375	38.1 1.500	11.56 0.455	444.5 17.500	443.4 17.455	463.0 18.23
508.0 20	510.4 20.094	507.2 19.969	9.5 0.375	38.1 1.500	11.56 0.455	495.3 19.500	494.2 19.455	513.8 20.23
610.0 24	612.0 24	608.8 23.969	9.5 0.375	38.1 1.500	11.56 0.455	596.9 23.500	595.8 23.455	615.4 24.23
660.0 25	662.8 26.094	659.6 25.969	9.5 0.375	44.5 1.750	13.6 0.535	645.9 25.430	644.4 25.370	668.0 26.30
711.0 28	713.6 28.094	710.4 27.969	9.5 0.375	44.5 1.750	13.6 0.535	696.7 27.430	695.2 27.370	718.8 28.30
762.0 30	764.4 30.094	761.2 29.969	9.5 0.375	44.5 1.750	13.6 0.535	747.5 29.430	746.0 29.370	769.6 30.30
813.0 32	815.2 32.094	812.0 31.969	9.5 0.375	44.5 1.750	13.6 0.535	798.3 31.430	796.8 31.370	820.4 32.30
914.0 36	916.8 36.094	913.6 35.969	9.5 0.375	44.5 1.750	13.6 0.535	899.9 36.430	898.4 35.370	922.0 36.30
1016.0 40	1018.4 40.094	1015.2 39.969	9.5 0.375	50.8 2.000	14.3 0.562	1000.1 39.375	998.6 39.315	1023.6 40.30
1067.0 42	1069.2 41.094	1066.0 41.969	9.5 0.375	50.8 2.000	14.3 0.562	1050.9 41.375	1049.4 41.315	1074.4 42.30
1168 46	1170.8 46.094	1167.6 45.969	9.5 0.375	50.8 2.000	14.3 0.562	1152.5 45.375	1151.0 45.315	1176.0 46.30
1219.0 48	1221.6 48.094	1218.4 47.969	9.5 0.375	50.8 2.000	14.3 0.562	1203.3 47.375	1201.8 47.315	1226.8 48.30
1372.0 54	1374.0 54.094	1370.8 53.969	9.5 0.375	63.5 2.500	14.3 0.562	1355.7 53.375	1354.2 53.315	1379.2 54.30
1422.0 56	1424.87 56.094	1421.6 55.969	9.5 0.375	63.5 2.500	14.3 0.562	1406.5 55.375	1405.0 55.315	1430.0 56.30
1524.0 60	1526.4 60.094	1523.2 59.969	9.5 0.375	63.5 2.500	14.3 0.562	1508.1 59.375	1506.6 59.315	1531.6 60.30

#### IMPORTANT NOTES:

Roll grooving removes no metal, cold forming a groove by the action of an upper male roll being forced into pipe as it is rotated by a lower female drive roll.

Roll grooving pipe to AGS specifications enlarges the pipe length by approximately 3.2 mm/1/8" for each groove. For a pipe length with an AGS roll groove at each end, the pipe length will grow approximately 6.4 mm/1/4" total. Therefore, the cut length should be adjusted to accommodate this growth. EXAMPLE: If you need a 610 mm/24" length of pipe that will contain an AGS roll groove at each end, cut the pipe to a length of 603 mm/23 3/4" to allow for this growth.

Coatings applied to the interior surfaces, including bolt pad mating surfaces, of our grooved end couplings should not exceed 0.25 mm/0.010". Also, the coating thickness applied to the gasket seating surface and within the groove on the pipe exterior should not exceed 0.25 mm/0.010".

#### GROOVE DIMENSION NOTES:

**Column 1: Nominal Pipe Size (ANSI B36.10); Basic Metric pipe size (ISO 4200)**

**Column 2: Outside Diameter**

The outside diameter of roll grooved pipe shall not vary more than the limits listed (API 5L end tolerance). The maximum allowable tolerance from square cut ends is 1.5 mm/0.063" measured from a true square line.

**Column 3: Minimum Nominal Wall Thickness**

This is the minimum nominal wall thickness which may be roll grooved.

**Column 4: Gasket Seat**

The pipe surface shall be free from indentations, roll marks, and projections from the end of the pipe to the groove, to provide a leak-tight seat for the gasket. All loose paint, scale, dirt, chips, grease, and rust must be removed. Beveled carbon steel pipe may be used provided the wall thickness is standard wall (9.5 mm/375") and the bevel meets ASTM A53 and/or API 5L (30° +5°/-0°). Gasket seat "A" is measured from the end of the pipe.

**Column 5: Groove Width**

Bottom of groove must be free of loose dirt, chips, rust and scale that may interfere with proper coupling assembly. Corners at bottom of groove must be radiused R .09 (R 2.3). Only Victaulic roll grooving tools may be used to groove pipe. Groove width and corner radii will be attained with properly maintained Victaulic tools.

**Column 6: Groove Diameter**

The groove must be of uniform depth for the entire pipe circumference. Groove must be maintained within the "C" diameter limits listed. Standard weight carbon steel pipe shall be prepared with Victaulic "RW" rolls.

**Column 7: Maximum Allowable Pipe End Flare Diameter**


Dimension measured at the most extreme pipe end diameter, square cut or beveled.

# Pipe Preparation

## Groove Dimensions

### COPPER TUBING ROLL GROOVE SPECIFICATIONS NOTES FOR CTS STANDARD

For Complete Information Request Publication **25.06**



COPPER TUBING ROLL GROOVE SPECIFICATIONS FOR CTS STANDARD—ASTM B-88®

1 Nominal Size mm Inches	2 Actual Outer Dia.		3 Gasket Seat			4 Groove Width		5 Groove Dia.		6 Grv. Depth	7 Wall Thick.	8 Flare Dia.
	Max. mm Inches	Min. mm Inches	A Basic mm Inches	A Max. mm Inches	A Min. mm Inches	B Max. mm Inches	B Min. mm Inches	C Max. mm Inches	C Min. mm Inches	D (Ref. only) mm Inches	T Min. mm Inches	Max. mm Inches
54.0 2	54.0 2.127	53.9 2.123	15.5 0.610	16.3 0.640	14.7 0.580	8.4 0.330	7.6 0.300	51.5 2.209	51.0 2.009	1.2 0.048	DWV	56.4 2.220
66.7 2½	66.7 2.627	66.6 2.623	15.5 0.610	16.3 0.640	14.7 0.580	8.4 0.330	7.6 0.300	64.1 2.525	63.6 2.505	1.2 0.050	1.7 0.065	69.1 2.720
79.4 3	79.4 3.127	79.3 3.123	15.5 0.610	16.3 0.640	14.7 0.580	8.4 0.330	7.6 0.300	76.8 3.025	76.3 3.005	1.2 0.050	DWV	81.8 3.220
104.8 4	104.8 4.127	104.7 4.123	15.5 0.610	16.3 0.640	14.7 0.580	8.4 0.330	7.6 0.300	102.1 4.019	101.6 3.999	1.4 0.053	DWV	107.2 4.220
130.2 5	130.2 5.127	130.1 5.123	15.5 0.610	16.3 0.640	14.7 0.580	8.4 0.330	7.6 0.300	127.0 4.999	126.5 4.979	1.4 0.053	DWV	132.6 5.220
155.6 6	155.6 6.127	155.5 6.123	15.5 0.610	16.3 0.640	14.7 0.580	8.4 0.330	7.6 0.300	152.3 5.999	151.9 5.979	1.6 0.063	DWV	158.0 6.220
206.4 8	206.4 8.127	206.3 8.121	15.5 0.610	16.3 0.640	14.7 0.580	8.4 0.330	7.6 0.300	202.2 7.959	201.7 7.939	2.1 0.083	DWV	208.8 8.220

@ Always refer to the I-600 handbook for current grooving specifications.

#### GROOVE DIMENSION NOTES:

**Column 1: Nominal ASTM B-88 drawn copper tubing size as indicated in the chart heading**

#### Column 2: Outside Diameter

The outside diameter of roll grooved tubing shall not vary more than the tolerance listed. The maximum allowable tolerance from square cut ends is 0.8 mm/0.030" for 54.0–79.4 mm/2–3"; 1.1 mm/0.045" for 104.8–155.6 mm/4–6", measured from true square line.

#### Column 3: Gasket Seat

The tubing surface shall be free from indentations, roll marks, and projections from the end of the tubing to the groove, to provide a leak-tight seat for the gasket. All loose scales, dirt, chips and grease must be removed.

#### Column 4: Groove Width

Bottom of groove to be free of loose dirt, chips and scale that may interfere with proper coupling assembly.

#### Column 5: Groove Outside Diameter

The groove must be uniform depth for the entire tubing circumference. Groove must be maintained within the "C" diameter tolerance listed.

#### Column 6: Groove Depth

For reference only. Groove must conform to the groove diameter "C" listed.

#### Column 7: Minimum Allowable Wall Thickness "T" Dimension

ASTM B-306 drain waste and vent (DWV) is minimum wall thickness copper tubing which may be roll grooved.

#### Column 8: Maximum Allowable End Flare Diameter


Measured at the most extreme tubing end diameter.

# Pipe Preparation

## Groove Dimensions

### COPPER TUBING ROLL GROOVE SPECIFICATIONS NOTES FOR AUSTRALIAN STANDARD

For Complete Information Request Publication **22.10**



COPPER TUBING ROLL GROOVE SPECIFICATIONS FOR AUSTRALIAN STANDARD-AS 1432@

1 Nominal Size mm	2 Actual Outer Dia.		3 Gasket Seat			4 Groove Width		5 Groove Dia.		6 Grv. Depth	7 Flare Dia.
	Max. mm Inches	Min. mm Inches	A Basic mm Inches	A Max. mm Inches	A Min. mm Inches	B Max. mm Inches	B Min. mm Inches	C Max. mm Inches	C Min. mm Inches	D (Ref. only) mm Inches	Max. mm Inches
DN50	50.80 2.000	50.67 1.995	15.87 0.625	16.64 0.655	15.11 0.595	8.4 0.330	7.6 0.300	48.21 1.898	47.70 1.878	1.25 0.049	53.06 2.089
DN65	63.50 2.500	63.35 2.494	15.87 0.625	16.64 0.655	15.11 0.595	8.4 0.330	7.6 0.300	60.88 2.397	60.38 2.377	1.27 0.050	65.83 2.592
DN80	76.10 3.000	76.02 2.993	15.87 0.625	16.64 0.655	15.11 0.595	8.4 0.330	7.6 0.300	73.56 2.896	73.05 2.876	1.27 0.050	78.51 3.091
DN100	101.60 4.000	101.35 3.990	15.87 0.625	16.64 0.655	15.11 0.595	8.4 0.330	7.6 0.300	98.78 3.889	98.27 3.869	1.35 0.053	103.88 4.090
DN125	127.00 5.000	126.75 4.990	15.87 0.625	16.64 0.655	15.11 0.595	8.4 0.330	7.6 0.300	123.67 4.869	123.16 4.849	1.60 0.063	128.77 5.070
DN150	152.40 6.000	152.10 5.988	15.87 0.625	16.64 0.655	15.11 0.595	8.4 0.330	7.6 0.300	149.05 5.868	148.54 5.848	1.60 0.063	154.66 6.089

@ Always refer to the I-600 handbook for current grooving specifications.

#### GROOVE DIMENSION NOTES:

**Column 1: Nominal AS-1432 drawn copper tubing size as indicated in the chart heading**

#### Column 2: Outside Diameter

The outside diameter of roll grooved tubing shall not vary more than the tolerance listed. The maximum allowable tolerance from square cut ends is 0.8 mm/0.030" for DN50 – DN80 mm/2 – 3"; 1.1 mm/0.045" for DN100 – DN150 mm/4 – 6", measured from true square line.

#### Column 3: Gasket Seat

The tubing surface shall be free from indentations, roll marks, and projections from the end of the tubing to the groove, to provide a leak-tight seat for the gasket. All loose scales, dirt, chips and grease must be removed.

#### Column 4: Groove Width

Bottom of groove to be free of loose dirt, chips and scale that may interfere with proper coupling assembly.

#### Column 5: Groove Outside Diameter

The groove must be uniform depth for the entire tubing circumference. Groove must be maintained within the "C" diameter tolerance listed.

#### Column 6: Groove Depth

For reference only. Groove must conform to the groove diameter "C" listed.

#### Column 7: Maximum Allowable End Flare Diameter


Measured at the most extreme tubing end diameter.

# Pipe Preparation

## Groove Dimensions

### COPPER TUBING ROLL GROOVE SPECIFICATIONS NOTES FOR EUROPEAN STANDARD

For Complete Information Request Publication **22.11**



COPPER TUBING ROLL GROOVE SPECIFICATIONS FOR EUROPEAN STANDARD – EN1057 ©

1 Nominal Size mm	2 Actual Outer Dia.		3 Gasket Seat			4 Groove Width		5 Groove Dia.		6 Grv. Depth	7 Flare Dia.
	Max. mm Inches	Min. mm Inches	A Basic mm Inches	A Max. mm Inches	A Min. mm Inches	B Max. mm Inches	B Min. mm Inches	C Max. mm Inches	C Min. mm Inches	D (Ref. only) mm Inches	Max. mm Inches
54.0	54.07 2.129	53.93 2.123	15.87 0.625	16.64 0.655	15.11 0.595	8.38 0.330	7.62 0.300	51.51 2.028	51.00 2.008	1.25 0.049	56.39 2.220
64.0	64.07 2.522	63.93 2.517	15.87 0.625	16.64 0.655	15.11 0.595	8.38 0.330	7.62 0.300	61.47 2.420	60.96 2.400	1.27 0.050	66.41 2.615
66.7	66.77 2.629	66.63 2.623	15.87 0.625	16.64 0.655	15.11 0.595	8.38 0.330	7.62 0.300	64.14 2.525	63.63 2.505	1.27 0.050	69.09 2.720
76.1	76.17 2.999	76.03 2.993	15.87 0.625	16.64 0.655	15.11 0.595	8.38 0.330	7.62 0.300	73.41 2.890	72.90 2.870	1.35 0.053	78.61 3.095
88.9	88.79 3.496	88.83 3.497	15.87 0.625	16.64 0.655	15.11 0.595	8.38 0.330	7.62 0.300	85.70 3.374	85.19 3.354	1.60 0.063	91.63 3.607
108.0	108.07 4.255	107.93 4.249	15.87 0.625	16.64 0.655	15.11 0.595	8.38 0.330	7.62 0.300	104.80 4.126	104.29 4.106	1.60 0.063	110.54 4.352
133.0	133.20 5.244	132.80 5.228	15.87 0.625	16.64 0.655	15.11 0.595	8.38 0.330	7.62 0.300	129.29 5.090	128.78 5.070	1.85 0.073	135.79 5.346
159.0	159.20 6.280	158.80 6.252	15.87 0.625	16.64 0.655	15.11 0.595	8.38 0.330	7.62 0.300	155.30 6.114	154.79 6.094	1.85 0.073	161.80 6.370

@ Always refer to the I-600 handbook for current grooving specifications.

#### GROOVE DIMENSION NOTES:

**Column 1: Nominal EN1057 drawn copper tubing size as indicated in the chart heading**

#### Column 2: Outside Diameter

The outside diameter of roll grooved tubing shall not vary more than the tolerance listed. The maximum allowable tolerance from square cut ends is 0.8 mm/0.030" for 54.0–88.9 mm; 1.1 mm/0.045" for 108.0–159.0 mm, measured from true square line.

#### Column 3: Gasket Seat

The tubing surface shall be free from indentations, roll marks, and projections from the end of the tubing to the groove, to provide a leak-tight seat for the gasket. All loose scales, dirt, chips and grease must be removed.

#### Column 4: Groove Width

Bottom of groove to be free of loose dirt, chips and scale that may interfere with proper coupling assembly.

#### Column 5: Groove Outside Diameter

The groove must be uniform depth for the entire tubing circumference. Groove must be maintained within the "C" diameter tolerance listed.

#### Column 6: Groove Depth

For reference only. Groove must conform to the groove diameter "C" listed.

#### Column 7: Maximum Allowable End Flare Diameter


Measured at the most extreme tubing end diameter.

# Pipe Preparation

## Groove Dimensions

### STANDARD CUT GROOVE SPECIFICATIONS NOTES

For Complete Information Request Publication 25.01



#### GROOVE DIMENSION NOTES:

##### Column 1: Nominal Pipe Size

##### Column 2: Outside Diameter

The outside diameter of cut grooved pipe shall not vary more than the tolerance listed. For carbon steel pipe the maximum allowable tolerance from square cut ends to 0.76 mm/0.030" for 20–90 mm/¾–3½"; 1.14 mm/0.045" for 100–150 mm/4–6"; and 1.5 mm/0.060" for sizes 200 mm/8" O.D. and above measured from true square line.

##### Column 3: Gasket Seat

The pipe surface shall be free from indentations, roll marks, and projections from the end of the pipe to the groove, to provide a leak-tight seal for the gasket. All loose paint, scale, dirt, chips, grease and rust must be removed. It continues to be Victaulic's first recommendation that pipe be square cut. When using beveled pipe contact Victaulic for details. Square cut pipe must be used with FlushSeal and EndSeal gaskets. Gasket seat "A" is measured from the end of the pipe.

##### Column 4: Groove Width

The bottom of groove to be free of loose dirt, chips, rust and scale that may interfere with proper coupling assembly. Maximum permissible radius at bottom of groove is 3.8 mm/0.15".

##### Column 5: Groove Outside Diameter

The groove must be of uniform depth for the entire pipe circumference. Groove must be maintained within the "C" diameter tolerance listed.

##### Column 6: Groove Depth

For reference only. Groove must conform to the groove diameter "C" listed.

##### Column 7: Minimum Allowable Wall Thickness

This is the minimum wall thickness which may be cut grooved.

### STANDARD CUT GROOVE SPECIFICATIONS – STEEL AND OTHER METALLIC PIPE @

1 Nominal Size mm Inches	2 Dimensions – mm/Inches								
	Pipe Outside Diameter O.D.			A Gasket Seat ± 0.76 ± 0.03	B Grv. Width ± 0.76 ± 0.03	C Groove Diameter		D Groove Depth ref.	T Minimum Allow. Wall Thk.
	Basic	Maximum	Minimum			Maximum	Minimum		
20 ¾	26.9 1.050	26.9 1.060	26.4 1.040	15.88 0.625	7.95 0.313	23.8 0.938	23.4 0.923	1.42 0.056	2.87 0.113
25 1	33.7 1.315	33.7 1.328	33.1 1.302	15.88 0.625	7.95 0.313	30.2 1.190	29.9 1.175	1.60 0.063	3.38 0.133
32 1¼	42.4 1.660	42.6 1.676	41.8 1.644	15.88 0.625	7.95 0.313	39.0 1.535	38.6 1.520	1.60 0.063	3.56 0.140
40 1½	48.3 1.900	48.7 1.919	47.8 1.881	15.88 0.625	7.95 0.313	45.1 1.775	44.7 1.760	1.60 0.063	3.68 0.145
50 2	60.3 2.375	60.9 2.399	59.7 2.351	15.88 0.625	7.95 0.313	57.2 2.250	56.8 2.235	1.60 0.063	3.91 0.154
65 2½	73.0 2.875	73.8 2.904	72.3 2.846	15.88 0.625	7.95 0.313	69.1 2.720	68.6 2.702	1.98 0.078	4.78 0.188
76.1 mm	76.1 3.000	77.0 3.030	75.4 2.970	15.88 0.625	7.95 0.313	72.3 2.845	71.8 2.827	1.98 0.078	4.78 0.188
80 3	88.9 3.500	89.8 3.535	88.1 3.469	15.88 0.625	7.95 0.313	84.9 3.344	84.5 3.326	1.98 0.078	4.78 0.188
90 3½	101.6 4.000	102.6 4.040	100.8 3.969	15.88 0.625	7.95 0.313	97.4 3.834	96.9 3.814	2.11 0.083	4.78 0.188
108.0 mm	108.0 4.250	109.0 4.293	107.2 4.219	15.88 0.625	9.53 0.375	103.7 4.084	103.2 4.064	2.11 0.083	5.17 0.203
100 4	114.3 4.500	115.4 4.545	113.5 4.469	15.88 0.625	9.53 0.375	110.1 4.334	109.6 4.314	2.11 0.083	5.17 0.203
120 4½	127.0 5.000	128.3 5.050	126.2 4.969	15.88 0.625	9.53 0.375	122.8 4.834	122.3 4.814	2.11 0.083	5.17 0.203
133.0 mm	133.0 5.250	134.7 5.303	132.6 5.219	15.88 0.625	9.53 0.375	129.1 5.084	128.6 5.064	2.11 0.083	5.17 0.203
139.7 mm	139.7 5.500	141.1 5.556	138.9 5.469	15.88 0.625	9.53 0.375	135.5 5.334	135.0 5.314	2.11 0.083	5.17 0.203
125 5	141.3 5.563	142.7 5.619	140.5 5.532	15.88 0.625	9.53 0.375	137.0 5.395	136.5 5.373	2.13 0.084	5.17 0.203
152.4 mm	152.4 6.000	153.8 6.056	151.6 5.969	15.88 0.625	9.53 0.375	148.1 5.830	147.5 5.808	2.16 0.085	5.56 0.219
159.0 mm	159.0 6.250	160.4 6.313	158.0 6.219	15.88 0.625	9.53 0.375	153.2 6.032	152.5 6.002	2.16 0.085	6.32 0.249
165.1 mm	165.1 6.500	166.7 6.563	164.3 6.469	15.88 0.625	9.53 0.375	160.8 6.330	160.2 6.308	2.16 0.085	5.56 0.219
150 6	168.3 6.625	169.9 6.688	167.5 6.594	15.88 0.625	9.53 0.375	164.0 6.455	163.4 6.433	2.16 0.085	5.56 0.219
200 8	219.1 8.625	220.7 8.688	218.3 8.594	19.05 0.750	11.13 0.438	214.4 8.441	213.8 8.416	2.34 0.092	6.05 0.238
250 10	273.0 10.750	274.7 10.813	272.3 10.719	19.05 0.750	12.70 0.500	268.3 10.562	267.6 10.535	2.39 0.094	6.35 0.250
300 12	323.9 12.750	325.5 12.813	323.1 12.719	19.05 0.750	12.70 0.500	318.3 12.531	317.5 12.501	2.77 0.109	7.09 0.279

TABLE CONTINUED ON PG. 17-24

\* 14 mm<sup>9</sup>/<sub>16</sub> (0.562") width groove is required in sizes 550–600 mm/22–24" in order to obtain the maximum allowable pipe end movement listed in Performance Data Charts. 12 mm/½" width groove will give ½ the maximum allowable shown for 550–600 mm/22–24". For double groove tool bit information, contact Victaulic.

@ Always refer to the I-100 handbook for current grooving specifications.




# Pipe Preparation

## Groove Dimensions

### STANDARD CUT GROOVE SPECIFICATIONS NOTES

For Complete Information Request Publication **25.01**



#### GROOVE DIMENSION NOTES:

##### Column 1: Nominal Pipe Size

##### Column 2: Outside Diameter

The outside diameter of cut grooved pipe shall not vary more than the tolerance listed. For carbon steel pipe the maximum allowable tolerance from square cut ends to 0.76 mm/0.030" for 20–90 mm/¾–3½"; 1.14 mm/0.045" for 100–150 mm/4–6"; and 1.5 mm/0.060" for sizes 200 mm/8" O.D. and above measured from true square line.

##### Column 3: Gasket Seat

The pipe surface shall be free from indentations, roll marks, and projections from the end of the pipe to the groove, to provide a leak-tight seal for the gasket. All loose paint, scale, dirt, chips, grease and rust must be removed. It continues to be Victaulic's first recommendation that pipe be square cut. When using beveled pipe contact Victaulic for details. Square cut pipe must be used with FlushSeal and EndSeal gaskets. Gasket seat "A" is measured from the end of the pipe.

##### Column 4: Groove Width

The bottom of groove to be free of loose dirt, chips, rust and scale that may interfere with proper coupling assembly. Maximum permissible radius at bottom of groove is 3.8 mm/015".

##### Column 5: Groove Outside Diameter

The groove must be of uniform depth for the entire pipe circumference. Groove must be maintained within the "C" diameter tolerance listed.

##### Column 6: Groove Depth

For reference only. Groove must conform to the groove diameter "C" listed.

##### Column 7: Minimum Allowable Wall Thickness

This is the minimum wall thickness which may be cut grooved.

### STANDARD CUT GROOVE SPECIFICATIONS – STEEL AND OTHER METALLIC PIPE@

1 Nominal Size mm Inches	2 Dimensions – mm/Inches								
	Pipe Outside Diameter O.D.			A Gasket Seat ± 0.76 ± 0.03	B Grv. Width ± 0.76 ± 0.03	C Groove Diameter		Groove Depth D ref.	T Min. Allow. Wall Thickness
	Basic	Maximum	Minimum			Maximum	Minimum		
<b>TABLE CONTINUED FROM PG. 17-23</b>									
355.6 14	355.6 14.000	357.2 14.063	354.8 13.969	23.83 0.938	12.70 0.500	350.0 13.781	349.3 13.751	2.77 0.109	7.14 0.281
377.0 mm	377.0 14.843	379.4 14.937	376.2 14.811	23.83 0.938	12.70 0.500	371.1 14.611	370.4 14.581	2.94 0.116	8.00 0.315
15"	381.0 15.000	382.6 15.063	380.2 14.969	23.83 0.938	12.70 0.500	375.4 14.781	374.7 14.751	2.77 0.109	7.92 0.312
406.4 16	406.4 16.000	408.0 16.063	405.6 15.969	23.83 0.938	12.70 0.500	400.8 15.781	400.1 15.751	2.77 0.109	7.92 0.312
426.0 mm	426.0 16.772	428.4 16.866	425.2 16.740	23.83 0.938	12.70 0.500	419.5 16.514	418.6 16.479	3.28 0.129	8.51 0.335
457.0 18	457.0 18.000	458.8 18.063	456.4 17.969	25.40 1.000	12.70 0.500	451.6 17.781	450.9 17.751	2.77 0.109	7.92 0.312
480.0 mm	480.0 18.898	482.4 18.992	479.1 18.863	25.40 1.000	12.70 0.500	473.1 18.626	472.2 18.591	3.45 0.136	8.99 0.354
508.0 20	508.0 20.000	509.6 20.063	507.2 19.969	25.40 1.000	12.70 0.500	502.4 19.781	501.7 19.751	2.77 0.109	7.92 0.312
530.0 mm	530.0 20.866	532.4 20.960	529.2 20.835	25.40 1.000	12.70 0.500	522.5 20.572	521.6 20.537	3.73 0.147	8.99 0.354
559.0 22	559.0 22.000	560.4 22.063	558.0 21.969	25.40 1.000	14.30 0.563	550.1 21.656	549.3 21.626	4.37 0.172	9.53 0.375
610.0 24	610.0 24.000	611.2 24.063	608.8 23.969	25.40 1.000	14.30 0.563	600.9 23.656	600.1 23.626	4.37 0.172	9.53 0.375
630.0 mm	630.0 24.803	632.4 24.897	629.2 24.772	25.40 1.000	14.30 0.563	621.3 24.459	620.4 24.424	4.37 0.172	10.00 0.394
650 26 #	660.4 26.000	662.8 26.093	659.6 25.969	45.45 1.75	15.88 0.625	647.7 25.500	646.1 25.437	6.35 0.250	15.88 0.625
700 28 #	711.0 28.000	713.6 28.093	710.4 27.969	45.45 1.75	15.88 0.625	698.5 27.500	696.9 27.437	6.35 0.250	15.88 0.625
28"	733.4 28.875	735.0 28.938	732.6 28.844	25.40 1.00	15.88 0.625	724.7 28.531	723.9 28.501	4.37 0.172	11.10 0.437
750 30 #	762.0 30.000	764.4 30.093	761.2 29.969	45.45 1.75	15.88 0.625	749.3 29.500	747.7 29.437	6.35 0.250	15.88 0.625
30"	787.4 31.000	789.0 31.063	786.6 30.969	25.4 1.00	15.88 0.625	777.1 30.594	776.3 30.564	5.16 0.203	12.70 0.500
800 32 #	813.0 32.000	815.2 32.093	812.0 31.969	45.45 1.75	15.88 0.625	800.1 31.500	798.5 31.437	6.35 0.250	15.88 0.625
900 36 #	914.0 36.000	916.8 36.093	913.6 35.969	45.45 1.75	15.88 0.625	901.7 35.500	900.1 35.437	6.35 0.250	15.88 0.625
1050 42 #	1067.0 42.000	1069.2 42.093	1066.0 41.969	50.80 2.00	15.88 0.625	1054.1 41.500	1052.5 41.437	6.35 0.250	15.88 0.625

\* 14 mm/9/16"(0.562") width groove is required in sizes 550–600 mm/22–24" in order to obtain the maximum allowable pipe end movement listed in Performance Data Charts. 12 mm/1/2" width groove will give 1/2 the maximum allowable shown for 550–600 mm/22–24". For double groove tool bit information, contact Victaulic.

@ Always refer to the I-100 handbook for current grooving specifications.

# Pipe Preparation

## Groove Dimensions

### "ES" ROLL/CUT GROOVE SPECIFICATIONS NOTES

For Complete Information Request Publication 25.02

#### GROOVE DIMENSION NOTES:

##### Column 1: Nominal Pipe Size

Nominal metric (ISO) pipe size.

##### Column 2: Outside Diameter

Metric (ISO) outside diameter. The outside diameter of roll grooved pipe shall not vary more than the tolerance listed. For carbon steel pipe, the maximum allowable tolerance from square cut ends is 0.030" for 20–90 mm/¾–3½"; 0.045" for 100–150 mm/4–6"; and 0.060" for sizes 203.2 mm and above measured from true square line. For (ISO) metric pipe, the maximum allowable tolerance from square cut ends is 0.76 mm for sizes 20–80 mm; 1.14 mm for sizes 100–150 mm; and 1.52 mm for sizes 200 mm and above, measured from the true square line.

##### Column 3: Gasket Seat

The pipe surface shall be free from indentations, roll marks, and projections from the end of the pipe to the groove, to provide a leak-tight seal for the gasket. All loose paint, scale, dirt, chips, grease and rust must be removed. Square cut pipe must be used with FlushSeal and EndSeal gaskets. Gasket seat "A" is measured from the end of the pipe.

##### Column 4: Groove Width

bottom of groove to be free of loose dirt, chips, rust and scale that may interfere with proper coupling assembly. Corners at bottom of roll groove must be radiused. For carbon steel pipe, 0.04R on 40–300 mm/1½–12". For (ISO) metric pipe, 1.2R mm on 20–300 mm.

##### Column 5: Groove Outside Diameter

The groove must be uniform depth for the entire pipe circumference. Groove must be maintained within the "C" diameter tolerance listed.

##### Column 6: Groove Depth

For reference only. Groove must conform to the groove diameter "C" listed.

##### Column 7: Minimum Allowable Wall Thickness


This is the minimum wall thickness which may be grooved.

##### Column 8: Maximum Allowable End Flare Diameter

Measured at the most extreme pipe end diameter square cut or beveled.

### "ES" CUT GROOVE SPECIFICATIONS @

1		2		3		4		5		6	7
Size		Pipe Outside Dia. mm Inches		Dimensions – mm/Inches							
Nominal Size mm Inches	Actual Outside Diameter mm Inches	Tolerance		Gasket Seat A		Grv. Width B		Groove Diameter C		D Groove Depth ref.	T Minimum Allow. Wall Thick.
		+	-	Basic	Tol.	Basic	Tol. +0.25 +0.010	Basic	Tol. +0.00 +0.000		
50 2	60.3 2.375	+0.61 +0.024	-0.61 -0.024	14.27 0.562	±0.25 ±0.010	6.48 0.255	-0.13 -0.005	57.15 2.250	-0.38 -0.015	1.60 0.063	3.91 0.154
65 2½	73.0 2.875	+0.74 +0.029	-0.74 -0.029	14.27 0.562	±0.25 ±0.010	6.48 0.255	-0.13 -0.005	69.09 2.720	-0.46 -0.018	1.98 0.078	4.78 0.188
80 3	88.9 3.500	+0.89 +0.035	-0.79 -0.031	14.27 0.562	±0.25 ±0.010	6.48 0.255	-0.13 -0.005	84.94 3.344	-0.46 -0.018	1.98 0.078	4.78 0.188
100 4	114.3 4.500	+1.14 +0.045	-0.79 -0.031	15.37 0.605	±0.38 ±0.015	7.75 0.305	-0.13 -0.005	110.08 4.334	-0.51 -0.020	2.11 0.083	5.16 0.203
150 6	168.3 6.625	+1.60 +0.063	-0.79 -0.031	15.37 0.605	±0.38 ±0.015	7.75 0.305	-0.13 -0.005	163.96 6.455	0.56 -0.022	2.16 0.085	5.56 0.219
200 8	219.1 8.625	+1.60 +0.063	-0.79 -0.031	18.14 0.714	±0.38 ±0.015	10.16 0.400	-0.25 -0.010	214.40 8.441	-0.64 -0.025	2.34 0.092	6.05 0.238
250 10	273.0 10.750	+1.60 +0.063	-0.79 -0.031	18.14 0.714	±0.38 ±0.015	10.16 0.400	-0.25 -0.010	268.28 10.562	-0.69 -0.027	2.39 0.094	6.35 0.250
300 12	323.9 12.750	+1.60 +0.063	-0.79 -0.031	18.14 0.714	±0.38 ±0.015	10.16 0.400	-0.25 -0.010	318.29 12.531	-0.76 -0.030	2.77 0.109	7.09 0.279



Exaggerated for Clarity


@ Always refer to the I-100 handbook for current grooving specifications.

#### IMPORTANT NOTES:

Coatings applied to the interior surfaces, including bolt pad mating surfaces, of our grooved and bolted plain end couplings should not exceed 0.25 mm/0.010". Also, the coating thickness applied to the gasket seating surface and within the groove on the pipe exterior should not exceed 0.25 mm/0.010".

### "ES" ROLL GROOVE SPECIFICATIONS @

1		2		3		4		5		6	7	8
Size		Pipe Outside Dia. mm Inches		Dimensions – mm/Inches								
Nominal Size mm Inches	Actual Out. Dia. mm Inches	Tolerance		Gasket Seat A		Grv. Width B		Groove Dia. C		D Groove Depth ref.	T Minimum Allow. Wall Thick.	Maximum Allow. Flare Diameter
		+	-	Basic	Tol.	Basic	Tol. +0.00 +0.000	Basic	Tol. +0.00 +0.000			
50 2	60.3 2.375	+0.61 +0.024	-0.61 -0.024	14.43 0.572	±0.51 -0.020	6.35 0.250	+0.38 +0.015	57.15 2.250	-0.38 -0.015	1.60 0.063	1.65 0.065	63.0 2.48
65 2½	73.0 2.875	+0.74 +0.029	-0.74 -0.029	14.53 0.572	±0.51 -0.020	6.35 0.250	+0.38 +0.015	69.09 2.720	-0.46 -0.018	1.98 0.078	2.11 0.083	75.7 2.98
80 3	88.9 3.500	+0.89 +0.035	-0.79 -0.031	14.53 0.572	±0.51 -0.020	6.35 0.250	+0.38 +0.015	84.94 3.344	-0.46 -0.018	2.11 0.083	2.11 0.083	91.4 3.60
100 4	114.3 4.500	+1.14 +0.045	-0.79 -0.031	15.49 0.610	±0.51 -0.020	7.62 0.300	+0.51 +0.020	110.08 4.334	-0.51 -0.020	2.11 0.083	2.11 0.083	116.8 4.60
150 6	168.3 6.625	+1.60 +0.063	-0.79 -0.031	15.49 0.610	±0.51 -0.020	7.62 0.300	+0.51 +0.020	163.96 6.455	0.56 -0.022	2.16 0.085	2.77 0.109	170.9 6.73
200 8	219.1 8.625	+1.60 +0.063	-0.79 -0.031	18.26 0.719	±0.51 -0.020	9.91 0.390	+0.51 +0.020	214.40 8.441	-0.64 -0.025	2.34 0.092	2.77 0.109	223.5 8.80
250 10	273.0 10.750	+1.60 +0.063	-0.79 -0.031	18.26 0.719	±0.51 -0.020	9.91 0.390	+0.51 +0.020	268.28 10.562	-0.69 -0.027	2.39 0.094	3.40 0.134	277.4 10.92
300 12	323.9 12.750	+1.60 +0.063	-0.79 -0.031	18.26 0.719	±0.51 -0.020	9.91 0.390	+0.51 +0.020	318.29 12.531	-0.76 -0.030	2.77 0.109	3.96 0.156	328.2 12.92



Exaggerated for Clarity

@ Always refer to the I-100 handbook for current grooving specifications.

#### IMPORTANT NOTES:


Coatings applied to the interior surfaces, including bolt pad mating surfaces, of our grooved and bolted plain end couplings should not exceed 0.25 mm/0.010". Also, the coating thickness applied to the gasket seating surface and within the groove on the pipe exterior should not exceed 0.25 mm/0.010".

# Pipe Preparation

## Groove Dimensions

### ROLL GROOVE SPECIFICATIONS NOTES FOR JAPANESE INDUSTRIAL STANDARD PIPE (JIS)

For Complete Information Request Publication **25.08**



### STANDARD ROLL GROOVE SPECIFICATIONS – JAPANESE INDUSTRIAL STANDARD PIPE @ †

1	2										3	4	5	6	7	8
	Dimensions – mm/Inches															
	Pipe Outside Diameter O.D.			A Gasket Seat ± 0.76 ± 0.03	B Grv. Width ± 0.76 ± 0.03	C Groove Diameter		D Groove Depth ref.	T Minimum Allow. Wall Thk.	Maximum Allow. Flare Diameter						
Basic	Maximum	Minimum	Maximum			Minimum										
200A 8	216.3 8.515	217.9 8.578	215.5 8.484	19.05 0.750	11.91 0.469	211.6 8.331	211.0 8.306	2.34 0.092	2.77 0.109	220.7 8.69						
250A 10	267.4 10.528	269.0 10.591	266.6 10.497	19.05 0.750	11.91 0.469	262.6 10.340	262.0 10.313	2.39 0.094	3.40 0.134	271.8 10.70						
300A 12	318.5 12.539	320.1 12.602	317.7 12.508	19.05 0.750	11.91 0.469	313.0 12.321	312.2 12.291	2.77 0.109	3.96 0.156	322.8 12.71						

@ Always refer to the I-100 handbook for current grooving specifications.

† On roll grooved pipe, Allowable Pipe End Separation and Deflection from center line will be ½ values listed for cut grooved pipe.

#### IMPORTANT NOTE:

Only the above are provided as shown. Other JIS sizes are similar to ANSI, DIN, etc..

#### GROOVE DIMENSION NOTES:

##### Column 1: Nominal JIS pipe size

##### Column 2: Metric (JIS) Outside Diameter

The outside diameter of roll grooved pipe shall not vary more than the tolerance listed. For (JIS) metric pipe, the maximum allowable tolerance from square cut ends is 1.52 mm for sizes 200 mm and above, measured from true square line.

##### Column 3: Gasket Seat

The pipe surface shall be free from indentations, roll marks, and projections from the end of the pipe to the groove, to provide a leak-tight seal for the gasket. All loose paint, scale, dirt, chips, grease and rust must be removed. It continues to be Victaulic's first recommendation that pipe be square cut. When using beveled pipe contact Victaulic for details. Gasket seat "A" is measured from the end of the pipe. IMPORTANT: Roll grooving of beveled end pipe may result in unacceptable pipe end flare. See column 8.

##### Column 4: Groove Width

Bottom of groove to be free of loose dirt, chips and scale that may interfere with proper coupling assembly. Corners at bottom of groove must be radiused. For (JIS) metric pipe, 1.3Rmm for 200mm and up.

##### Column 5: Groove Outside Diameter

The groove must be uniform depth for the entire tubing circumference. Groove must be maintained within the "C" diameter tolerance listed.

##### Column 6: Groove Depth

For reference only. Groove must conform to the groove diameter "C" listed.

##### Column 7: Minimum Allowable Wall Thickness

This is the minimum wall thickness which may be roll or cut grooved.

##### Column 8: Maximum Allowable End Flare Diameter


Measured at the most extreme tubing end diameter. Measured at the most extreme pipe end diameter square cut or beveled.

# Pipe Preparation

## Groove Dimensions

### CUT GROOVE SPECIFICATIONS NOTES FOR JAPANESE INDUSTRIAL STANDARD PIPE (JIS)

For Complete Information Request Publication **25.08**



STANDARD CUT GROOVE SPECIFICATIONS – JAPANESE INDUSTRIAL STANDARD PIPE @

1 Nominal Size mm Inches	2 Dimensions – mm/Inches								
	Pipe Outside Diameter O.D.			3 A Gasket Seat ± 0.76 ± 0.03	4 B Grv. Width ± 0.76 ± 0.03	C Groove Diameter		6 D Groove Depth ref.	7 T Minimum Allow. Wall Thk.
	Basic	Maximum	Minimum			Maximum	Minimum		
200A 8	216.3 8.515	217.9 8.578	215.5 8.484	19.05 0.750	11.13 0.438	211.6 8.331	211.0 8.306	2.34 0.092	6.05 0.238
250A 10	267.4 10.528	269.0 10.591	266.6 10.497	19.05 0.750	12.70 0.500	262.6 10.340	262.0 10.313	2.39 0.094	6.35 0.250
300A 12	318.5 12.539	320.1 12.602	317.7 12.508	19.05 0.750	12.70 0.500	313.0 12.321	312.2 12.291	2.77 0.109	7.09 0.279

@ Always refer to the I-100 handbook for current grooving specifications.

† On roll grooved pipe, Allowable Pipe End Separation and Deflection from center line will be ½ values listed for cut grooved pipe.

#### IMPORTANT NOTE:

Only the above are provided as shown. Other JIS sizes are similar to ANSI, DIN, etc..

#### GROOVE DIMENSION NOTES:

##### Column 1: Nominal JIS pipe size

##### Column 2: Metric (JIS) Outside Diameter

The outside diameter of cut grooved pipe shall not vary more than the tolerance listed. For (JIS) metric pipe, the maximum allowable tolerance from square cut ends is 1.52 mm for sizes 200 mm and above, measured from true square line.

##### Column 3: Gasket Seat

The pipe surface shall be free from indentations, roll marks, and projections from the end of the pipe to the groove, to provide a leak-tight seal for the gasket. All loose paint, scale, dirt, chips, grease and rust must be removed. It continues to be Victaulic's first recommendation that pipe be square cut. When using beveled pipe contact Victaulic for details. Gasket seat "A" is measured from the end of the pipe.

##### Column 4: Groove Width

Bottom of groove to be free of loose dirt, chips and scale that may interfere with proper coupling assembly.

##### Column 5: Groove Outside Diameter

The groove must be uniform depth for the entire tubing circumference. Groove must be maintained within the "C" diameter tolerance listed.

##### Column 6: Groove Depth

For reference only. Groove must conform to the groove diameter "C" listed.

##### Column 7: Minimum Allowable Wall Thickness

This is the minimum wall thickness which may be roll or cut grooved.



# Product Index

Style No.	Product Description	Page No.	Publ. No.
<b>SECTION 1: COUPLINGS</b>			
Style 07	Zero-Flex Rigid Coupling	1-5	06.02
Style HP-70	Rigid Coupling	1-16	06.12
Style 72	Outlet Coupling	1-13	06.10
Style 75	Flexible Coupling	1-8	06.05
Style 77	Standard Flexible Coupling	1-6	06.04
Style 78	Snap-Joint Coupling	1-12	06.09
Style 741	Vic-Flange Adapter ANSI Class 150	1-9	06.06
Style 743	Vic-Flange Adapter ANSI Class 300	1-10	06.06
Style 750	Reducing Coupling	1-11	06.08
Style 791	Vic-Boltless Coupling	1-14	06.11
Style 792	Vic-Boltless Assembly Tool	1-14	06.11
Style 808	High Pressure Coupling	1-15	15.01
<b>ENDSEAL COUPLING AND FITTINGS</b>			
Style HP-70ES	EndSeal Coupling for Plastic Coated Pipe	1-17	06.13
No. 22-ES	EndSeal Header Tee for Plastic Coated Pipe	1-18	07.03
No. 35-ES	EndSeal Cross for Plastic Coated Pipe	1-18	07.03
No. 62-ES	EndSeal 90° Elbow for Plastic Coated Pipe	1-18	07.03
No. 63-ES	EndSeal 45° Elbow for Plastic Coated Pipe	1-18	07.03
No. 64-ES	EndSeal Tee for Plastic Coated Pipe	1-18	07.03
<b>SECTION 2: FITTINGS</b>			
No. 10	90° Elbow	2-3	07.01
No. 10-DR	Drain Elbow	2-4	10.05
No. 11	45° Elbow	2-3	07.01
No. 12	22½° Elbow	2-3	07.01
No. 13	11¼° Elbow	2-3	07.01
No. 18	90° Adapter Elbow	2-6	07.01
No. 19	45° Adapter Elbow	2-6	07.01
No. 20	Tee	2-7	07.01
No. 21	Bullhead Tee	2-9	07.01
No. 25	Reducing Tee	2-8	07.01
No. 27	Standpipe Tee	2-9	07.01
No. 29	Reducing Tee with Threaded Branch	2-8	07.01
No. 29M	Tee with Threaded Branch	2-7	07.01
No. 30	45° Lateral	2-10	07.01
No. 30-R	45° Reducing Lateral	2-10	07.01
No. 32	Tee Wye	2-11	07.01
No. 32-R	Reducing Tee Wye	2-11	07.01
No. 33	True Wye	2-7	07.01
No. 35	Cross	2-7	07.01
No. 40	Adapter Nipple – Grv. x Thd.	2-12	07.01
No. 41	Flange Adapter Nipple – ANSI Class 125	2-13	07.01
No. 42	Adapter Nipple – Grv. x Bev.	2-12	07.01
No. 43	Adapter Nipple – Grv. x Grv.	2-12	07.01
No. 45	Flange Adapter Nipple – ANSI Class 150	2-13	07.01

Style No.	Product Description	Page No.	Publ. No.
<b>SECTION 2: FITTINGS</b>			
No. 46	Flange Adapter Nipple – ANSI Class 300	2-13	07.01
No. 48	Hose Nipple	2-15	07.01
No. 50	Concentric Reducer	2-16	07.01
No. 51	Eccentric Reducer	2-16	07.01
No. 52	Small Threaded Reducer	2-18	07.01
No. 52F	Small Threaded Reducer (BSPT)	2-18	07.01
No. 53	Swaged Nipple – Grv. x Grv.	2-14	07.01
No. 54	Swaged Nipple – Grv. x Thd.	2-14	07.01
No. 55	Swaged Nipple – Thd. x Grv.	2-14	07.01
No. 60	Cap	2-12	07.01
No. 61	Bull Plug	2-9	07.01
No. 80	Female Threaded Adapter	2-15	07.01
No. 100	90° 1½ D Long Radius Elbow	2-3	07.01
No. 100-3D	90° 1½ D Long Radius Elbow	2-5	07.01
No. 110	45° 3D Long Radius Elbow	2-3	07.01
No. 110-3D	45° 3D Long Radius Elbow	2-5	07.01
No. R-10F	Reducing Base Elbow – Grv. x Flange	2-5	07.01
No. R-10G	Reducing Base Elbow – Grv. x Grv.	2-5	07.01
<b>SECTION 3: VALVES</b>			
Series 377	Vic Plug Balancing Valve	3-15	08.12
Series 704	Vic-235 Butterfly Valve	3-5	08.24
Series 700	Butterfly Valve	3-6	08.05
Series 706	Butterfly Valve	3-7	08.17
Series 712	Swinger Swing Check Valve – 300 psi/2065 kPa	3-11	08.11
Series 713	Swinger Swing Check Valve – 1000 psi/6900 kPa	3-11	08.11
Series 716	Vic-Check Valve	3-9	08.08
Series 722	Brass Body Ball Valve	3-12	08.15
Series 726	Vic-Ball Valve	3-13	08.23
Series 779	Venturi Check Valve	3-10	08.10
—	Triple Service Valve Assembly	3-8	08.09
Vic-300 MS	Vic-300 MasterSeal Butterfly Valve	3-3	08.20
<b>SECTION 4: ACCESSORIES</b>			
No. 47	Dielectric Waterway Fitting	4-12	09.07
Series 730	Vic-Strainer – Tee Type	4-8	09.02
Series 731-D	Suction Diffuser with ANSI Class 150 Flange	4-3	09.14
	Suction Diffuser with PN10 Flange	4-4	09.14
	Suction Diffuser with PN16 Flange	4-4	09.14
	Suction Diffuser GB Flange	4-5	09.14
	Suction Diffuser with JIS 10K Flange	4-6	09.14
	Suction Diffuser with Australian Flange	4-8	09.14
Series 732	Vic-Strainer – Wye Type	4-9	09.03
Style 150	Mover Expansion Joint	4-10	09.04
Style 155	Standard Expansion Joint	4-11	09.05
<b>SECTION 5: ADVANCED GROOVE SYSTEM (AGS)</b>			
Style W07	Rigid Coupling	5-3	20.02
Style W77	Flexible Coupling	5-4	20.03
Style W89	Rigid Coupling for Stainless Steel Pipe	5-5	20.15
Style W741	AGS Vic-Flange Adapter	5-6	20.04

# Product Index

Style No.	Product Description	Page No.	Publ. No.
No. W10	90° Elbow	5-7	20.05
No. W11	45° Elbow	5-7	20.05
No. W12	22½° Elbow	5-7	20.05
No. W13	11¼° Elbow	5-7	20.05
No. W20	Tee	5-7	20.05
No. W25	Reducing Tee	5-8	20.05
No. W30	45° Lateral	5-9	20.05
No. W30-R	45° Reducing Lateral	5-9	20.05
No. W33	True Wye	5-7	20.05
No. W35	Cross	5-7	20.05
No. W42	Adapter Nipple – AGS Grv. x Bev.	5-10	20.05
No. W43	Adapter Nipple – AGS Grv. x AGS Grv.	5-10	20.05
No. W45-R	Flange Adapter Nipple – ANSI Class 150	5-10	20.05
No. W49	Adapter Nipple – AGS Grv. x Non AGS Grv.	5-10	20.05
No. W50	Concentric Reducer	5-11	20.05
No. W51	Eccentric Reducer	5-11	20.05
No. W60	Cap	5-10	20.05
No. W100	90° 1 ½ D Long Radius Elbow	5-7	20.05
No. W110	45° 1 ½ D Long Radius Elbow	5-7	20.05
Series W715	Dual Disc Vic-Check Valve	5-12	20.08
Series W730	Vic-Strainer – Tee Type	5-16	20.11
Series W731-I	Suction Diffuser	5-15	20.10
Style W732	Wye Type Strainer	5-17	20.19
Vic-300 AGS	Vic-300 AGS Butterfly Valve	5-13	20.06
<b>SECTION 6: HOLE CUT PIPING SYSTEM</b>			
Style 920	Mechanical-T Bolted Branch Outlet	6-2	11.02
Style 920	Mechanical-T Bolted Branch Outlet Cross	6-4	11.03
Style 920N	Mechanical-T Bolted Branch Outlet	6-2	11.02
Style 920N	Mechanical-T Bolted Branch Outlet Cross	6-4	11.03
Style 923	Vic-Let Strapless Outlet	6-5	11.05
Style 924	Vic-O-Well Strapless Thermometer Outlet	6-6	11.06
<b>SECTION 7: PLAIN END PIPING SYSTEM FOR STEEL PIPE</b>			
Style 99	Roust-A-Bout Coupling	7-3	14.02
No. 10P	90° Elbow	7-4	14.04
No. 11P	45° Elbow	7-4	14.04
No. 20P	Tee	7-5	14.04
No. 25P	Reducing Tee	7-6	14.04
No. 30P	45° Lateral	7-6	14.04
No. 33P	True Wye	7-5	14.04
No. 35P	Cross	7-5	14.04
No. 40P	Adapter Nipple – Plain End x Thd.	7-8	14.04
No. 42P	Adapter Nipple – Plain End x Bev.	7-8	14.04
No. 43P	Adapter Nipple – Plain End x Grv.	7-8	14.04
No. 53P	Swaged Nipple	7-7	14.04
No. 61P	Bull Plug	7-5	14.04

Style No.	Product Description	Page No.	Publ. No.
<b>SECTION 8: GROOVED SYSTEM FOR STAINLESS STEEL PIPE</b>			
Style 775	Flexible Coupling	8-5	17.03
Style 89	Rigid Coupling	8-4	17.24
Style 441	Vic-Flange Adapter ANSI Class 150	8-7	17.27
Style 475	Flexible Coupling	8-6	17.12
Style 489	Rigid Coupling	8-3	17.25
No. 410 SS	90° Elbow (SS ASTM A403)	8-8	17.04
No. 411 SS	45° Elbow (SS ASTM A403)	8-8	17.04
No. 420 SS	Tee (SS ASTM A403)	8-8	17.04
No. 425 SS	Reducing Tee (SS ASTM A403)	8-9	17.04
No. 450 SS	Concentric Reducer (SS ASTM A403)	8-9	17.04
No. 460 SS	Cap (SS ASTM A403)	8-9	17.04
Series 712S	Swinger Check Valve	8-12	17.08
Series 726S	Vic-Ball Valve	8-13	17.22
Series 763	Butterfly Valve	8-10	17.23
<b>SECTION 9: PRESSFIT SYSTEM FOR STAINLESS STEEL PIPE</b>			
<b>PRESSFIT SYSTEM 304</b>			
Series 589	Ball Valve	9-11	18.02
Style 547	Grooved End Union	9-9	18.02
Style 561	Weld Adapter	9-8	18.02
Style 565	Van Stone Flange Adapter	9-9	18.02
Style 582	Reducer Insert	9-10	18.02
Style 584	Threaded Union	9-8	18.02
Style 586	90° Short Tangent Elbow	9-5	18.02
Style 587	Transition Nipple	9-10	18.02
Style 588	Tee with Threaded Branch	9-6	18.02
Style 589	Ball Valve	9-11	18.02
Style 590	90° Elbow	9-5	18.02
Style 591	45° Elbow	9-5	18.02
Style 592	Tee	9-6	18.02
Style 593	Tee with Reducing Branch	9-7	18.02
Style 594	Concentric Reducer	9-10	18.02
Style 595	Flange Adapter	9-9	18.02
Style 596	Male Adapter	9-7	18.02
Style 597	Standard Coupling	9-4	18.02
Style 599	Female Threaded Adapter	9-8	18.02
<b>PRESSFIT SYSTEM 316</b>			
Style 507	Standard Coupling	9-4	18.01
Style 508	Slip Coupling	9-4	18.01
Style 548	Grooved End Union	9-9	18.01
Style 566	Van Stone Flange Adapter	9-9	18.01
Style 568	90° Short Tangent Elbow	9-5	18.01
Style 569	Ball Valve	9-12	18.01
Style 570	90° Elbow	9-5	18.01
Style 571	45° Elbow	9-5	18.01
Style 572	Tee	9-6	18.01
Style 573	Tee with Reducing Branch	9-7	18.01
Style 574	Concentric Reducer	9-10	18.01

# Product Index

Style No.	Product Description	Page No.	Publ. No.
Style 575	Flange Adapter	9-9	18.01
Style 576	Male Adapter	9-7	18.01
Style 577	Transition Nipple	9-10	18.01
Style 578	Tee with Threaded Branch	9-6	18.01
Style 579	Female Threaded Adapter	9-8	18.01
Style 583	Reducer Insert	9-10	18.01
Style 585	Threaded Union	9-8	18.01
<b>SECTION 10: PLAIN END PIPING SYSTEM FOR HDPE PIPE</b>			
Style 994	Vic-Flange Adapter ANSI Class 150	10-4	19.04
Style 995	Coupling	10-2	19.02
Style 997	Transition Coupling – HDPE to Steel	10-3	19.03
<b>SECTION 11: GROOVED COPPER PIPING SYSTEM</b>			
Style 606	Coupling (Style 606-CTS)	11-3	22.02
	Coupling (Style 606-AS)	11-4	22.10
	Coupling (Style 606-EN1057)	11-5	22.11
Style 622	Mechanical-T Bolted Branch Outlet	11-7	22.12
	Mechanical-T Bolted Branch Cross	11-7	22.12
Style 641	Vic-Flange Adapter (Style 641-CTS)	11-6	22.03
	Vic-Flange Adapter (Style 641-EN1057)	11-6	22.11
Series 608	Butterfly Valve (Series 608-CTS)	11-12	22.05
	Butterfly Valve (Series 608-AS)	11-13	22.10
	Butterfly Valve (Series 608-EN1057)	11-14	22.11
No. 610	90° Elbow (No. 610-CTS)	11-8	22.04
	90° Elbow (No. 610-EN1057)	11-9	22.11
No. 611	45° Elbow (No. 611-CTS)	11-8	22.04
	45° Elbow (No. 611-EN1057)	11-9	22.11
No. 620	Tee (No.620-CTS)	11-8	22.04
	Tee (No.620-EN1057)	11-9	22.11
No. 625	Reducing Tee Grv. x Grv. (No. 625-CTS)	11-10	22.04
	Reducing Tee Grv. x Grv. (No. 625-EN1057)	11-10	22.11
No. 626	Reducing Tee Grv. x Cup (No. 626-CTS)	11-10	22.04
	Reducing Tee Grv. x Cup (No. 626-EN1057)	11-10	22.11
No. 650	Con. Reducer Grv. x Grv. (No. 650-CTS)	11-11	22.04
	Con. Reducer Grv. x Grv. (No. 650-EN1057)	11-11	22.11
No. 652	Con. Reducer Grv. x Cup (No. 652-CTS)	11-11	22.04
	Con. Reducer Grv. x Cup (No. 652-EN1057)	11-11	22.11
No. 660	Cap (No. 660-CTS)	11-8	22.04
	Cap (No. 660-EN1057)	11-9	22.11
No. 660B	Cap (No. 660B-EN1057)	11-9	22.11
<b>SECTION 12: GROOVED SYSTEM FOR ALUMINIUM PIPE</b>			
No. 10-A	90° Elbow	12-4	21.03
No. 11-A	45° Elbow	12-4	21.03
No. 20-A	Tee	12-4	21.03
No. 40-A	Adapter Nipple Grv. x Thd.	12-5	21.03
No. 42-A	Adapter Nipple Grv. x Bev.	12-5	21.03
No. 43-A	Adapter Nipple Grv. x Grv.	12-5	21.03
No. 50-A	Reducer	12-5	21.03

Style No.	Product Description	Page No.	Publ. No.
No. 60-A	Cap	12-4	21.03
Style 77-A	Flexible Coupling	12-2	21.01
Style 78-A	Snap-Joint Coupling	12-3	21.02
<b>SECTION 13: DEPEND-O-LOK</b>			
<b>SECTION 14: VIC-RING SYSTEM</b>			
Style 22	Vic-Ring Coupling	14-2	16.02
Style 31	Vic-Ring Coupling	14-3	16.03
Style 41	Vic-Ring Coupling	14-4	16.04
Style 44	Vic-Ring Coupling	14-5	16.05
<b>SECTION 15: AQUAMINE REUSABLE PVC PRODUCTS</b>			
<b>SECTION 16: GASKETS</b>			
<b>SECTION 17: PIPE PREPARATION TOOLS</b>			
<b>ROLL GROOVING TOOLS</b>			
VE12	Groove In-Place – Steel	17-3	24.01
VE26	Groove In-Place	17-3	24.01
VE46	Groove In-Place	17-3	24.01
VE107	Groove-N-Go	17-4	24.01
VE226	Portable Roll Groover	17-3	24.01
VE271FSD	Field Roll Groover	17-4	24.01
VE273SFS	Field Roll Groover	17-4	24.01
VE268	Shop Roll Groover	17-5	24.01
VE414MC	Vic-Easy Shop Roll Groover	17-5	24.01
VE417FSD	Field Roll Groover	17-4	24.01
VE460	Production Roll Groover	17-5	24.01
<b>CUT GROOVING TOOLS</b>			
VG28GD	Adjustable Cut Groover	17-9	24.01
Vic-Groover	Individual Cut Groover	17-9	24.01
VG824	Adjustable Cut Groover	17-9	24.01
VPG26	PVC Plastic Groover	17-10	24.01
VPG824	PVC Plastic Groover	17-10	24.01
<b>PRESSFIT TOOLS</b>			
PFT505	Pressfit Tool	17-11	24.01
PFT509	Pressfit Tool	17-11	24.01
<b>PIPE CUTTING TOOLS</b>			
HCT908	Hole Cutting Tool	17-11	24.01
VHCT900	Vic Hole Cutting Tool	17-11	24.01
Vic-Tap II	Hole Cutting Tool	17-11	24.01
VCT1	Cut-Off Tool – Manual	17-12	24.01
VCT2	Cut-Off Tool – Manual	17-12	24.01
<b>ACCESSORIES</b>			
VPD753	Power Drive	17-13	24.01
Power Mule	Power Drive	17-13	24.01
VAPS112	Small Pipe Stand	17-13	24.01
VAPS224	Heavy Duty Pipe Stand	17-14	24.01
VAPS1627	Vic-Easy Stand	17-14	24.01
LSCR	Speed Reduction Control	17-14	24.01
Pipe Tape	Diameter Tape	17-14	24.01



# Warranty

---

We warrant all products to be free from defects in materials and workmanship under normal conditions of use and service. Our obligation under this warranty is limited to repairing or replacing at our option at our factory any product which shall within one year after delivery to original buyer be returned with transportation charges prepaid, and which our examination shall show to our satisfaction to have been defective.

THIS WARRANTY IS MADE EXPRESSLY IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THE BUYER'S SOLE AND EXCLUSIVE REMEDY SHALL BE FOR THE REPAIR OR REPLACEMENT OF DEFECTIVE PRODUCTS AS PROVIDED HEREIN. THE BUYER AGREES THAT NO OTHER REMEDY (INCLUDING, BUT NOT LIMITED TO, INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR LOST PROFITS, LOST SALES, INJURY TO PERSON OR PROPERTY OR ANY OTHER INCIDENTAL OR CONSEQUENTIAL LOSS) SHALL BE AVAILABLE TO HIM.

Victaulic neither assumes nor authorizes any person to assume for it any other liability in connection with the sale of such products.

**This warranty shall not apply to any product which has been subject to misuse, negligence or accident, which has been repaired or altered in any manner outside of Victaulic's factory or which has been used in a manner contrary to Victaulic's instructions or recommendations. Victaulic shall not be responsible for design errors due to inaccurate or incomplete information supplied by Buyer or its representatives**

*Effective February 4, 2003*

---

All products shall be installed in accordance with current Victaulic installation/assembly instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.

# Piping Software

The Victaulic software solutions group helps to increase piping project productivity by offering free software packages to aid you in developing and drawing Victaulic piping systems. In addition, Victaulic components can now be found in many of the major third party software drawing packages listed below:

## THIRD PARTY SOFTWARE

Aveva (Cadcentre) PDMS  
Bentley – AutoPlant  
Bentley – PlantSpace  
CEA Systems – Plant 4D  
Coade – CADWorx Pipe  
Hydratec – HydraCAD (Fire Protection)  
Intergraph PDS

Find software online at [www.victaulic.com/software](http://www.victaulic.com/software)

Demos of our software packages can be downloaded from our website or the complete software package can be ordered online in CD-ROM format. Visit our website to begin accessing our electronic services, or call 1-800-PICK-VIC.



*Vic-Blocks – designed specifically for AutoCAD users, Vic-Blocks 3D is a dimensionally accurate, three-dimensional block library that was developed to assist with Victaulic piping system layouts. It includes block symbols representing the main product line, drawn at full size.*

## Vic-Blocks

Both Vic-Blocks 2D and Vic-Blocks 3D are compatible with the AutoCad two- and three-dimensional library system. AutoCad is available free, to assist in drawing Victaulic couplings, fittings and valves. Demonstration modules are available for viewing on our website.

## Vic-Cells


Designed specifically for MicroStation users, Vic-Cells is a dimensionally accurate 2D compilation of cell libraries developed to assist with Victaulic piping system layouts.

## Vic-PDS Piping Specs

Vic-PDS piping specs are a set of Intergraph Plant Design System (PDS) piping specifications, allowing users to access and use Victaulic products in their PDS piping systems design.

## Vic-PDMS Piping Catalog

Vic-PDMS Piping Catalogs is a set of Aveva (Cadcentre) plant design management system (PDMS) catalogs that allows users to access and use Victaulic products in their PDMS piping systems designs.

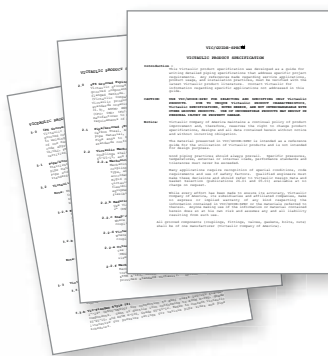

## Vic-Guide Spec

Vic-Guide Spec provides typical specifications for most Victaulic products. The data can be directly cut and pasted into your specifications. Vic-Guide Spec is available in PDF or Word format.

\*AutoCad is a registered trademark of Autodesk



World Class Service and Support

## Piping. Systems. Solutions.



### Value-added services

#### Construction Piping Services (CPS)

Our Construction Piping Services group can help you make effective and efficient use of Victaulic piping systems through its estimating, project management and drawing package expertise and services.

CPS can be reached by email at [cps@victaulic.com](mailto:cps@victaulic.com).

CPS offers the following:

#### VALUE ANALYSIS

Analyzing contract drawings provided by you, CPS will develop cost/pricing and cost comparison summaries of Victaulic systems versus welded, flanged, threaded and other mechanical pipe joining systems using current street prices for materials and recent labor times calculated from trade association standards.

#### PROJECT MANAGEMENT

CPS can provide quotes for preparation of detailed piping drawings for fabrication and erection, including pipe routing layout; sectional views and isometric drawings; and cut sheets and bills of material. A CPS project coordinator is assigned to begin tracking all the necessary documentation, including organizing the delivery of material according to your construction schedule.

#### FIELD SERVICE

Victaulic is the only mechanical piping systems manufacturer with 200+ factory-trained piping specialists worldwide to service your needs.

#### ENGINEERED PRODUCTS

Through our engineered products services, special attention is paid to projects that require special alloys, non-ferrous materials, special coatings or non-standard or special code applications. Contact [engprod@victaulic.com](mailto:engprod@victaulic.com) for an evaluation.

Standing alongside every Victaulic product and mechanical piping system solution is a service and support team ready to assist you with your next project.

Our staff of experienced sales representatives, on-site training personnel and engineering professionals are a phone call away for help in facilitating the evaluation, planning and fulfillment of your piping system needs.

#### [www.victaulic.com](http://www.victaulic.com)

For additional information about our products and services including a library of global projects to view, visit us on the web. From there you can easily access the most up-to-date product information organized by market and by product type.

# Piping. Systems. Solutions.

[www.victaulic.com](http://www.victaulic.com)

The Victaulic website is an information resource that can help you with your piping projects. Among the many resources available at the site:

- Fully searchable product and project databases
- Free product submittals
- Free product literature
- Free product animation files
- Piping software demos and modules
- Information on new product innovations
- Support services, and more...



## VICTAULIC GLOBAL CONTACT INFORMATION

### US & WORLD HEADQUARTERS

P.O. Box 31  
Easton, PA 18044-0031 USA  
4901 Kesslersville Road  
Easton, PA 18040 USA  
1-800-PICK-VIC  
(+1-800-742-5842)  
(within North America)  
+1-610-559-3300  
+1-610-250-8817 (fax)  
[pickvic@victaulic.com](mailto:pickvic@victaulic.com)

### CANADA

123 Newkirk Road  
Richmond Hill, ON L4C 3G5  
+1-905-884-7444  
+1-905-884-9774 (fax)  
[viccanada@victaulic.com](mailto:viccanada@victaulic.com)

### CENTRAL AND SOUTH AMERICA

P.O. Box 31  
Easton, PA 18044-0031 USA  
4901 Kesslersville Road  
Easton, PA 18040 USA  
+1-610-559-3300  
+1-610-559-3608 (fax)  
[vical@victaulic.com](mailto:vical@victaulic.com)

### UNITED KINGDOM

Units B1 & B2, SG1 Industrial Park  
Cockerell Close  
Gunnels Wood Road  
Stevenage  
Hertfordshire, SG1 2NB (UK)  
+44-(0)-1438-310-690  
+44-(0)-1438-310-699 (fax)  
0124-60219 (direct to Ireland  
within the UK)  
[viceuro@victaulic.be](mailto:viceuro@victaulic.be)

### EUROPE

Prijkelstraat 36  
9810 Nazareth, Belgium  
+32-9-381-15-00  
+32-9-380-44-38 (fax)  
[viceuro@victaulic.be](mailto:viceuro@victaulic.be)

### MIDDLE EAST

P.O. Box 17683  
Unit XB 8  
Jebel Ali Free Zone  
Dubai  
United Arab Emirates  
+971-4-883-88-70  
+971-4-883-88-60 (fax)

### ASIA

Unit 06-10, Floor 3A  
A Mansion 291 Fumin Road  
Shanghai, China 200031  
+86-21-6170-1222  
+86-21-6170-1221 (fax)  
[vicap@victaulic.com](mailto:vicap@victaulic.com)

### AUSTRALIA AND NEW ZEALAND

7 Chambers Road  
Unit 1  
Altona North, Victoria  
Australia 3025

1-300-PIC-VIC  
(+1-300-742-842)  
(within Australia)  
+61-39392-4000  
+61-39399-9905 (fax)  
[vicaust@victaulic.com](mailto:vicaust@victaulic.com)

[www.victaulic.com](http://www.victaulic.com)

UPDATED 1/2010

G-103-AP 4745 REV N

VICTAULIC IS A REGISTERED TRADEMARK OF VICTAULIC COMPANY. © 2010 VICTAULIC COMPANY. ALL RIGHTS RESERVED.

